


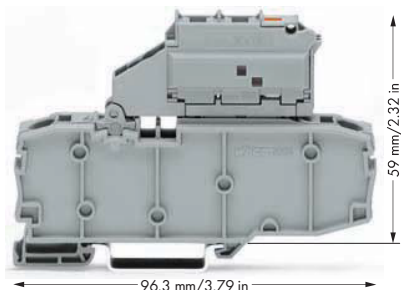



# Fuse Disconnect Terminal Blocks with Pivoting Fuse Holder for Miniature Metric Fuses 1/4" x 1 1/4", 2006 Series

0.5 - 6 (10) mm <sup>2</sup> ① AWG 20 - 8 800 V/8 kV/3 ② I <sub>N</sub> 10 A  Terminal block width 10.4 mm / 0.409 in  13 - 15 mm / 0.55 in ③	0.5 - 6 (10) mm <sup>2</sup> ① AWG 20 - 8 800 V/8 kV/3 ② I <sub>N</sub> 10 A  Terminal block width 10.4 mm / 0.409 in  13 - 15 mm / 0.55 in ③
---	---

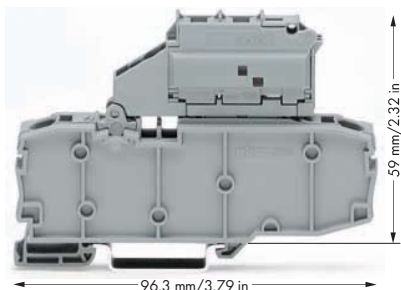

- ① Conductor sizes: 0.5 mm<sup>2</sup> - 10 mm<sup>2</sup> "s + f-st"; Push-in conductor sizes: 1 mm<sup>2</sup> - 10 mm<sup>2</sup> "s" and 1.5 mm<sup>2</sup> - 6 mm<sup>2</sup> "insulated ferrule, 12 mm"
- ② 800 V = rated voltage  
8 kV = rated surge voltage  
3 = pollution degree  
(see Section 14)
- ③ Strip length, see packaging or instructions.
- ④ See application notes for: Star point jumper, page 140

Item No.	Pack. Unit	Item No.	Pack. Unit
<b>Fuse disconnect terminal block with pivoting fuse holder and end plate, without blown fuse indication</b>		<b>Fuse disconnect terminal block with pivoting fuse holder and end plate, gray, with blown fuse indication by LED</b>	
Nominal voltage and current are given by the fuse. for miniature metric fuses 1/4" x 1 1/4"		Nominal voltage and current are given by the LED or fuse. Leakage current in case of blown fuse: LED 2 mA, for miniature metric fuses 1/4" x 1 1/4"	
● gray	2006-1631/099-000 25	● 12 - 30 V	2006-1631/1099-541 25
		● 30 - 65 V	2006-1631/1099-542 25
		● 120 V	2006-1631/1099-867 25
		● 230 V	2006-1631/1099-836 25
		● 380 - 500 V	2006-1631/1099-859 25

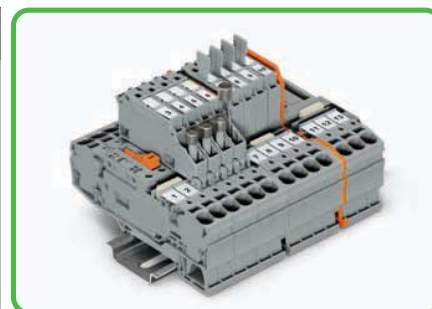









Pivoting fuse holder with spare fuse holders

Protective warning markers must be applied individually. Due to the 10.4 mm/0.409 in width of the fuse terminal blocks with pivoting fuse holder, 2002 Series jumpers must be used.

## 2006 Series Accessories

Appropriate marking systems: WMB/Marking strips (see Section 13)

<b>End plate for fuse terminal blocks,</b> 2 mm thick  orange 2006-992 100 (4x25) gray 2006-991 100 (4x25)	<b>Screwless end stop,</b> for DIN 35 rail, 6 mm wide  gray 249-116 100 (4x25)
<b>Push-in type jumper bar, insulated,</b> I <sub>N</sub> 25 A, light gray  from 1 to 3 2002-433 200 (8x25) from 1 to 5 2002-435 100 (4x25) from 1 to 7 2002-437 100 (4x25) from 1 to 9 2002-439 100 (4x25)	<b>Screwless end stop,</b> for DIN 35 rail, 10 mm wide  gray 249-117 50 (2x25)
<b>Star point jumper, insulated,</b> ④ I <sub>N</sub> = I <sub>N</sub> terminal block, light gray 1-3-5 2002-405/011-000  100 (4x25)	
<b>Protective warning marker,</b> with high-voltage symbol, black, for 5 terminal blocks  yellow 2006-115 100 (4x25)	
<b>WMB Multi marking system,</b> 10 strips with 10 markers per card, stretchable 5 - 5.2 mm plain 793-5501 5 	
<b>Test plug,</b> with 500 mm cable, 2 mm Ø red 210-136 50 	

## Miniature metric fuses

Series Item No.	Overload and short circuit protection		Short circuit protection only	
	Individual argmt.	Group argmt.	Individual argmt.	Group argmt.
Fused disconnect terminal blocks				
2006-1611	7.5	1.6 W	1.6 W	2.5 W
2006-1621	7.5	1.6 W	1.6 W	2.5 W
2006-1631	7.5	1.6 W	1.6 W	2.5 W
2006-1631 /099...	10.4	2.5 W	2.5 W	2.5 W
2006-1631 /1099...	10.4	2.5 W	2.5 W	2.5 W

When selecting miniature metric fuses, the maximum power loss listed below should not be exceeded. The power loss is determined according to IEC or EN 60947-7-3/VDE 0611-6 at 23 °C. The temperature rise of the terminal blocks must be checked according to their application and mounting. Higher ambient temperatures represent an additional impact on miniature metric fuses. Therefore, in such applications the rated current must be reduced if necessary. More details are available from the fuse manufacturer.