


Plexo weatherproof boxes


increased depth PVC range (continued)

■ Dimensions (mm)


Cat. No. 0922 84

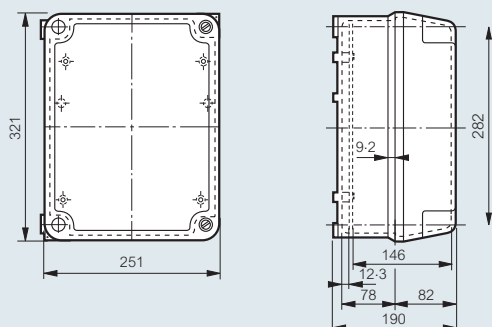

Fixing dimensions

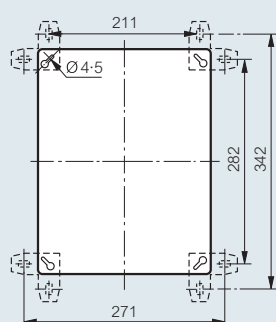

■ Mounting plates for PVC boxes

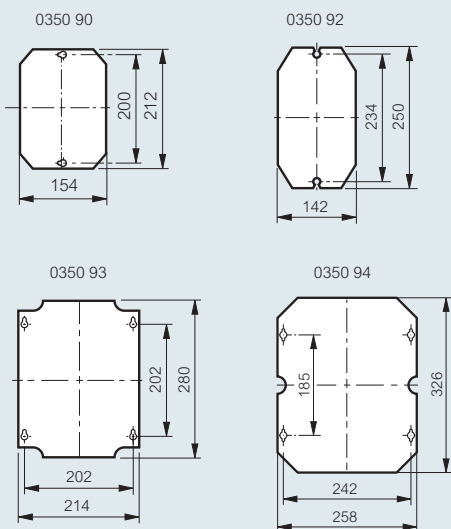

terminal strips

Nylbloc



Pack	Cat. Nos.	Nylbloc terminal strips					
		12 way strips with captive screws Supplied with screws undone Flame retardant polypropylene (-25 °C to +100 °C) Insulation voltage : 250 V according to EN 60998-2-1 Use at 400 V integrated in a series of products that comply with the requirements of EN 60664-1, pollution degree 2, overload category III Ambient temperature from -25 °C to +55 °C					
		Capacity (mm ²)	Nom. rating (A)	Diameter Ø	Current max. (A)	Dimensions (mm)	
	Black						
10	0342 11	4	2.5	2.5	24	15.6 x 94 x 12.3	
10	0342 13	6	6	3.5	41	18 x 107 x 14.4	
10	0342 15	10	10	4.5	57	20.8 x 135.1 x 17.4	
10	0342 17	16	16	5.5	76	24.2 x 156.8 x 22.5	
10	0342 19	25	25	7	101	33 x 214 x 27.5	
	White						
10	0342 21	4	2.5	2.5	24	15.6 x 94 x 12.3	
10	0342 23	6	6	3.5	41	18 x 107 x 14.4	
10	0342 25	10	10	4.5	57	20.8 x 135 x 17.4	
10	0342 27	16	16	5.5	76	24.2 x 156.8 x 22.5	



For Plexo weatherproof boxes

see p. 36-40