

# Plexo

## IP 55 modular mechanisms (continued)




0695 91



0695 17



0696 51

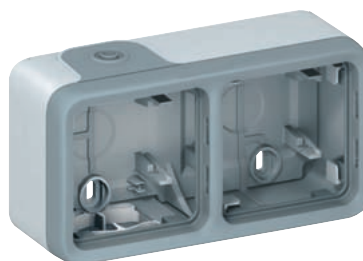

0696 72



0695 80



0898 40

IP 55 - IK 07

Grey RAL 7035 / 7016



Polycarbonate/polypropylene housing




Temp. rating : -20 to +40 °C (+50 °C for short periods)


Supplied with 1 flat + 1 stepped gland






Captive terminal screws supplied in backed-off position




Installation with surface mounting boxes or flush mounting frames

Pack	Cat. Nos.	<b>Pilot light</b>	
10	0695 83	 Accepts E10 lamps - 5 W max. Supplied with lamp Cat. No. 0898 40 Supplied without diffusers (see below)	
<b>Diffusers for pilot light</b>			
10	0695 88	 Colourless	
10	0695 89		Green
10	0695 90		Orange
10	0695 91		Red

Pack	Cat. Nos.	<b>Light sensitive switches - 230 V~</b>
<b>Light sensitive switch 1 function IP 55 - IP 07</b>		
5	0695 17	 Can be used to switch a lighting circuit "ON" and "OFF" based on light conditions (nightfall, daybreak) Supplied in one piece, including photo electric cell Maximum load : - 1400 W incandescent and halogen lamps 230 V~ - 400 VA fluorescent tubes Luminosity threshold : 0.5 to 1500 lux
<b>Photo-electric cell IP 55</b>		
5	0695 18	 For use with modular Microlux D light sensitive switch Cat. No. 0037 21 (see below)
<b>Microlux D light sensitive switch</b>		
 Controls lighting according to the time and light level Supply voltage : 230 V~ ±10% 50/60 Hz Working reserve : 100 hours Accuracy of time switch : 1 second per day Number of programmes : 28/14 per channel Range of light intensity : 2-60 000 lux Switching step : 1 minute Manual switch : override/programme/stop Automatic changeover to summer/winter time Temporary override with automatic return to programme		
1	0037 21	10 A - 250 V~ cos φ = 1 1 changeover contact with 60 sec delay
		No. of 17.5 mm modules 2

Pack	Cat. Nos.	<b>Socket outlet 13 A - 250 V~</b>
10	0695 85	 Panel mounting 1 gang - 13 A socket 2P + E screw terminals

Pack	Cat. Nos.	<b>Back boxes and support frames</b>
<b>Surface mounting boxes with membrane glands</b>		
Equipped with removable membrane glands Direct entry of cables (No need to be cut)		
10	0696 51	 1 gang - 1 entry
5	0696 72	 2 gang - 1 entry
<b>Surface mounting boxes with membrane glands</b>		
Grey		
5	0696 56	 1 gang - 1 entry
5	0696 78	 2 gang, horizontal mounting - 2 entries (2 top)
<b>Flush mounting support frame</b>		
10	0696 81	 1 gang For Plexo modular mechanisms

Pack	Cat. Nos.	<b>Accessories</b>
<b>Modular back box IP 55 - IK 05</b>		
To receive Arteor modules (max. 2 modules)		
10	0695 80	 Adaptor with smoked polycarbonate flap
<b>Lamps</b>		
10	0694 98	 230 V - 1 mA orange (indicator)
10	0694 97	
10	0898 40	 <b>E10 for pilot light</b> 230 V - 5 W