


Hypra® Prisinter IP 44/55 - LV 16/32/63 A selection chart

Conform to :
 BS EN 60309-1,
 BS EN 60309-2,
 IP 44 when plug inserted
 IP 54 with cover closed
 or used with IP 66/67-55
 straight plugs
 IP 55 with cover closed
 or used with IP 66/67-55
 angled plugs
 IK 09 (plastic)
 IK 10 (metal)
 Self-extinguishing : 960 °C
 650 °C for housing
 Temp. rating :
 -20 °C to +100 °C

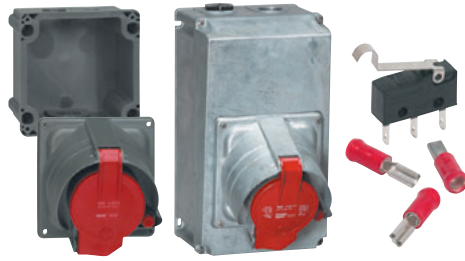

Technical information and dimensions (p. 170-171)

			Prisinter				Auxiliary c/o contact microswitch
			Panel mounting sockets		Surface mounting sockets		
LV			METAL	PLASTIC	METAL	PLASTIC	
100 to 130 V 50/60 Hz	16 A	2 P + ⊥	–	0519 10	–	0519 10+ 0520 49	0521 96
		2 P + ⊥	–	0520 02	–	0520 02+ 0520 49	0521 96
200 to 250 V 50/60 Hz	16 A	3 P + ⊥	–	0520 03	–	0520 03+ 0520 49	0521 96
		3 P + N + ⊥	–	0520 04	–	0520 04+ 0522 49	0521 96
		2 P + ⊥	–	0527 02	–	0527 02+ 0529 49	0521 96
	32 A	3 P + ⊥	–	0527 03	–	0527 03+ 0529 49	0521 96
380 to 415 V 50/60 Hz	16 A	3 P + ⊥	0522 13	0522 03	0522 13+ 0520 59	0522 03+ 0520 49	0521 96
		3 P + N + ⊥	0522 14	0522 04	0522 14+ 0529 59	0522 04+ 0522 49	0521 96
	32 A	3 P + ⊥	0529 13	0529 03	0529 13+ 0522 59	0529 03+ 0529 49	0521 96
		3 P + N + ⊥	0529 14	0529 04	0529 14+ 0522 59	0529 04+ 0529 49	0521 96
	63 A	3 P + ⊥	0538 00	0536 03	0538 00+ 0538 09	0536 03+ 0537 49	0521 96
		3 P + N + ⊥	0538 01	0536 04	0538 01+ 0538 09	0536 04+ 0537 49	0521 96

For voltages/arrangements not listed in this table, please contact us on +44 (0) 845 605 4333
 For pack quantities, see opposite and p.169

Hypra® Prisinter IP 44/55 - LV 16 A interlocked switched sockets



0520 02



Turn plug to lock in position and connect power



Press the isolator button to disconnect power and remove the plug



0522 13



0522 49



Technical information and dimensions (p. 170-171)
 Conformity to International Standards (p. 204)

Conform to BS EN 60309-1, BS EN 60309-2
 IP 44 when plug inserted
 IP 54 when used with IP 66/67-55 straight plugs
 IP 55 with cover closed or used with IP 66/67-55 angled plugs
 IK 09 (plastic)
 IK 10 (metal)
 Stainless steel screws
 Brass contacts

Pack	Cat. Nos.		Prisinter panel mounting sockets 16 A
	Metal	Plastic	Load break disconnect at the push of the button Accepts Ø6 mm padlock with cover closed Terminals accept 1.5 mm ² to 4 mm ² rigid cable (BS EN 60309-1 and IEC 60309-1) Possibility to fit 2 auxiliary C/O contacts Cat. No. 0521 96
1			 100/130 V~
			 200/250 V~
1			2 P + ⊥
1			3 P + ⊥
1			3 P + N + ⊥
			 380/415 V~
1	0522 13	0522 03	3 P + ⊥
1	0522 14	0522 04	3 P + N + ⊥

Surface mounting boxes

Enable Hypra Prisinter panel mounting sockets to be surface mounted
 Reversible entry box with 3 x M20 entries with 2 blanking plugs plus rear knockout entries

	Metal	Plastic	
1	0520 59	0520 49	For 2 P + ⊥ / 3 P + ⊥ sockets
1	0529 59	0522 49	For 3 P + N + ⊥ sockets

For IP 44 straight plugs

see p. 174

For IP 66/67-55 angled and straight plugs

see p. 180