10.03.2014

16:48:03h

S SCHMERSAL

Datasheet - BNS-B20-12zG-ST-R

Safety sensors / BNS-B20

X Preferred typ



(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description Article number EAN code BNS-B20-12ZG-ST-R 101177734 4030661309194

thermoplastic enclosureNon-contact safety switch

Modern and symmetric design

Simple mounting with 4 Screws
Connector M12 x 1, 8-pole

• Suitable for hinged and sliding guards

Ergonomic operation

• No protruding actuator

required

Does not protrude into the door opening
119,5 mm x 140 mm x 43,3 mm

· Substitutes door-handle and safety switch, no further door fittings

Tamper-proof because of integral coded safety sensor

Approval

Approval



Classification

Standards

B10d Opener/Normally open contact (NC/NO) - notice Mission time notice EN ISO 13849-1 25.000.000 at max. 20% contact load 20 Years $MTTF_{d} = \frac{B_{100}}{0.1 \times n_{op}}$

 $n_{op} = \frac{d_{op} \times h_{op} \times 3600 \text{ s/h}}{t_{oycle}}$

Global Properties

Standards	IEC 60947-5-3, BG-GS-ET-14
Compliance with the Directives (Y/N) ${\sf C}{f \epsilon}$	Yes
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic
Weight	115 g
Coding available (Y/N)	Yes
Monitoring function of downstream devices (Y/N)	No
Prerequisite evaluation unit	
Recommended safety-monitoring module	
Recommended actuator	BNS-B20-B01

Mechanical data

Design of electrical connection	Connector M12
AWG-Number	
mechanical installation conditions	quasi-flush
Ensured switch distance ON	0 mm
Ensured switch distance OFF	22 mm
Type of actuation	Magnet
restistance to shock	30 g / 11 ms
Resistance to vibration	10 55 Hz, Amplitude 1 mm
Latching force	100 N
Door hinge	right
Max. door weight	
- sliding guard	3 kg
- hinged guard	5 kg

Ambient conditions

С
С
С
С

Electrical data

Integrated Safety monitoring module available (Y/N)	No
Cross circuit/short circuit recognition possible (Y/N)	Yes
Voltage type	VDC
Switch frequency	max. 5 Hz
Switching voltage	max. 24 VDC
Switching current	max. 10 mA
Switching capacity	max. 240 mW

Outputs

Design of control output		
Number of shutters	1 piece	
Number of openers	2 piece	
Design of output signal switching device		

Electrical data - Safety outputs

Number of secure semi-conductor outputs	0 piece
Number of secure outputs with contact	2 piece
Electrical data - Diagnostic output	
Number of semi-conductor outputs with signaling function	0 piece
Number of outputs with signaling function that already have a contact	1 piece
LED switching conditions display	
LED switching conditions display (Y/N)	Yes
- The LED is illuminated when the guard is closed.	
ATEX	
Explosion protection categories for gases	None
Explosion protected category for dusts	None
Dimensions	
Dimensions of the sensor	
- Width of sensor	119.5 mm
- Height of sensor	140 mm
- Length of sensor	43.3 mm

notice

Contact symbols shown for the closed condition of the guard device.

The contact configuration for versions with or without LED is identical.


Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

Contact S21-S22 must be integrated in the safety circuit

Included in delivery

Actuators must be ordered separately.

Diagram

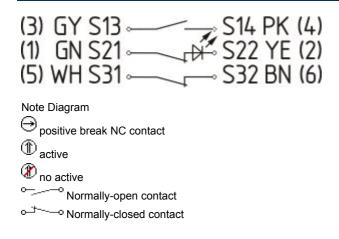

Ordering code

BNS-B20-(1)Z(2)-(3)-(4)

(1)	
12	1 Normally open contact (NO) / 2 Opener (NC)
11	1 Normally open contact (NO) / 1 Opener (NC)
02	2 Opener (NC)
(2)	
without	without LED switching conditions display
G	with LED switching conditions display
(3)	
without	with Pre-wired cable bottom
н	with Pre-wired cable rear
ST	with Connector M12 bottom
(4)	
L	Door hinge on left-hand side (Only for Pre-wired cable bottom or Plug-in connection)
R	Door hinge on right-hand side (Only for Pre-wired cable bottom or Plug-in connection)

Documents

Operating instructions and Declaration of conformity (pt) 535 kB, 06.07.2012 Code: mrl_bns-b20_pt

Operating instructions and Declaration of conformity (es) 513 kB, 11.08.2011 Code: mrl_bns-b20_es

Operating instructions and Declaration of conformity (it) 496 kB, 13.09.2011 Code: mrl_bns-b20_it

Operating instructions and Declaration of conformity (en) 659 kB, 16.08.2011 Code: mrl_bns-b20_en

Operating instructions and Declaration of conformity (pl) 497 kB, 30.07.2013 Code: mrl_bns-b20_pl

Operating instructions and Declaration of conformity (de) 576 kB, 16.08.2011 Code: mrl_bns-b20_de

Operating instructions and Declaration of conformity (jp) 663 kB, 10.11.2011 Code: mrl_bns-b20_jp

Operating instructions and Declaration of conformity (fr) 497 kB, 13.09.2011 Code: mrl_bns-b20_fr

Operating instructions and Declaration of conformity (nl) 520 kB, 19.08.2011 Code: mrl_bns-b20_nl

Operating instructions and Declaration of conformity (da) 513 kB, 23.08.2012 Code: mrl_bns-b20_da

BG-test certificate (en) 643 kB, 27.02.2007 Code: z_bnbp02 BG-test certificate (de) 648 kB, 27.02.2007 Code: z_bnbp01

Brochure (fr) 337 kB, 08.10.2004 Code: b_b20p03

Brochure (en) 290 kB, 07.10.2004 Code: b_b20p02

Brochure (de) 296 kB, 07.10.2004 Code: b_b20p01


Brochure (it) 297 kB, 07.10.2004 Code: b_b20p05

notice (de, en) 60 kB, 21.03.2006 Code: s_b20p01


Images




Product photo

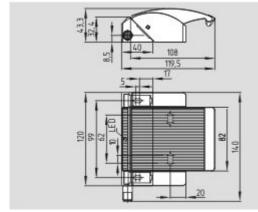

Dimensional drawing (basic component)



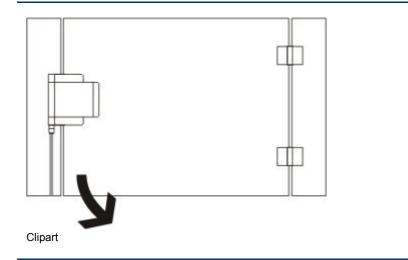

System components

Actuator



101177737 - BNS-B20-B01

Connector



A-K8M12

- Pre-wired cable
- 8-pole

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal The data and values have been checked throroughly. Technical modifications and errors excepted. Generiert am 10.03.2014 - 16:48:04h Kasbase 2.2.18.F DBI

