

## Datasheet - AES 1337



Guard door monitors and Safety control modules for Emergency Stop applications / Micro Processor based safety controllers (Series AES) / AES 1337

Preferred typ



- Monitoring of BNS range magnetic safety sensors
- 3 safety contacts, STOP 0
- 1 Signalling output

(Minor differences between the printed image and the original product may exist!)

### Ordering details

Product type description	AES 1337
Article number	101172215
EAN code	4030661300429

### Approval

Approval



### Classification

Standards	EN ISO 13849-1, IEC 61508, EN 60947-5-1
PL	up e
Control category	up 4
DC	99%
CCF	> 65 points
PFH value	$\leq 2, 0.0 \times 10^{-8}/h$
SIL	up 3
Mission time notice	20 Years
	The PFH value is applicable for the combinations listed in the table for contact load (K) (current through enabling paths) and switching cycle number (n-op/y). In case of 365 operating days per year and a 24-hour operation, this


results in the specified switching cycle times (t-cycle) for the relay contacts.

Diverging applications on request.

K	n-ops	t-cycle
20 %	525.800	1,0 min
40 %	210.240	2,5 min
60 %	75.067	7,0 min
80 %	30.918	17,0 min
100 %	12.223	43,0 min

## Global Properties

---

Product name	AES 1337
Standards	IEC/EN 60204-1, IEC 60947-5-3, EN ISO 13849-1, IEC 61508, BG-GS-ET-14
Compliance with the Directives (Y/N) 	Yes
Climatic stress	EN 60068-2-78
Mounting	snaps onto standard DIN rail to EN 60715
Terminal designations	IEC/EN 60947-1
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic, ventilated
- Material of the contacts	, self-cleaning, positive action
Weight	255 g
Start conditions	Automatic or Start button (Optional monitored)
Start input (Y/N)	Yes
Feedback circuit (Y/N)	Yes
Start-up test (Y/N)	No
Automatic reset function (Y/N)	Yes
Reset with edge detection (Y/N)	Yes
Pull-in delay	
- ON delay with automatic start	170 ms
- ON delay with reset button	25 ms
Drop-out delay	
- Drop-out delay in case of emergency stop	15 ms / max. 23 ms

## Mechanical data

---

Connection type	Screw connection
Cable section	
- Min. Cable section	0,25 mm <sup>2</sup>
- Max. Cable section	2.5 mm <sup>2</sup>
Pre-wired cable	rigid or flexible
Tightening torque for the terminals	0,6 Nm
Detachable terminals (Y/N)	No
Mechanical life	10.000.000 operations
Electrical lifetime	Derating curve available on request
restistance to shock	10 g / 11 ms
Resistance to vibration To EN 60068-2-6	10...55 Hz, Amplitude 0,35 mm

## Ambient conditions

---

Ambient temperature	
- Min. environmental temperature	-25 °C
- Max. environmental temperature	+45 °C
Storage and transport temperature	
- Min. Storage and transport temperature	-40 °C
- Max. Storage and transport temperature	+85 °C

Protection class	
- Protection class-Enclosure	IP40
- Protection class-Terminals	IP20
- Protection class-Clearance	IP54
Air clearances and creepage distances To IEC/EN 60664-1	
Degree of pollution	2

## Electromagnetic compatibility (EMC)

---

EMC rating	conforming to EMC Directive
------------	-----------------------------

## Electrical data

---

Rated DC voltage for controls	
- Min. rated DC voltage for controls	20.4 V
- Max. rated DC voltage for controls	28.8 V
Rated AC voltage for controls, 50 Hz	
- Min. rated AC voltage for controls, 50 Hz	20.4 V
- Max. rated AC voltage for controls, 50 Hz	26.4 V
Rated AC voltage for controls, 60 Hz	
- Min. rated AC voltage for controls, 60 Hz	20.4 V
- Max. rated AC voltage for controls, 60 Hz	26.4 V
Contact resistance	max. 100 mΩ
Power consumption	max. 2.1 W / 3.5 VA
Type of actuation	AC/DC
Switch frequency	max. 3 Hz
Rated insulation voltage $U_i$	250 V
Rated operating voltage $U_e$	24 VDC -10% / +20%, residual ripple max. 10% 24 VAC -15% / +10%
Thermal test current $I_{the}$	6 A
Operating current $I_e$	0,08 A
Frequency range	50 / 60 Hz
Electronic protection (Y/N)	Yes
Fuse rating for the operating voltage	Internal electronic trip, tripping current > 0,5 A, Reset after approximately 1 second/s
Bridging in case of voltage drops	15 ms

## Inputs

---

### Monitored inputs

- Short-circuit recognition (Y/N)	Yes
- Wire breakage detection (Y/N)	Yes
- Earth connection detection (Y/N)	Yes
Number of shutters	1 piece
Number of openers	1 piece
Cable length	1500 m with 1.5 mm <sup>2</sup> ; 2500 m with 2.5 mm <sup>2</sup> (for Rated voltage)
Conduction resistance	max. 40 Ω

## Outputs

---

Stop category	0
Number of safety contacts	3 piece
Number of auxiliary contacts	1 piece
Number of signalling outputs	0 piece

Switching capacity	
- Switching capacity of the safety contacts	max. 250 V, 6 A ohmic (inductive in case of appropriate protective wiring) min. 10 V / 10 mA
- Switching capacity of the auxiliary contacts	24 VDC, 100 mA
Fuse rating	
- Protection of the safety contacts	Safety fuse 8 A quick-blow, 6 A slow blow
- Fuse rating for the auxiliary contacts	Safety fuse 2.5 A quick-blow, 2 A slow blow
Signalling output	Y 1: Guard system on, safety contacts on
Utilisation category To EN 60947-5-1	AC-15: 230 V / 6 A DC-13: 24 V / 6 A
Number of undelayed semi-conductor outputs with signaling function	0 piece
Number of undelayed outputs with signaling function (with contact)	1 piece
Number of delayed semi-conductor outputs with signaling function.	0 piece
Number of delayed outputs with signalling function (with contact).	0 piece
Number of secure undelayed semi-conductor outputs with signaling function	0 piece
Number of secure, undelayed outputs with signaling function, with contact.	3 piece
Number of secure, delayed semi-conductor outputs with signaling function	0 piece
Number of secure, delayed outputs with signaling function (with contact).	0 piece

## LED switching conditions display

---

LED switching conditions display (Y/N)	Yes
Number of LED's	4 piece
LED switching conditions display	
- The integrated LEDs indicate the following operating states.	
- Position relay K1	
- Position relay K2	
- Supply voltage $U_B$	
- Internal operating voltage $U_i$	

## Miscellaneous data

---

Applications	 Guard system  Safety sensor
--------------	---

## Dimensions

---

Dimensions	
- Width	22.5 mm
- Height	100 mm
- Depth	121 mm

## notice

---

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

## notice - Wiring example

---

To secure a guard door up to PL 4 and Category #03#

Monitoring 1 guard door(s), each with a magnetic safety sensor of the BNS range

Start button (S) with edge detection

The feedback circuit monitors the position of the contactors K3 and K4.

**Automatic start:** The automatic start is programmed by connecting the feedback circuit to the terminals X1/X3. If the feedback circuit is not required, establish a bridge

The wiring diagram is shown with guard doors closed and in de-energised condition.

## Documents

---

**Operating instructions and Declaration of conformity (de)** 310 kB, 28.01.2014

Code: mrl\_aes1337\_de

**Operating instructions and Declaration of conformity (nl)** 305 kB, 13.02.2014

Code: mrl\_aes1337\_nl

**Operating instructions and Declaration of conformity (jp)** 595 kB, 10.02.2014

Code: mrl\_aes1337\_jp

**Operating instructions and Declaration of conformity (es)** 306 kB, 13.02.2014

Code: mrl\_aes1337\_es

**Operating instructions and Declaration of conformity (da)** 192 kB, 09.07.2013

Code: mrl\_aes1337\_da

**Operating instructions and Declaration of conformity (it)** 296 kB, 10.02.2014

Code: mrl\_aes1337\_it

**Operating instructions and Declaration of conformity (pl)** 186 kB, 28.08.2013

Code: mrl\_aes1337\_pl

**Operating instructions and Declaration of conformity (en)** 302 kB, 06.02.2014

Code: mrl\_aes1337\_en

**Operating instructions and Declaration of conformity (fr)** 446 kB, 28.06.2011

Code: mrl\_aes1337\_fr

**Wiring example (99)** 431 kB, 12.12.2013

Code: kaes1139

**BG-test certificate (de)** 581 kB, 05.01.2011

Code: z\_aesp01

**BG-test certificate (en)** 576 kB, 05.01.2011

Code: z\_aesp02

**CCC certification (cn)** 284 kB, 03.05.2011


Code: q\_srbp06

**CCC certification (en)** 297 kB, 03.05.2011

Code: q\_srbp05

## Images

---

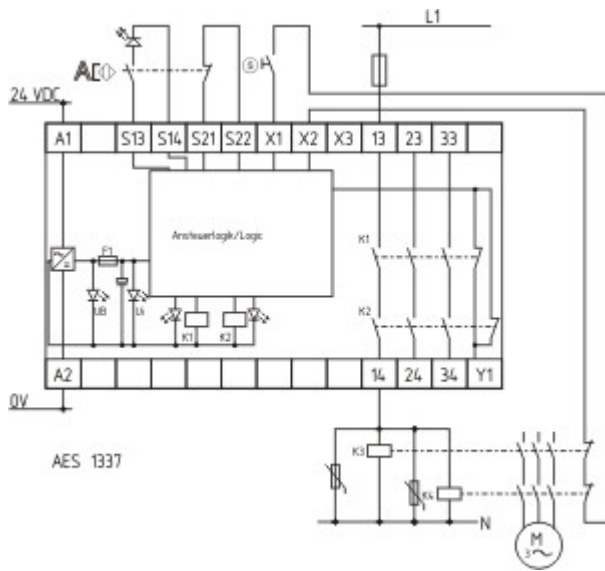

Wiring example

K.A. Schmersal GmbH & Co. KG, Mödinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 11.03.2014 - 10:22:12h Kasbase 2.2.18.F DBI

