

Technical data sheet - LÜTZE SUPERFLEX® TRONIC (C) PUR UL

Shielded electronic cable UL/CSA recognized

For highest requirements



PVC electronic cables · C-track compatible · Shielded

Identification	Type	(12×0.25)
	Part-No.	117105

Use/Area of application

Application

- Robots, drag chains as well as everywhere where signals are transmitted to continuously moving system or machine parts
- Machine and device construction, transport and conveyor technology, heating, climate technology
- In dry and moist rooms
- As monitoring, measurement and control cable for continuous flexing applications
- Especially for industrial environments with high EMI potential in machine, plant and device construction

13.11.2013 – Subject to technical modification

Part-No. 117105

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet - LÜTZE SUPERFLEX[®] TRONIC (C) PUR UL

Shielded electronic cable UL/CSA recognized

For highest requirements

Properties	<ul style="list-style-type: none"> • High active and passive interference resistance (EMC) • Braided shield optimised for continuous flexing applications • Low capacitance, very good electrical properties • Flame-retardant, self-extinguishing • Halogen-free, no corrosive gases • Very good flexing strength • Low adhesion, Abrasion-resistant, Tear resistant • Hydrolysis-resistant, microbe-resistant, and rot-resistant • Good resistance to wear and salt water • Excellent coolant and lubricant resistance • Largely resistant to oils, greases, alcohol-free benzines and kerosene • Silicone free • RoHS-compliant
------------	---

Technical data

UL approval	AWM 20549	
Nominal voltage	300 V 80 °C	
Test voltage	3000 V	
Insulation resistance	min. 100 MΩ × km	
Temperature range	moving	-25 °C to +80 °C
	fixed	-40 °C to +80 °C
Minimum bending radius	moving	D × 12
	fixed	D × 6
Jacket material	PUR	
Fire performance	Flame-retardant according to VDE 0482 part 265-2 DIN EN 50265-2; IEC 60332-1; UL 1581 section VW-1Flame-test	
Halogen-free	according to EN 50267-2-1	
Outer-∅	7.2 approx. mm	
Outer ∅	0.283 ca. mm / in	
Weight	7.1 kg/100 m	
Weight	48.0 Lbs/Mft	
Cu-Index	4.7 kg/100 m	
	32 Lbs/Mft	

Design

Number of strands/cross-section	(12×0.25)
Conductor structure	Bare copper wire, finest multi-strand according to DIN VDE 0295 class 6, IEC 60228 class 6
Conductor insulation	Special TPE conductor insulation, UL Certified

13.11.2013 – Subject to technical modification

Part-No. 117105

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

Technical data sheet - LÜTZE SUPERFLEX® TRONIC (C) PUR UL

Shielded electronic cable UL/CSA recognized


For highest requirements

Conductor labelling	Conductors colour-coded according to DIN 47100
Stranding	Conductors twisted without mechanical stress, layer pitch optimised
Banding	Non-woven material over stranded cable
Overall shield	Meshwork from tinned copper wire braid, optical covering $\geq 85\%$
Outer jacket	Full polyurethane jacket, matt, adhesion-free surface
Jacket colour	grey RAL 7001

General

Note CE These products are in conformity with the EU Low Voltage Directive 2006/95/EC

Logo

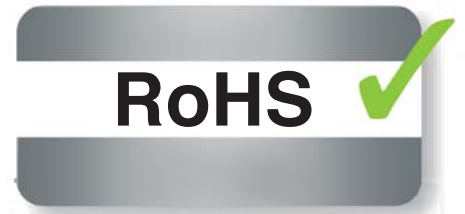

13.11.2013 – Subject to technical modification

Part-No. 117105

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
 www.lutze.com • info@lutze.com

United Kingdom: LÜTZE Ltd.

Unit 3, Sandy Hill Park
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2
 www.lutze.com • sales.gb@lutze.co.uk