

Technical Data	
Number of I/O modules	64
Fieldbus	
Max. input process image	512 bytes
Max. output process image	512 bytes
Configuration	via PC or PLC
DeviceNet features	Polled I/O message connection
	Strobed I/O message connection
	Change of state
	Cyclic message connection
	Group 2 only, slave
Power supply	24 V DC (-25 % +30 %)
Current consumption	
via power supply terminal	< 500 mA / 24 V
via DeviceNet interface	< 120 mA / 11 V
Efficiency of the power supply	87 %
Internal current consumption (5 V)	350 mA
Total current for I/O modules (5 V)	1650 mA
Isolation	500 V system/supply
Voltage via power jumper contacts	24 V DC (-25 % +30 %)
Current via power jumper contacts (max.)	10 A DC


General Specifications	
Operating temperature	0 °C +55 °C
Wire connection	CAGE CLAMP®
Cross sections	0.08 mm <sup>2</sup> 2.5 mm <sup>2</sup> / AWG 28 14
Stripped lengths	8 9 mm / 0.33 in
Dimensions (mm) W x H x L	51 x 65 x 100
	Height from upper-edge of DIN 35 rail
Weight	202 g
Storage temperature	-25 °C +85 °C
Relative air humidity (no condensation)	95 %
Vibration resistance	acc. to IEC 60068-2-6
Shock resistance	acc. to IEC 60068-2-27
Degree of protection	IP20
EMC: C € - immunity to interference	acc. to EN 61000-6-2 (2005)
EMC: C € - emission of interference	acc. to EN 61000-6-4 (2007)
EMC: marine applications	
- immunity to interference	acc. to Germanischer Lloyd (2003)
EMC: marine applications	
- emission of interference	acc. to Germanischer Lloyd (2003)



## **DeviceNet Fieldbus Coupler**

125 ... 500 Kbaud; digital and analog signals



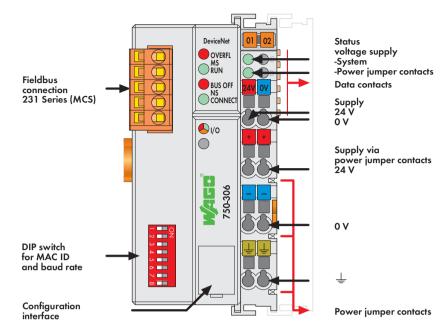

This buscoupler connects the WAGO-I/O-SYSTEM as a slave to the Device  $\mathbf{Net}^{\mathsf{TM}}$  fieldbus.

The buscoupler automatically configures, creating a local process image which may include analog, digital or specialty modules. Analog and specialty module data is sent via words and/or bytes, digital data is sent bit by bit.

 $\mathsf{Device} \mathbf{Net}^{\mathsf{TM}} \text{ stores the process image in the corresponding Master control}$ (PLC, PC or NC).

Item No.

Pack.

Notice: EDS files required

Description

The local process image is divided into two data zones containing the data received and the data to be sent. The process data can be sent via the Device **Net**<sup>TM</sup> fieldbus to the PLC, PC or NC for further processing, and received from the field via Device **Net**<sup>TM</sup>.

The data of the analog modules is stored in the process image which is created automatically according to the order in which the modules are connected to the buscoupler. The bits of the digital modules are sent byte by byte and added to the analog data. If the amount of digital information exceeds 8 bits, the buscoupler automatically starts with a new byte.

DeviceNet, w/s	•	750-306	1
DeviceNet (only	function with digital	l	
modules)		750-306/000-005	1
DeviceNet (with	out buskoppler statu	JS	
byte)		750-306/000-006	1
Accessories		Item No.	Pack. Unit
EDS files	Download: www.wago.com		
Miniature WSB	Quick marking syste	m	
(	plain	248-501	5
Section 1991	with marking	see pages 352 353	
water bulleting			
Approvals		Also see "Approvals Overview	" in Section
		ODVA	
Certification			
Certification Conformity markin	ıg	C€	
Conformity markin	ng ions upon request)	C € ABS, BV, DNV, GL, KR, LR, NK	K, PRS, RIN
Conformity markin	•	• • • • • • • • • • • • • • • • • • • •	K, PRS, RIN
Conformity marking Shipbuilding (version	ions upon request)	• • • • • • • • • • • • • • • • • • • •	
Conformity marking Shipbuilding (versions UL 508	ions upon request)	ABS, BV, DNV, GL, KR, LR, NK	

System Data	
No. of couplers connected to Master	64 with scanner
Max. no. of I/O points	approx. 6000 (depends on master)
Transmission medium	Shielded Cu cable Trunk line:
	$2 \times 0.82 \text{ mm}^2 + 2 \times 1.7 \text{ mm}^2$
	Drop line: 2 x 0.2 mm <sup>2</sup> + 2 x 0.32 mm <sup>2</sup>
Max. length of bus line	100 m 500 m (depends on baud rate/
	cable)
Baud rate	125 Kbaud, 250 Kbaud, 500 Kbaud
Buscoupler connection	5-pole male connector, 231 Series (MCS)
	female connector 231-305/010-000/
	050-000 (included)