## XS618B1DAM12

inductive sensor XS6 M18 - L74mm - brass - Sn8mm - 12..48VDC - M12





### Main

Range of product	OsiSense XS
Series name	General purpose
Sensor type	Inductive proximity sensor
Sensor name	XS6
Sensor design	Cylindrical M18
Size	74 mm
Body type	Fixed
Detector flush mounting acceptance	Flush mountable
Material	Metal
Type of output signal	Discrete
Wiring technique	2-wire
Discrete output function	1 NO
Output circuit type	DC
Electrical connection	Male connector M12, 4 pins
[Us] rated supply voltage	1248 V DC with reverse polarity protection
Switching capacity in mA	<= 100 mA DC with overload and short-circuit protection
IP degree of protection	IP67 conforming to IEC 60529 IP69K conforming to DIN 40050

#### Complementary

Complementary		
Thread type	M18 x 1	
Detection face	Frontal	
Front material	PPS	
Enclosure material	Nickel plated brass	
Sensing range	> 48 mm	
Differential travel	115% of Sr	
Status LED	Output state: 1 LED (yellow)	
Supply circuit type	1058 V DC	
Switching frequency	<= 2000 Hz DC	
Maximum voltage drop	<4 V (closed)	
Maximum delay first up	10 ms	
Maximum delay response	0.3 ms	
Maximum delay recovery	0.3 ms	
Marking	CE	

#### Environment

Product certifications	UL CSA
Vibration resistance	25 gn amplitude = +/- 2 mm (f = 1055 Hz) conforming to IEC 60068-2-6
Shock resistance	50 gn for 11 ms conforming to IEC 60068-2-27

#### **Packing Units**

Unit Type of Package 1	PCE	

### Offer Sustainability


Green Premium product
Pro-active compliance (Product out of EU RoHS legal scope)
Yes
₫Yes
Product Environmental Profile
End Of Life Information

#### Contractual warranty

Warranty	18 months	

# XS618B1DAM12


### **Dimensions**

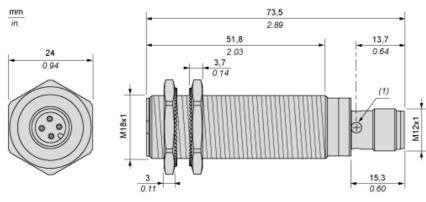

# XS618B1DAM12

### Minimum Mounting Distances


#### Side by side



e (1) 16 mm/0.63 in.

≥


Face to face



e (2) 100 mm/3.94 in.

≥

Facing a metal object



e (3) 25 mm/0.98 in

≥

## Product data sheet Connections and Schema

# XS618B1DAM12

### Wiring Schemes

### 2-Wire Non-polarised

M12 connector



NO output

