



Door coupl.handle to EN60205

Part no. PKZ0-XH

Article no. 106132



Powering Business Worldwide™

Can be used with PKZM0 and PKZM4

Program

			For use as main switch to IEC/EN 60204
Colour			Black
For use with			PKZM0 PKZM4
Notes			
Plug-in extension shaft PKZ0-XAH can be cut to desired length for mounting depths of 100 – 240 mm.			
Carrier with extension shaft included in delivery.			
With ON/OFF switch position and "+" (tripped), lockable			
With 3 padlocks, 4 – 8 mm hasp.			
Cannot be used in combination with VHI20-PKZ0.			

Approbationen

UL approval	Yes
CSA approval	Yes
Product Standards	UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking
UL File No.	E36332
UL CCN	NLRV
CSA File No.	12528
CSA Class No.	3211-05
NA Certification	UL listed, CSA certified
Specially designed for NA	No
Degree of Protection	IEC: IP65, UL/CSA Type: 4X, 12




Technical data according to ETIM 4.0

Suitable for switch-disconnector			No
Suitable for circuit-breakers			No
With shaft			YES
Suitable for emergency switching off			No
Lockable			YES
Color			black

CAD-Data

Product standards CAD data: <http://eaton-moeller.partcommunity.com>

Dimensions

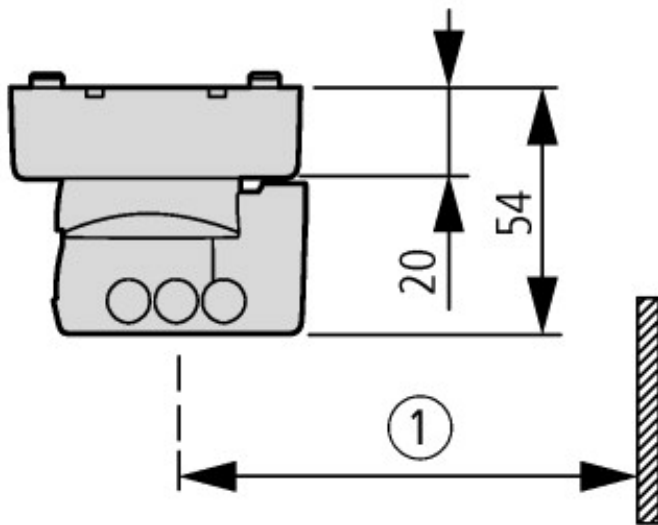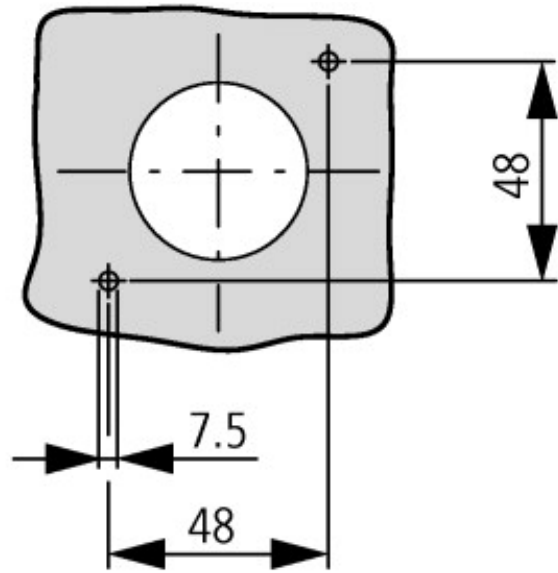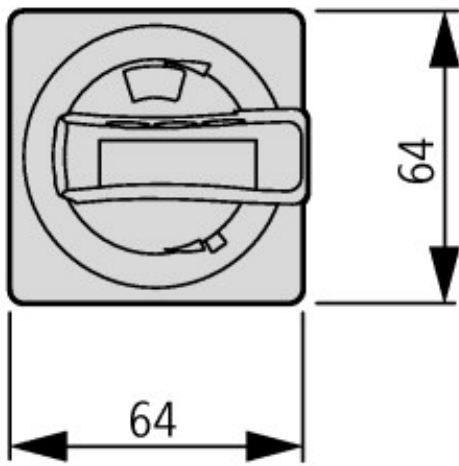

Mounting depth: 100 to 240 mm from the top edge of the top-hat rail to the front edge of the cabinet door/cover
 Distance between circuit breaker axis/cover hinge: at least 100 mm

 At least 100 mm from cover hinge

Additional product information (links)

IL03402018Z (AWA1210-2348) Door coupling rotary handle	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402018Z2011_05.pdf
Motor starters and "Special Purpose Ratings" for the North American market	http://www.moeller.net/binary/ver_techpapers/ver953en.pdf
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf