

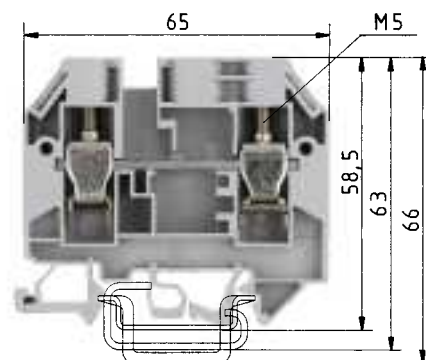


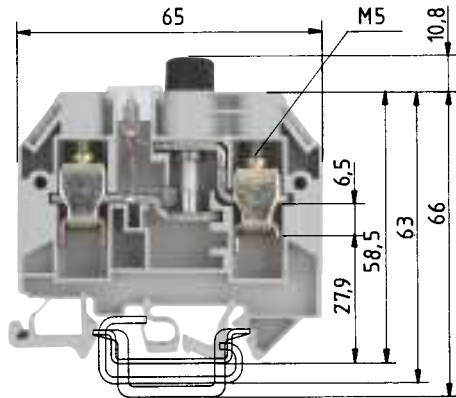

Type	Overload protection		Exclusive short-circuit protection	
	Single arrangement	Group arrangement	Single arrangement	Group arrangement
WK 10 Si U 5x20	4.0W/6.3A	2.5W/6.3A	4.0W/6.3A	4.0W/6.3A
WK 10 Si U 6.3x32	4.0W/10A	2.5W/2.5A	4.0W/10A	2.5W/2.5A
WK 10 Si U 5x25	4.0W/6.3A	2.5W/6.3A	4.0W/6.3A	4.0W/6.3A
WK 10 Si U 5x30	4.0W/6.3A	2.5W/6.3A	4.0W/6.3A	4.0W/6.3A

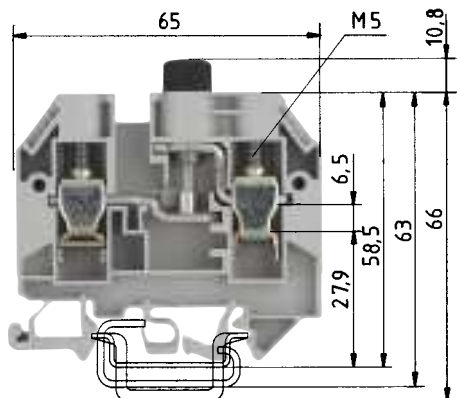

\*) Voltage and current are determined by the built-in LED and the inserted G-fuse.

\*) Voltage and current are determined by the built-in indicator and the inserted G-fuse.

**WK 10/SI ... /U**

fine-stranded	solid/stranded	V	A
1.0-10mm <sup>2</sup>	1.0-16mm <sup>2</sup>	500V/6kV/3*)	10*)
No. 22-6 AWG		600V*)	15
No. 16-6 AWG		600V*)	max. 15
12mm			13mm

**WK 10/SI ... /U mit Kennmelder**

fine-stranded	solid/stranded	V	A
1.0-10mm <sup>2</sup>	1.0-16mm <sup>2</sup>	500V/6kV/3*)max.10*)	
No. 22-6 AWG		600V*)	15
No. 16-6 AWG		600V*)	max. 15
12mm			13mm

**WK 10/SI U D**

fine-stranded	solid/stranded	V	A
1.0-10mm <sup>2</sup>	1.0-16mm <sup>2</sup>	500V/6kV/3	57
No. 22-6 AWG		600 V	50
No. 16-6 AWG		600 V	65
12mm			13mm

Type	Part No.	Std. Pack	Type	Part No.	Std. Pack	Type	Part No.	Std. Pack
WK 10/Si U 5 x 20	57.910.5055.0	50	WK 10/Si U 5 x 20M, NGL	57.910.5455.0	50	WK 10/Si U D	57.910.4955.0	50
WK 10/Si U 5 x 25	57.910.5155.0	50	WK 10/Si U 5 x 20M, GLB	57.910.5855.0	50			
WK 10/Si U 5 x 30	57.910.5255.0	50	WK 10/Si U 6,3 x 32M, NGL	57.910.5755.0	50			
WK 10/Si U 6,3 x 32	57.910.5355.0	50	WK 10/Si U 6,3 x 32M, GLB	57.910.6155.0	50			
35 x 27 x 7,5 EN 60715	98.300.0000.0	1	35 x 27 x 7,5 EN 60715	98.300.0000.0	1	35 x 27 x 7,5 EN 60715	98.300.0000.0	1
35 x 27 x 15 EN 60715	98.370.0000.0	1	35 x 27 x 15 EN 60715	98.370.0000.0	1	35 x 27 x 15 EN 60715	98.370.0000.0	1
9006 EN 60715 G-32	98.190.0000.0	1	9006 EN 60715 G-32	98.190.0000.0	1	9006 EN 60715 G-32	98.190.0000.0	1
WE 1/U	Z5.523.5753.0	100	WE 1/U	Z5.523.5753.0	100	WE 1/U	Z5.523.5753.0	100
9708/2 S 35	Z5.522.8553.0	100	9708/2 S 35	Z5.522.8553.0	100	9708/2 S 35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
AP 10/Si	07.311.4155.0	10	AP 10/Si	07.311.4155.0	10	AP 10/Si	07.311.4155.0	10
VB WK 10/Si-2	Z7.287.0227.0	10	VB WK 10/Si-2	Z7.287.0227.0	10	VB WK 10/Si-2	Z7.287.0227.0	10
VB WK 10/Si-3	Z7.287.0327.0	10	VB WK 10/Si-3	Z7.287.0327.0	10	VB WK 10/Si-3	Z7.287.0327.0	10
VB WK 10/Si-6	Z7.287.0627.0	10	VB WK 10/Si-6	Z7.287.0627.0	10	VB WK 10/Si-6	Z7.287.0627.0	10
	04.312.2056.0	100		04.312.2056.0	100		04.312.2056.0	100
*)	VDE	CSA	UL	*)	VDE	CSA	UL	
<b>57.910.5055.0</b>	250V~	600V	600V	<b>57.910.5455.0</b>	110 - 250V~	500V	150V	
				Indicator red	Current consumed 0.16 - 0.8mA			
<b>57.910.5155.0</b>	250V~	600V	600V	<b>57.910.5855.0</b>	28V~	28V	28V	
				Indicator yellow	Current consumed 24mA			
<b>57.910.5255.0</b>	500V~	600V	600V	<b>57.910.5755.0</b>	110 - 500V~	500V	150V	
				Indicator red	Current consumed 0.16 - 0.8mA			
<b>57.910.5355.0</b>	500V~	600V	600V	<b>57.910.6155.0</b>	28V~	28V	28V	
				Indicator yellow	Current consumed 24mA			