

Sealing frame - CES-B16-HFFS-PLBK - 0801662

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sealing frame with locking latch, size B16, with flat gasket, for 8 small sleeves

Key commercial data

package_quantity	1
GTIN	4046356674102

Technical data

Dimensions

Length	120 mm
Width	58.5 mm
Height	20 mm

Ambient conditions

Degree of protection	IP54
Ambient temperature (operation)	-40 °C ... 120 °C

General

Frame type	Sealing frame
Material	PA
Inflammability class according to UL 94	V0
Color	black
Installation instructions	One large sleeve requires the space of 4 small sleeves, M4 mounting screws
Installation instructions	Leak-tightness is guaranteed with underwall and perpendicular mounting; the CES-B24-WRG-BK flat gasket (supplied as standard) should be inserted between the wall and the sealing frame in the case of wall mounting.

classifications

eCl@ss

eCl@ss 4.0	23110102
eCl@ss 4.1	23110102
eCl@ss 5.0	23110102
eCl@ss 5.1	23110102

Sealing frame - CES-B16-HFFS-PLBK - 0801662

classifications

eCl@ss

eCl@ss 6.0	23110102
eCl@ss 7.0	23110102
eCl@ss 8.0	23110102

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002498
ETIM 5.0	EC002498



UNSPSC

UNSPSC 6.01	27113201
UNSPSC 7.0901	27113201
UNSPSC 11	27113201
UNSPSC 12.01	27113201
UNSPSC 13.2	27113201

approvals

UL Recognized / cUL Recognized / cULus Recognized /

Approval details



accessories

Seal

CES-B16-WRG-BK - 0801726




Sealing frame - CES-B16-HFFS-PLBK - 0801662

accessories

Drawings


Dimensioned drawing

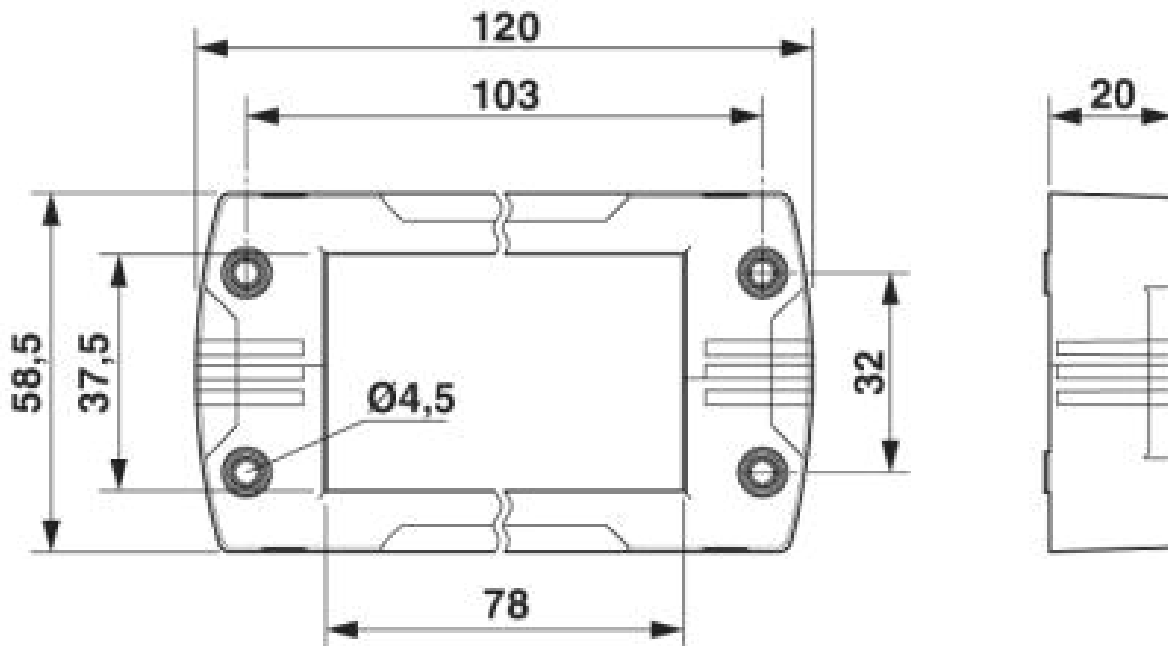

Dimensional drawing

Sealing frame - CES-B16-HFFS-PLBK - 0801662

Dimensioned drawing

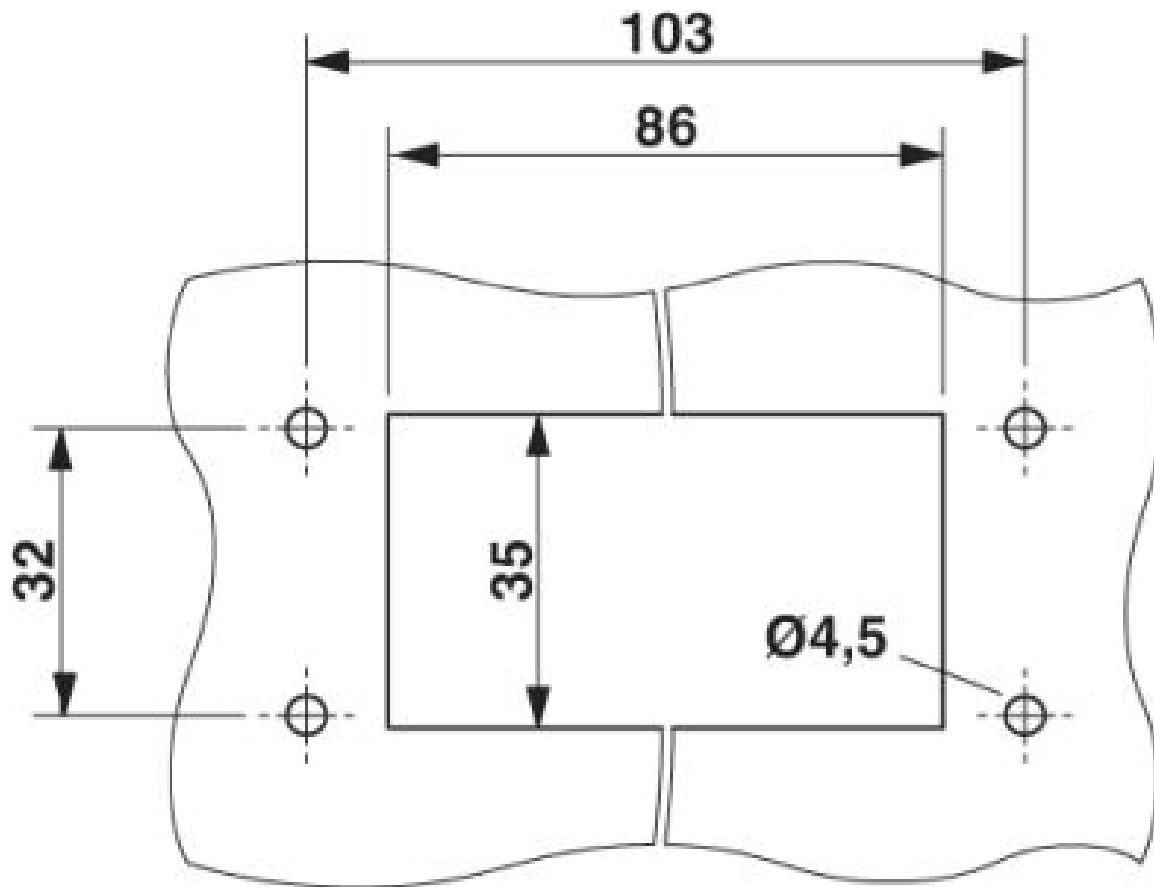

Panel cutout

© Phoenix Contact 2014 - all rights reserved
<http://www.phoenixcontact.com>