

# Sensor/Actuator cable - SAC-3P-M12MS/6,0-PUR/M12FS - 1533547

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/Actuator cable, 3-position, PUR halogen-free, black-gray RAL 7021, Plug straight M12, A-coded, on Socket straight M12, A-coded, Cable length: 6 m

## Key commercial data

package_quantity	1
GTIN	4017918992088

## Technical data

### Dimensions

Length of cable	6 m
-----------------	-----

### Ambient conditions

Degree of protection	IP65
Degree of protection	IP67
Degree of protection	IP68

### General

Rated current at 40°C	4 A
Rated voltage	250 V
Number of positions	3
Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Coding	A - standard
Status display	No
Surge voltage category	II
Pollution degree	3
Insertion/withdrawal cycles	≥ 100

### Material

Inflammability class according to UL 94	HB
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing

# Sensor/Actuator cable - SAC-3P-M12MS/6,0-PUR/ M12FS - 1533547

## Technical data

### Material

<b>Material, knurls</b>	Zinc die-cast, nickel-plated
<b>Sealing material</b>	NBR

### Cable

<b>Cable type</b>	PUR halogen-free black
<b>Cable type (abbreviation)</b>	PUR
<b>Cable abbreviation</b>	Li9Y11Y
<b>UL AWM style</b>	20549
<b>Conductor cross section</b>	3x 0.34 mm <sup>2</sup> (signal line)
<b>AWG signal line</b>	22
<b>Conductor structure signal line</b>	42x 0.10 mm
<b>Core diameter including insulation</b>	1.27 mm ±0.02 mm (signal line)
<b>Thickness, insulation</b>	≥ 0.21 mm (Core insulation)
<b>Thickness, insulation</b>	approx. 0.8 mm (Outer cable sheath)
<b>Wire colors</b>	brown, blue, black
<b>Overall twist</b>	3 wires, twisted
<b>External sheath, color</b>	black-gray RAL 7021
<b>External cable diameter D</b>	4.4 mm ±0.15 mm
<b>Smallest bending radius, fixed installation</b>	22 mm
<b>Smallest bending radius, movable installation</b>	44 mm
<b>Number of bending cycles</b>	4000000
<b>Bending radius</b>	44 mm
<b>Traversing path</b>	10 m
<b>Traversing rate</b>	3 m/s
<b>Acceleration</b>	10 m/s <sup>2</sup>
<b>Cable weight</b>	26 kg/km
<b>Outer sheath, material</b>	PUR
<b>Material conductor insulation</b>	PP
<b>Conductor material</b>	Bare Cu litz wires
<b>Insulation resistance</b>	≥ 100 GΩ*km (at 20 °C)
<b>Conductor resistance</b>	max. 58 Ω/km (at 20 °C)
<b>Nominal voltage, cable</b>	≤ 300 V
<b>Test voltage, cable</b>	≥ 3000 V
<b>Special properties</b>	Flexible cable conduit capable
<b>Special properties</b>	Silicone-free
<b>Special properties</b>	Free of substances which would hinder coating with paint or varnish
<b>Flame resistance</b>	in accordance with DIN UL-Style 20549
<b>Halogen-free</b>	in accordance with DIN VDE 0472 part 815
<b>Resistance to oil</b>	in accordance with DIN EN 60811-2-1
<b>Other resistance</b>	Highly resistant to acids, alkaline solutions and solvents

# Sensor/Actuator cable - SAC-3P-M12MS/6,0-PUR/ M12FS - 1533547

## Technical data

### Cable

<b>Other resistance</b>	hydrolysis and microbe resistant
<b>Other resistance</b>	partly UV-resistant in accordance with DIN EN ISO 4892-2-A
<b>Ambient temperature (operation)</b>	-40 °C ... 80 °C (cable, fixed installation)
<b>Ambient temperature (operation)</b>	-25 °C ... 80 °C (cable, flexible installation)

## classifications

### eCl@ss

<b>eCl@ss 4.0</b>	27060306
<b>eCl@ss 4.1</b>	27060306
<b>eCl@ss 5.0</b>	27061801
<b>eCl@ss 5.1</b>	27061801
<b>eCl@ss 6.0</b>	27061801
<b>eCl@ss 7.0</b>	27061801
<b>eCl@ss 8.0</b>	27061801

### ETIM

<b>ETIM 2.0</b>	EC000830
<b>ETIM 3.0</b>	EC001855
<b>ETIM 4.0</b>	EC001855
<b>ETIM 5.0</b>	EC001855


### UNSPSC

<b>UNSPSC 6.01</b>	31251501
<b>UNSPSC 7.0901</b>	31251501
<b>UNSPSC 11</b>	31251501
<b>UNSPSC 12.01</b>	31251501
<b>UNSPSC 13.2</b>	31251501

## approvals

UL Listed / cUL Listed / cULus Listed /

### Approval details

<b>UL Listed</b> 	
Nominal voltage UN	300 V
Nominal current IN	4 A

# Sensor/Actuator cable - SAC-3P-M12MS/6,0-PUR/ M12FS - 1533547

## approvals


mm²/AWG/kcmil	
---------------	--

cUL Listed	
Nominal voltage UN	300 V
Nominal current IN	4 A
mm²/AWG/kcmil	

cULus Listed	
--------------	--

## Drawings


Dimensioned drawing

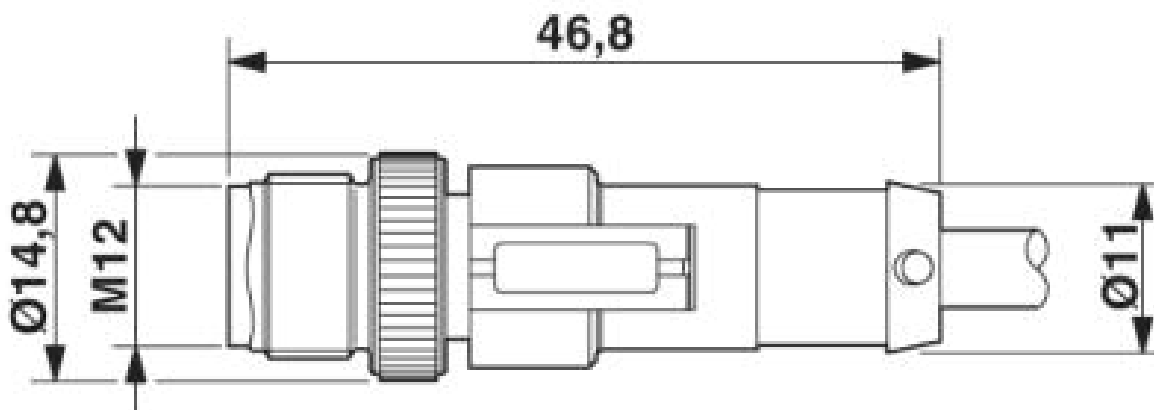

M12 x 1 plug, straight


# Sensor/Actuator cable - SAC-3P-M12MS/6,0-PUR/ M12FS - 1533547

Dimensioned drawing

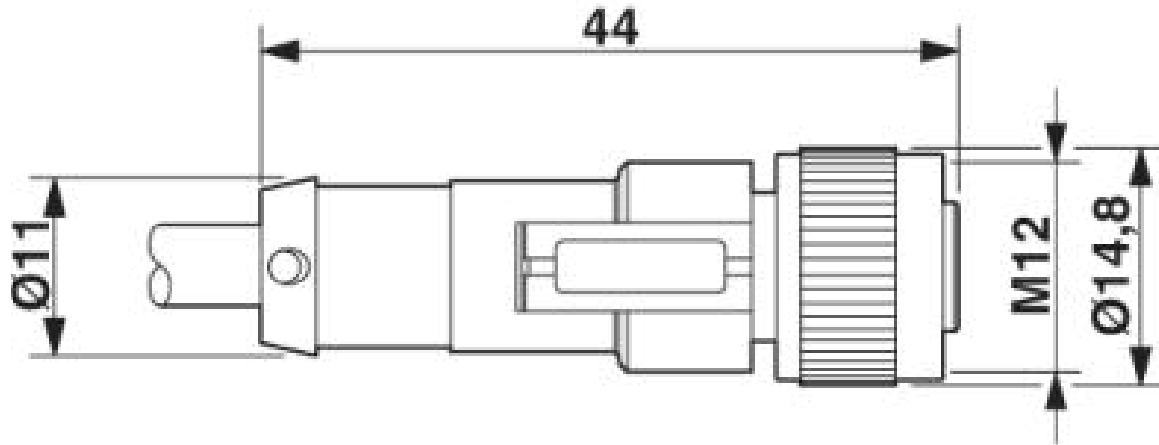

M12 x 1 socket, straight


Circuit diagram

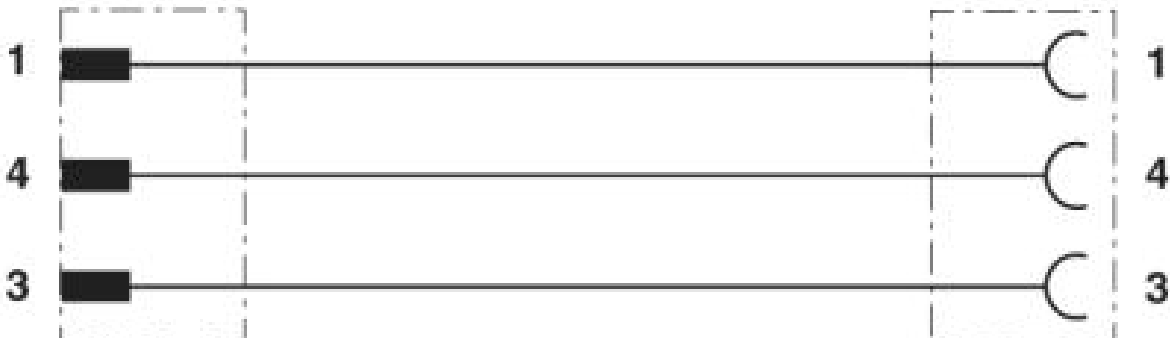

Contact assignment of M12 connector/socket

# Sensor/Actuator cable - SAC-3P-M12MS/6,0-PUR/ M12FS - 1533547


Schematic diagram

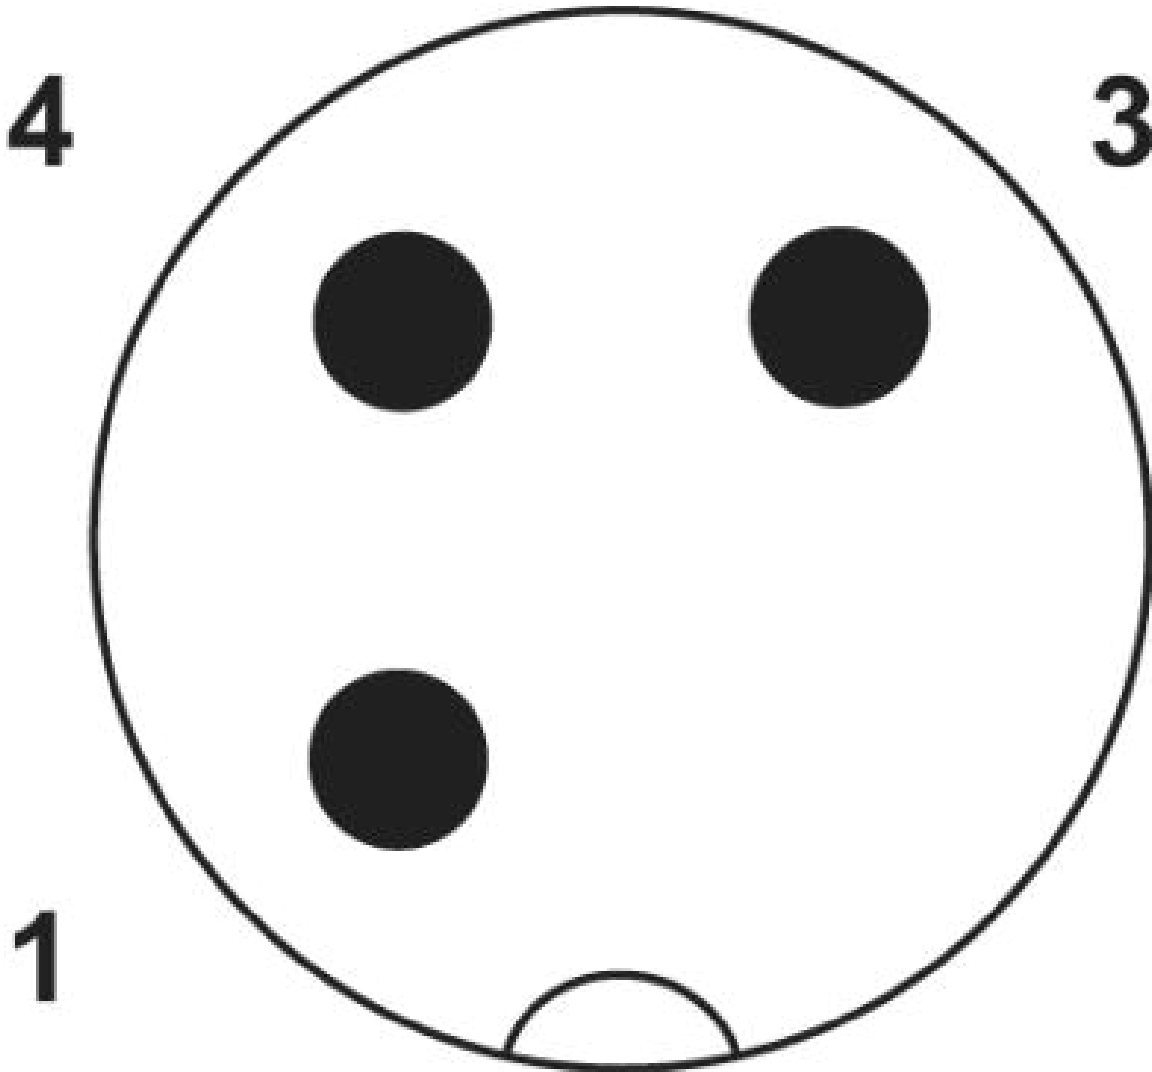

Pin assignment M12 plug, 3-pos., A-coded, view male side

# Sensor/Actuator cable - SAC-3P-M12MS/6,0-PUR/ M12FS - 1533547


Schematic diagram

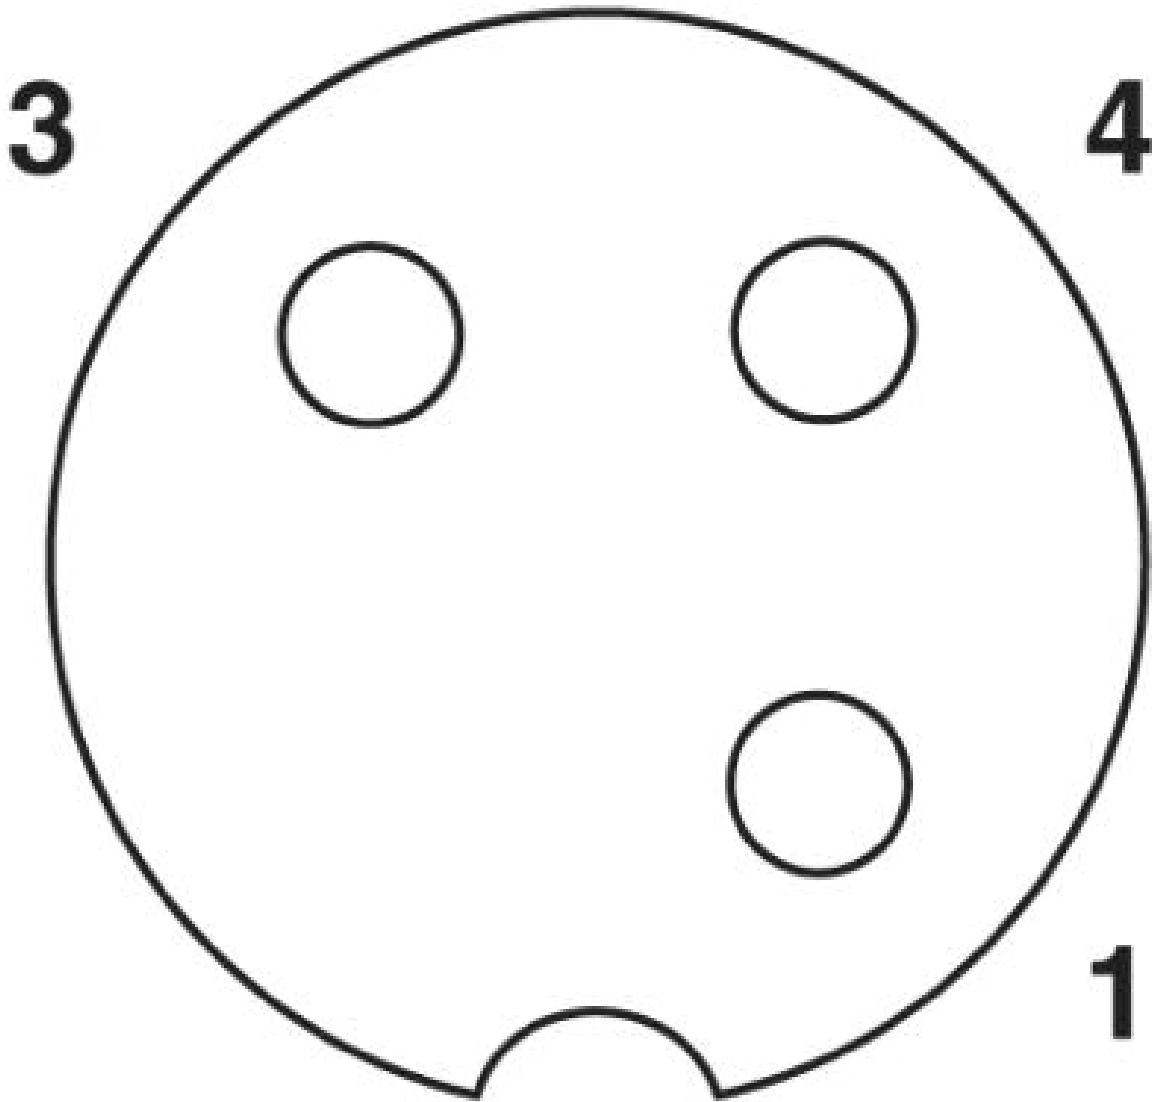

Pin assignment M12 socket, 3-pos., A-coded, view female side

## Sensor/Actuator cable - SAC-3P-M12MS/6,0-PUR/ M12FS - 1533547

Cable cross section

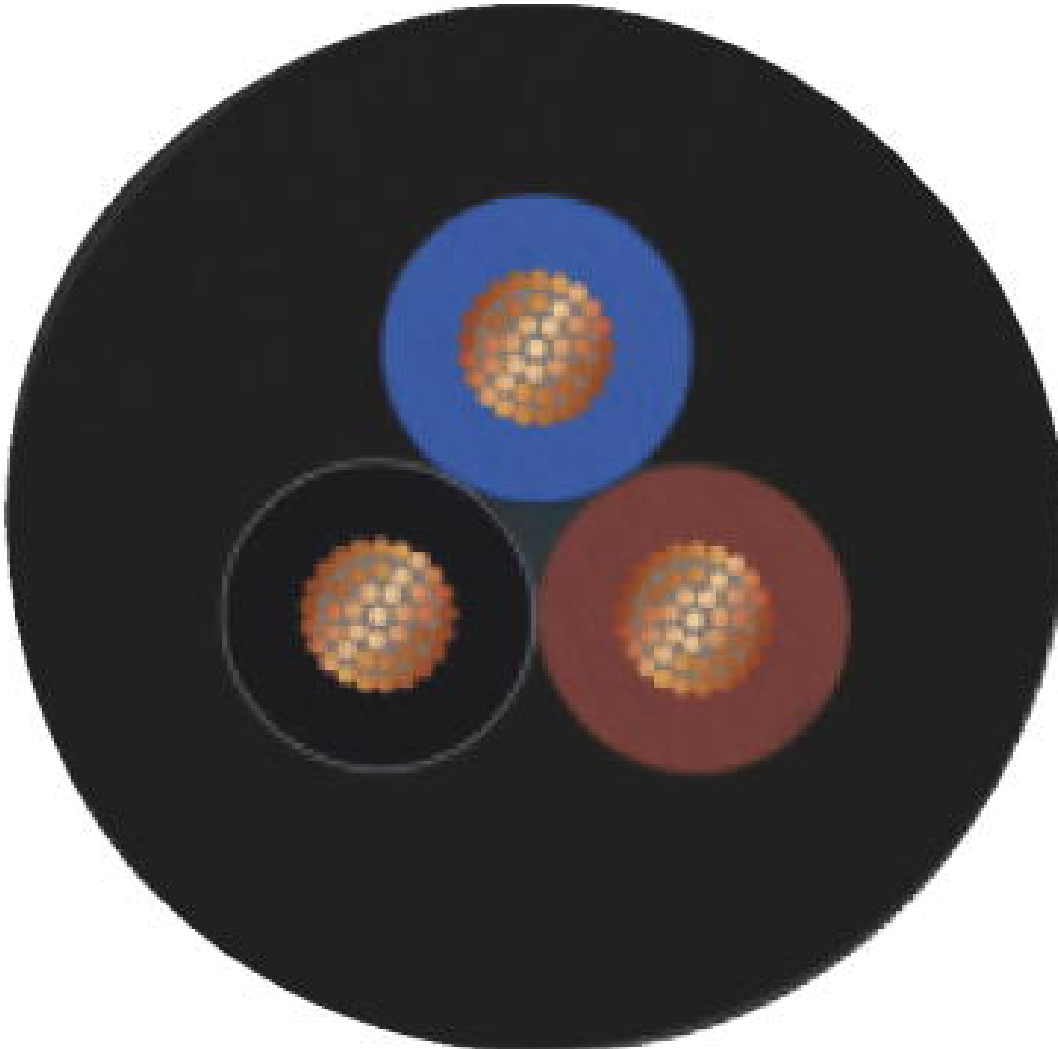

PUR halogen-free black [PUR]

© Phoenix Contact 2014 - all rights reserved  
<http://www.phoenixcontact.com>