

Patch cable - VS-RJ45-RJ45-94P-0,3 - 1417993

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Patch cable, CAT5e, 4-pair, shielded, line, assembled at both ends with straight RJ45/IP20 heads, length: 0.3 m

Ethernet

Key commercial data

| | |
|------------------|---------------|
| package_quantity | 1 |
| GTIN | 4046356534253 |

Technical data

Dimensions

| | |
|-----------------|-------|
| Length of cable | 0.3 m |
|-----------------|-------|

Ambient conditions

| | |
|----------------------|------|
| Degree of protection | IP20 |
|----------------------|------|

General data

| | |
|----------------------|--|
| Number of positions | 8 |
| Signal type/category | Ethernet CAT5 (IEC 11801:2002), 1 Gbps |
| Signal type/category | Ethernet CAT5e (TIA 568B:2001), 1 Gbps |

Characteristics head 1

| | |
|--|---------------------------|
| Head type | Plug Straight RJ45 / IP20 |
| No. of positions (pin connector pattern) | 8 (8) |
| Color | black |
| Material (component) | CuSn (Contact) |
| Material (component) | Ni/Au (Contact surface) |
| Material (component) | PC (Contact carriers) |
| Material (component) | TPU (Grip) |
| Shielded | Yes |

Characteristics head 2

| | |
|--|---------------------------|
| Head type | Plug Straight RJ45 / IP20 |
| No. of positions (pin connector pattern) | 8 (8) |
| Color | black |
| Material (component) | CuSn (Contact) |
| Material (component) | Ni/Au (Contact surface) |

Patch cable - VS-RJ45-RJ45-94P-0,3 - 1417993

Technical data

Characteristics head 2

| | |
|-----------------------------|-----------------------|
| Material (component) | PC (Contact carriers) |
| Material (component) | TPU (Grip) |
| Shielded | Yes |

Cable

| | |
|--|--|
| Cable type | Ethernet, flexible, CAT5e |
| Cable type (abbreviation) | 94B |
| UL AWM style | 20963 (80°C/30 V) |
| Signal type/category | Ethernet CAT5 (IEC 11801), 1 Gbps |
| Signal type/category | Ethernet CAT5e (TIA 568B), 1 Gbps |
| Cable structure | 4x2xAWG26/7; SF/UTP |
| Conductor cross section | 4x 2x 0.14 mm ² |
| AWG signal line | 26 |
| Conductor structure signal line | 7x 0.16 mm |
| Core diameter including insulation | 0.98 mm |
| Thickness, insulation | 0.25 mm |
| Wire colors | white/blue-blue, white/orange-orange, white/green-green, white/ brown-brown |
| Twisted pairs | 2 cores to the pair |
| Overall twist | 4 pairs for core |
| Shielding | Aluminum-coated foil, tinned copper braided shield |
| Optical shield covering | 70 % |
| External sheath, color | water blue RAL 5021 |
| Outer sheath thickness | 1 mm |
| External cable diameter D | 6.4 mm ±0.2 mm |
| Smallest bending radius, fixed installation | 25.6 mm |
| Smallest bending radius, movable installation | 51.2 mm |
| Tensile strength short-term/long-term | ≤ 100 N |
| Cable weight | 47 kg/km |
| Outer sheath, material | PUR |
| Material conductor insulation | PE |
| Conductor material | Bare Cu litz wires |
| Insulation resistance | ≥ 500 MΩ*km |
| Loop resistance | ≤ 290 Ω (per kilometer) |
| Working capacitance | 48 nF (At 1 kHz) |
| Wave impedance | 100 Ω ±5 Ω (at 100 MHz) |
| Signal runtime | 5.3 ns/m |
| Coupling resistance | ≤ 100.00 mΩ/m (At 10 MHz) |
| Nominal voltage, cable | ≤ 100 V |
| Nominal voltage, cable | 300 V (Outer cable sheath) |
| Test voltage Core/Core | 700 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 700 V (50 Hz, 1 min.) |

Patch cable - VS-RJ45-RJ45-94P-0,3 - 1417993

Technical data

Cable

| | |
|--|---|
| Flame resistance | IEC 60332-1-2 |
| Halogen-free | According to IEC 60754-1 |
| Resistance to oil | in accordance with DIN EN 60811-2-1 |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| Ambient temperature (operation) | -20 °C ... 80 °C (cable, flexible installation) |
| Ambient temperature (installation) | -20 °C ... 80 °C |
| Ambient temperature (storage/transport) | -20 °C ... 80 °C |

classifications

eCl@ss

| | |
|-------------------|----------|
| eCl@ss 4.0 | 27250591 |
| eCl@ss 4.1 | 27240409 |
| eCl@ss 5.0 | 27259207 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 19170107 |
| eCl@ss 7.0 | 19170112 |
| eCl@ss 8.0 | 19170112 |

ETIM

| | |
|-----------------|----------|
| ETIM 2.0 | EC001262 |
| ETIM 3.0 | EC001262 |
| ETIM 4.0 | EC000830 |
| ETIM 5.0 | EC001262 |


UNSPSC

| | |
|----------------------|----------|
| UNSPSC 6.01 | 26121609 |
| UNSPSC 7.0901 | 26121609 |
| UNSPSC 11 | 26121609 |
| UNSPSC 12.01 | 26121609 |
| UNSPSC 13.2 | 26121609 |

Drawings


Patch cable - VS-RJ45-RJ45-94P-0,3 - 1417993

Dimensioned drawing

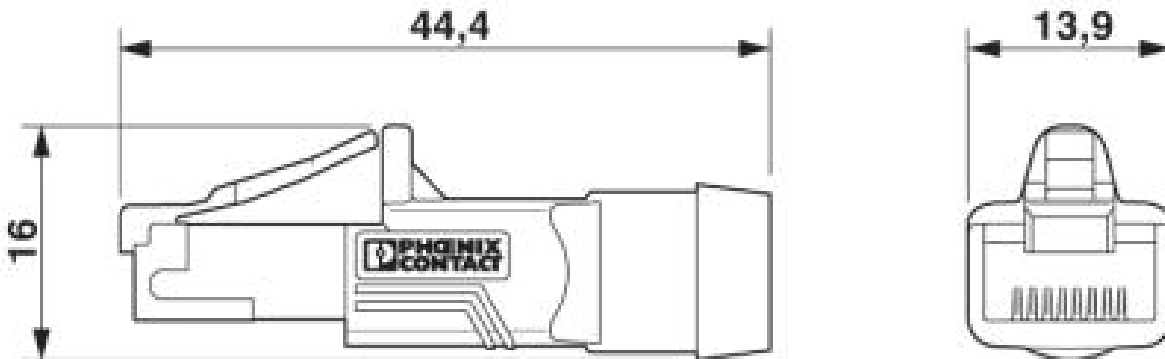

RJ45 connector, IP20

Circuit diagram

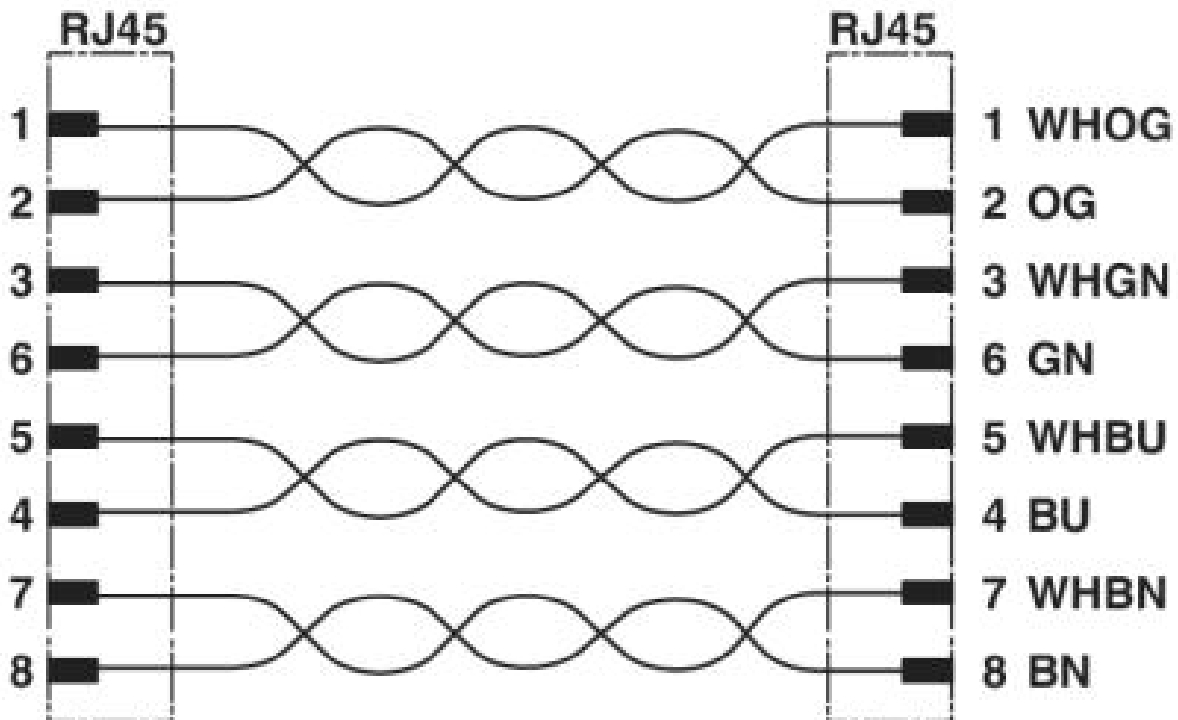

Patch cable - VS-RJ45-RJ45-94P-0,3 - 1417993

Cable cross section



Ethernet, flexible, CAT5e [94B]

© Phoenix Contact 2014 - all rights reserved
<http://www.phoenixcontact.com>