

Flush-type connector - SACC-SQ-M12FS-4CON-20/0,5 - 1419797

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/Actuator flush-type socket, 4-pos., M12, A-coded, front/square flange mounting, with 0.5 m TPE litz wire, 4 x 0.34 mm²

Product Features

- 4 x fixing hole, 3.2 mm
- With form seal for M3 screws



Key commercial data

package_quantity	1
GTIN	4046356532976

Technical data

Dimensions

Length of cable	0.5 m
-----------------	-------

Ambient conditions

Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
Ambient temperature (operation)	-40 °C ... 85 °C (without mechanical actuation)
Degree of protection	IP67

General

Note	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Rated current at 40°C	4 A
Rated voltage	250 V
Number of positions	4
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Coding	A - standard
Standards/regulations	M12 connector IEC 61076-2-101
Signal type/category	Universal

Flush-type connector - SACC-SQ-M12FS-4CON-20/0,5 - 1419797

Technical data

General

Status display	No
Surge voltage category	II
Pollution degree	3
Connection method	Individual wires
Insertion/withdrawal cycles	> 100
Torque	3 Nm ... 4 Nm (Installation-side)
Mounting type	Front mounting Square flange 20 mm side length

Material

Inflammability class according to UL 94	V0
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA 66
Material of grip body	Zinc die-cast, nickel-plated
Material, knurls	Zinc die-cast, nickel-plated
Sealing material	FKM

Cable

Cable type	TPE litz wire
Conductor cross section	0.34 mm ²
AWG signal line	22
Conductor structure signal line	7x 0.25 mm
Core diameter including insulation	1.2 mm ±0.07 mm
Thickness, insulation	0.21 mm
Wire colors	brown, blue, black, white
Material conductor insulation	TPE
Conductor material	Tin-plated Cu litz wires
Insulation resistance	≥ 20 MΩ*km
Conductor resistance	≤ 57.6 mΩ/m
Nominal voltage, cable	300 V
Test voltage, cable	2000 V AC
Ambient temperature (operation)	-40 °C ... 85 °C (cable, fixed installation)
Ambient temperature (operation)	-25 °C ... 85 °C (cable, flexible installation)

classifications

eCl@ss

eCl@ss 4.0	27140815
eCl@ss 4.1	27140815
eCl@ss 5.0	27143423
eCl@ss 5.1	27143423
eCl@ss 6.0	27279220
eCl@ss 7.0	27440103

Flush-type connector - SACC-SQ-M12FS-4CON-20/0,5 - 1419797

classifications

eCl@ss

eCl@ss 8.0	27440103
------------	----------

ETIM

ETIM 4.0	EC002061
ETIM 5.0	EC002061


UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	39121413

approvals

GOST / GOST /

Approval details



accessories

Protective cap

PROT-M12 - 1680539



PROT-M12 SH - 1503302



Flush-type connector - SACC-SQ-M12FS-4CON-20/0,5 - 1419797


accessories

PROT-M12 FB - 1555538



Drawings


Dimensioned drawing

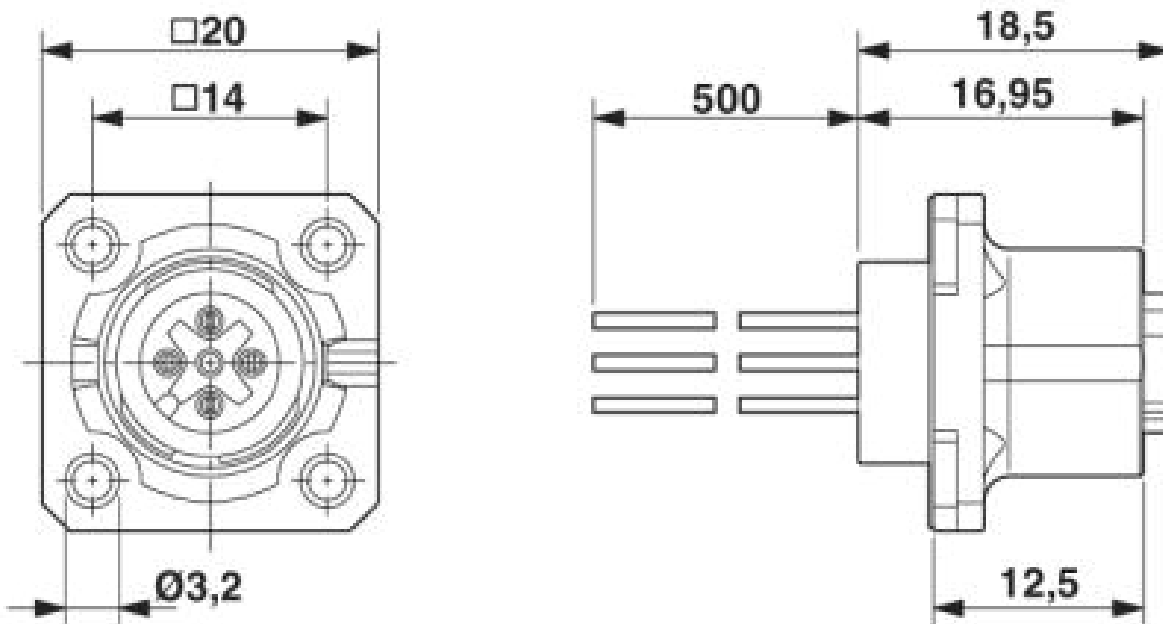

M12 flush-type socket, square flange

Flush-type connector - SACC-SQ-M12FS-4CON-20/0,5 - 1419797


Circuit diagram

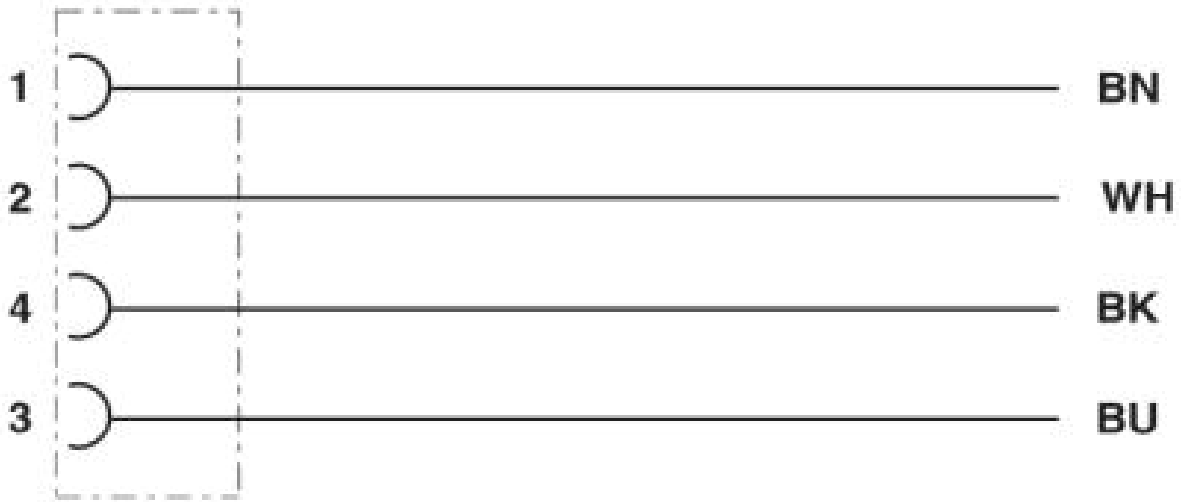

Contact assignment of the M12 socket

Flush-type connector - SACC-SQ-M12FS-4CON-20/0,5 - 1419797

Schematic diagram

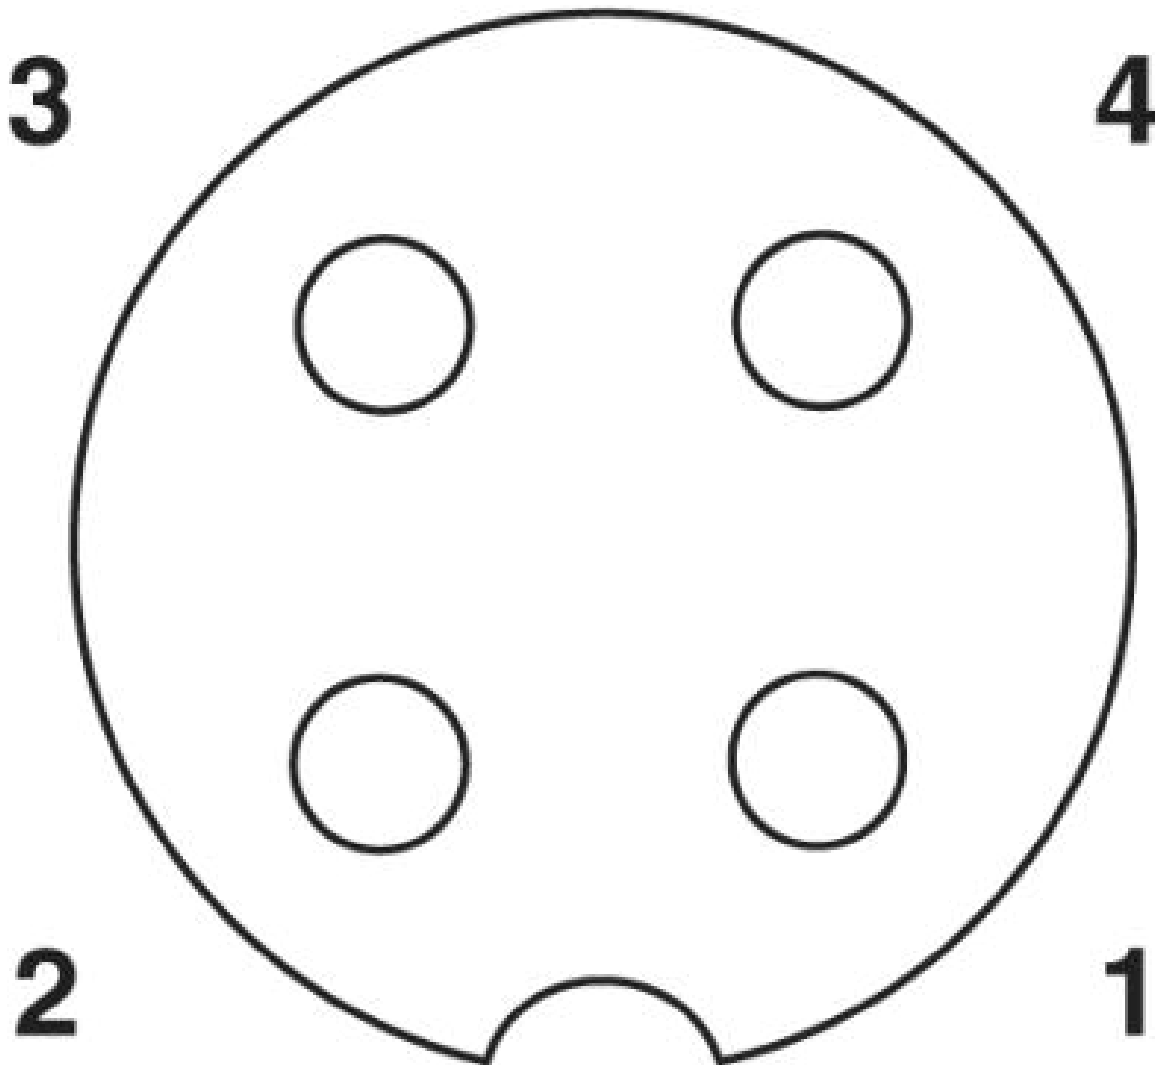

Pin assignment M12 socket, 4-pos., A-coded, view female side

© Phoenix Contact 2014 - all rights reserved
<http://www.phoenixcontact.com>