

# Crimp contact - CC-1,0-ST-0,34-MS AU - 1452356

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Crimp contact, diameter 1 mm, for all 3 to 5-pos. contact inserts, crimp range from 0.08 mm<sup>2</sup> - 0.34 mm<sup>2</sup>.

## Key commercial data

<b>package_quantity</b>	100
<b>GTIN</b>	4046356544757

## Technical data

### Material data

<b>Contact material</b>	CuZn
<b>Contact surface material</b>	AU

## classifications

### eCl@ss

<b>eCl@ss 4.0</b>	27250313
<b>eCl@ss 4.1</b>	27250313
<b>eCl@ss 5.0</b>	27143423
<b>eCl@ss 5.1</b>	27143423
<b>eCl@ss 6.0</b>	27143423
<b>eCl@ss 7.0</b>	27449001
<b>eCl@ss 8.0</b>	27449001

### ETIM

<b>ETIM 4.0</b>	EC000796
<b>ETIM 5.0</b>	EC000796

### UNSPSC

<b>UNSPSC 6.01</b>	31251501
<b>UNSPSC 7.0901</b>	31251501
<b>UNSPSC 11</b>	31251501
<b>UNSPSC 12.01</b>	31251501
<b>UNSPSC 13.2</b>	31251501

# Crimp contact - CC-1,0-ST-0,34-MS AU - 1452356

approvals

GOST / GOST /

Approval details



accessories


**Crimping tool**

CRIMPFOX-TC MP - 1212510



Drawings

Dimensioned drawing

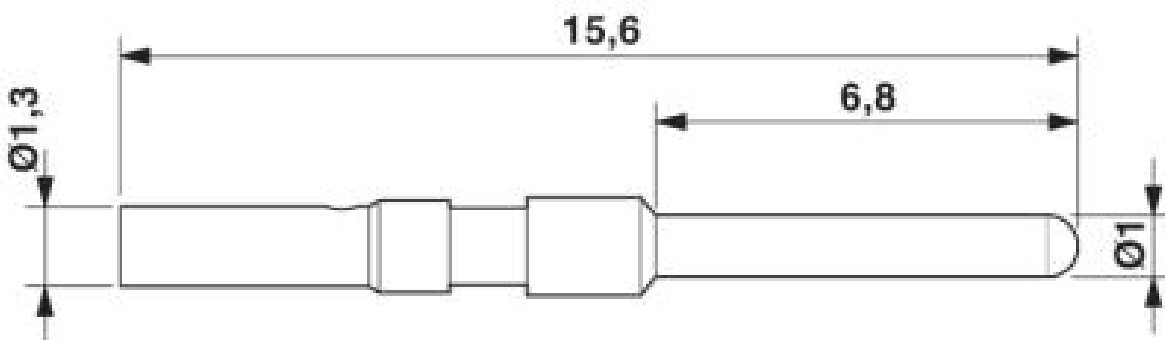

Crimp contact, diameter 1.0 mm

© Phoenix Contact 2014 - all rights reserved  
<http://www.phoenixcontact.com>