

# Contact insert - HC-BB 10-EBUC - 1687435

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



HEAVYCON female insert, BB10 series, 10-pos., crimp connection

## Key commercial data

package_quantity	1
GTIN	4017918609412

## Technical data

### General

Note	For HC-B6 housing, crimp contacts CK 2,5-ED (crimp contacts not included in scope of supply)
Connection method	Crimp connection
Pollution degree	3
Surge voltage category	III
Number of positions	10+PE
Insertion/withdrawal cycles	≥ 500
Type	B6
Conductor cross section	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Connection cross section AWG	20 ... 12
Stripping length of the individual wire	7.5 mm
Assembly instructions	- Housing heights of h ≥ 72 mm are recommended when there is a high number of wires.
Connection	Connectors may be plugged in only when there is no load/voltage.

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C (including heating up of contacts)
---------------------------------	--

### Material data

Inflammability class according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PC

### Electrical characteristics

Rated voltage (III/3)	500 V
Rated surge voltage	6 kV

# Contact insert - HC-BB 10-EBUC - 1687435

## Technical data

### Electrical characteristics

<b>Rated current</b>	16 A
----------------------	------

## classifications

### eCl@ss

<b>eCl@ss 4.0</b>	27140816
<b>eCl@ss 4.1</b>	27140816
<b>eCl@ss 5.0</b>	27143424
<b>eCl@ss 5.1</b>	27143424
<b>eCl@ss 6.0</b>	27261205
<b>eCl@ss 7.0</b>	27440207
<b>eCl@ss 8.0</b>	27440207

### ETIM

<b>ETIM 2.0</b>	EC000438
<b>ETIM 3.0</b>	EC000438
<b>ETIM 4.0</b>	EC000438
<b>ETIM 5.0</b>	EC000438

### UNSPSC

<b>UNSPSC 6.01</b>	30211923
<b>UNSPSC 7.0901</b>	39121522
<b>UNSPSC 11</b>	39121522
<b>UNSPSC 12.01</b>	39121522
<b>UNSPSC 13.2</b>	39121522

## approvals

CSA / UL Recognized / GOST /

### Approval details

Nominal voltage UN	600 V
Nominal current IN	16 A
mm <sup>2</sup> /AWG/kcmil	20-12

--	--

# Contact insert - HC-BB 10-EBUC - 1687435

approvals



accessories

## Mounting material

HC-B-PES - 1604997



---

HC-B-3PE - 1644326



---

HC-B-ZG - 1685327



---

HC-B-ZS - 1685330



---

## Coding element

## Contact insert - HC-BB 10-EBUC - 1687435

accessories

HC-CBU - 1676860



HC-CB - 1772722



HC-CST - 1676857



CK2,5-ED-BB - 1584693



### **Plug assembly frame**

HC-SMR-2B 6 - 1687998



# Contact insert - HC-BB 10-EBUC - 1687435

## accessories

HC-SMR-B 6 - 1687956



---

### Plug mounting plate

HC-SMP 125-B 6-AML - 1660957



---

### Adapter plate

HC-B 24-ADP-B 6-GY - 1660407



---

### Docking frame

HC-B 6-ANDOCK - 1586112



---

### Assembly tool

CK2,5-EWZ - 1662722



# Contact insert - HC-BB 10-EBUC - 1687435

accessories

---

## Crimping tool

CRIMPFOX-1,6/2,5-ED-4,0 - 1687419



## Crimp contact

CK2,5-ED-0,50BU AG - 1663640



CK2,5-ED-0,75BU AG - 1663653



CK2,5-ED-1,00BU AG - 1663666



CK2,5-ED-1,50BU AG - 1663679



## Contact insert - HC-BB 10-EBUC - 1687435

### accessories

CK2,5-ED-2,50BU AG - 1663682



CK2,5-ED-3,00BU AG - 1663695



CK2,5-ED-4,00BU AG - 1663705



CK2,5-ED-0,50BU AU - 1674859



CK2,5-ED-1,00BU AU - 1674833



CK2,5-ED-1,50BU AU - 1674820



## Contact insert - HC-BB 10-EBUC - 1687435

### accessories

---

CK2,5-ED-2,50BU AU - 1674862



CK2,5-ED-4,00BU AU - 1674846



### accessories

CK2,5-ED-0,37BU AG - 1585634



CK2,5-ED-0,37BU AU - 1585647




### Drawings



# Contact insert - HC-BB 10-EBUC - 1687435


Diagram

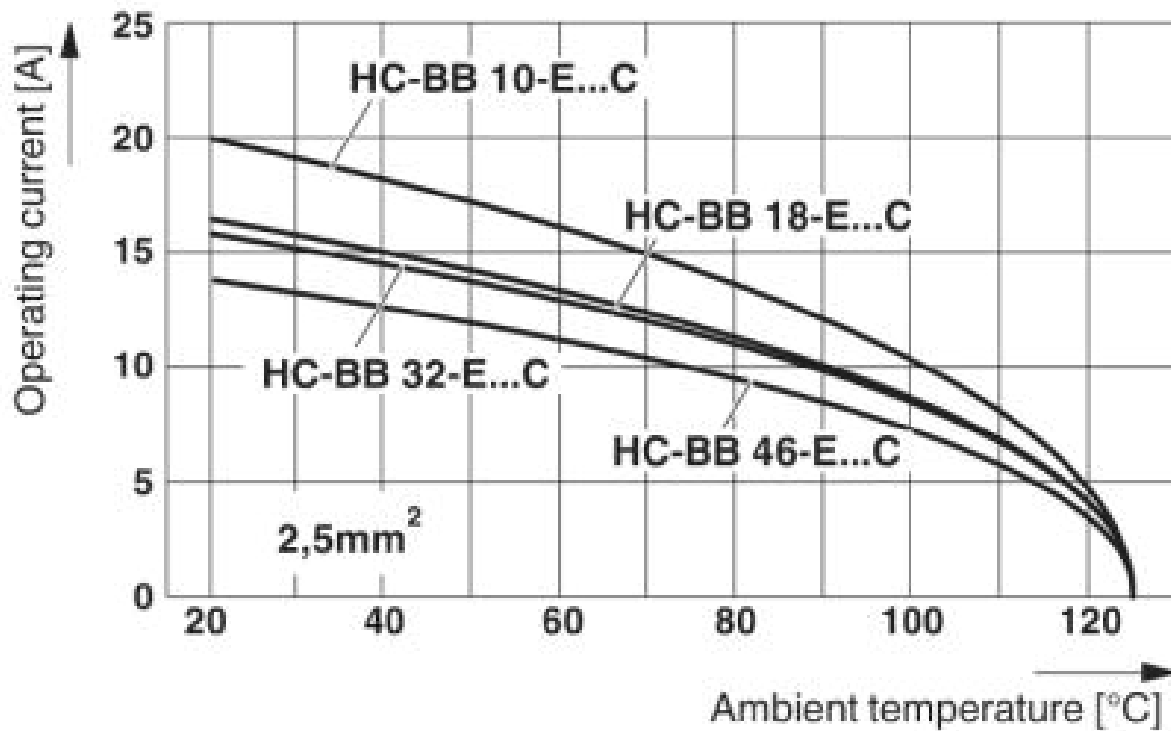

Derating diagram: Conductor cross section 2.5 mm<sup>2</sup>


# Contact insert - HC-BB 10-EBUC - 1687435

Diagram

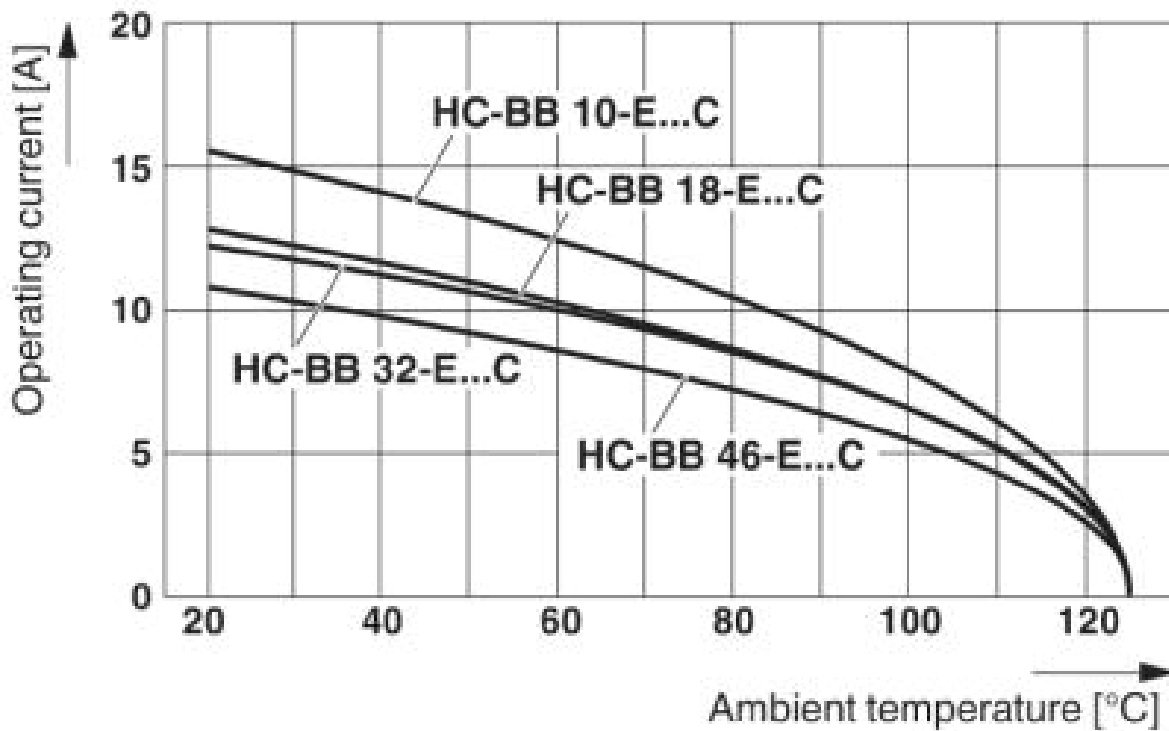

Derating diagram: Conductor cross section 1.5 mm<sup>2</sup>


Dimensioned drawing

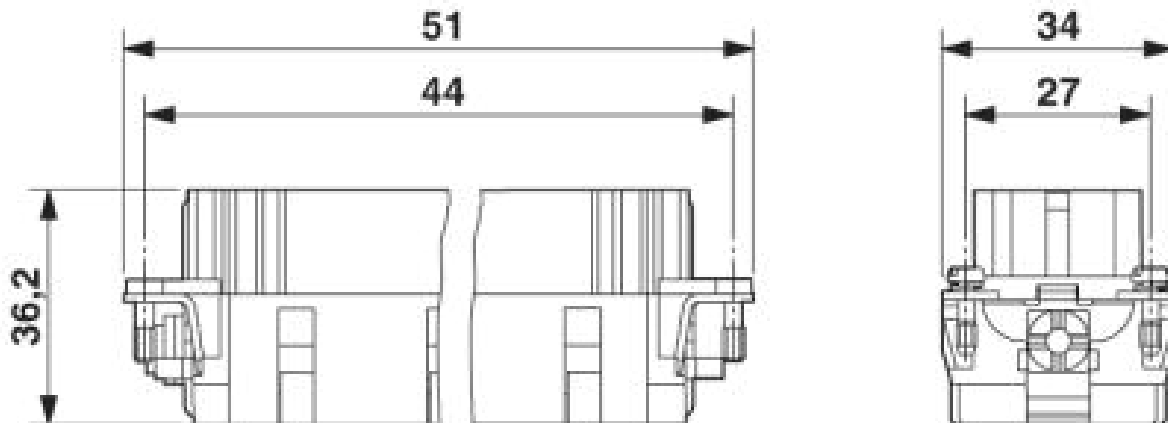

Female insert


# Contact insert - HC-BB 10-EBUC - 1687435

Dimensioned drawing

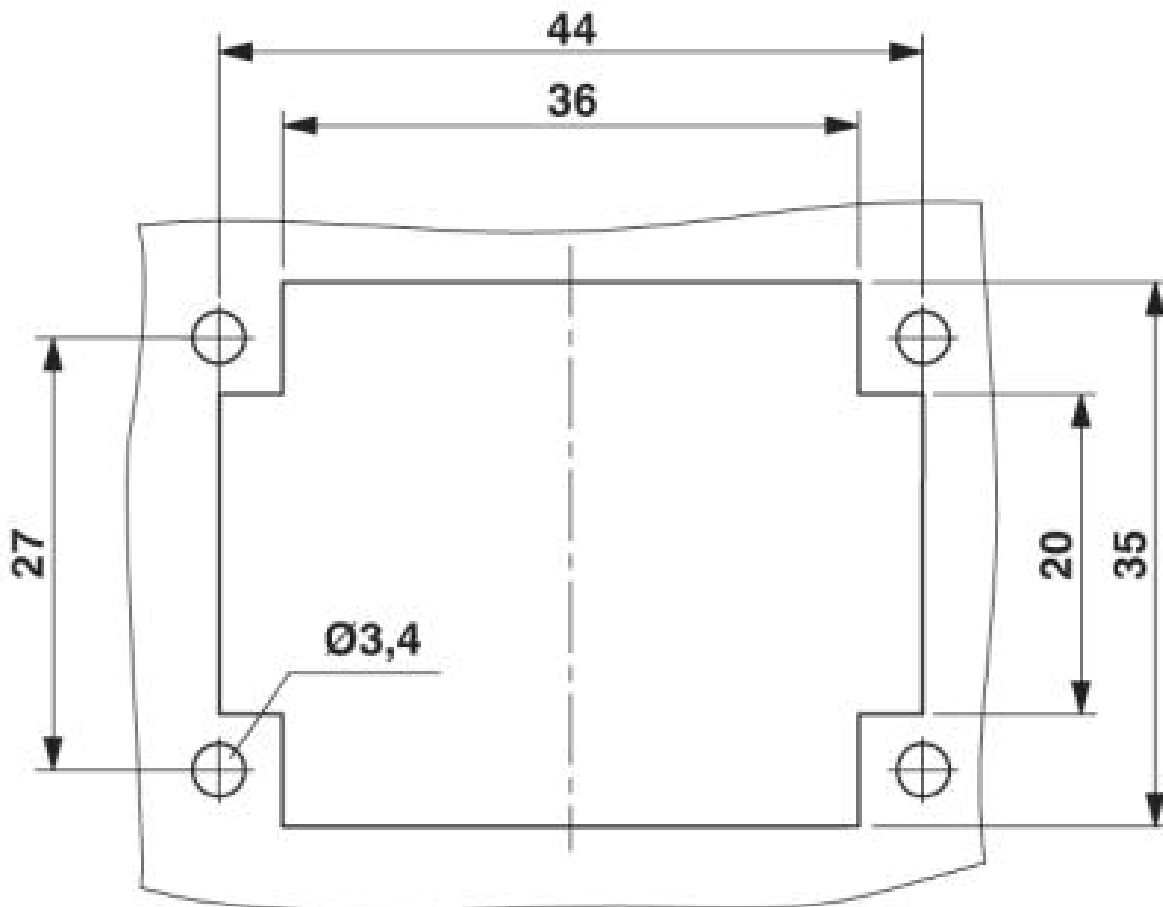


Panel cutout

Dimensioned drawing

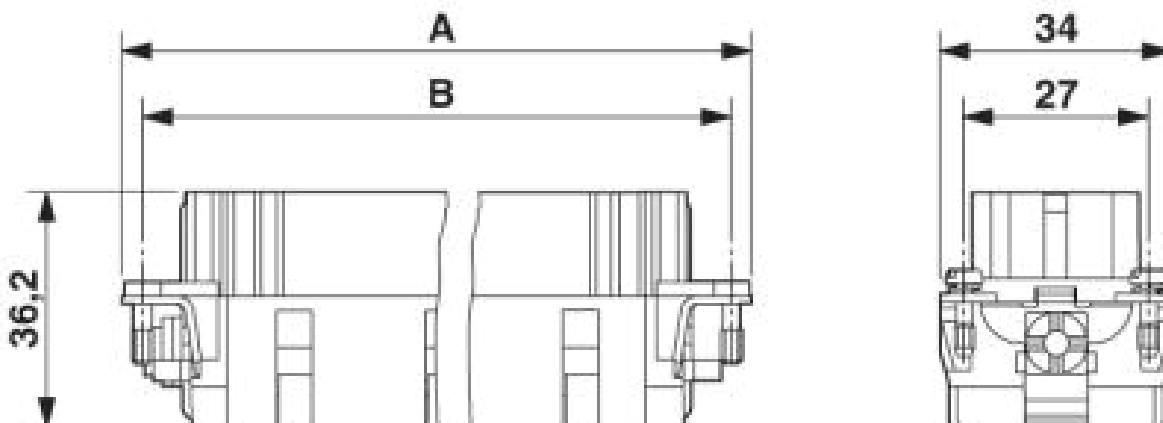

# Contact insert - HC-BB 10-EBUC - 1687435

Schematic diagram

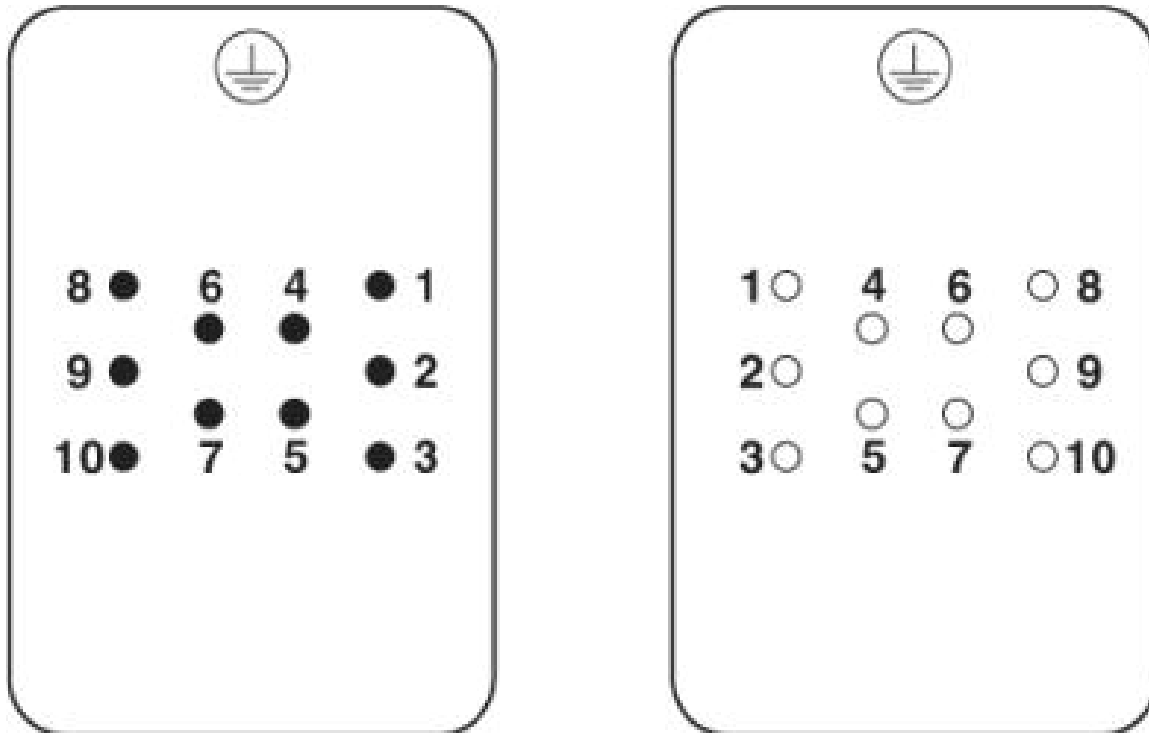

Connector pin assignment: Left pin - right socket

© Phoenix Contact 2014 - all rights reserved  
<http://www.phoenixcontact.com>