

# Contact insert - HC-BB 46-EBUC - 1687493

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



HEAVYCON female insert, BB46 series, 46-pos., crimp connection

## Key commercial data

<b>package_quantity</b>	1
<b>GTIN</b>	4017918609467

## Technical data

### General

<b>Note</b>	For HC-B24 housing, crimp contacts CK 2,5-ED (crimp contacts not included in scope of supply)
<b>Connection method</b>	Crimp connection
<b>Pollution degree</b>	3
<b>Surge voltage category</b>	III
<b>Number of positions</b>	46+PE
<b>Insertion/withdrawal cycles</b>	≥ 500
<b>Type</b>	B24
<b>Connection in acc. with standard</b>	IEC / EN
<b>Conductor cross section</b>	0.5 mm <sup>2</sup> ... 4 mm <sup>2</sup>
<b>Connection cross section AWG</b>	20 ... 12
<b>Stripping length of the individual wire</b>	7.5 mm
<b>Assembly instructions</b>	- Housing heights of h ≥ 72 mm are recommended when there is a high number of wires.
<b>Connection</b>	Connectors may be plugged in only when there is no load/voltage.

### Ambient conditions

<b>Ambient temperature (operation)</b>	-40 °C ... 125 °C (including heating up of contacts)
--	--

### Material data

<b>Inflammability class according to UL 94</b>	V0
<b>Contact material</b>	Copper alloy
<b>Contact surface material</b>	Ag (alternatively Au)
<b>Contact carrier material</b>	PC

### Electrical characteristics

<b>Rated voltage (III/3)</b>	500 V
------------------------------	-------

# Contact insert - HC-BB 46-EBUC - 1687493

## Technical data

### Electrical characteristics

<b>Rated surge voltage</b>	6 kV
<b>Rated current</b>	16 A

## classifications

### eCl@ss

<b>eCl@ss 4.0</b>	27140816
<b>eCl@ss 4.1</b>	27140816
<b>eCl@ss 5.0</b>	27143424
<b>eCl@ss 5.1</b>	27143424
<b>eCl@ss 6.0</b>	27261205
<b>eCl@ss 7.0</b>	27440207
<b>eCl@ss 8.0</b>	27440207

### ETIM

<b>ETIM 2.0</b>	EC000438
<b>ETIM 3.0</b>	EC000438
<b>ETIM 4.0</b>	EC000438
<b>ETIM 5.0</b>	EC000438


### UNSPSC

<b>UNSPSC 6.01</b>	30211923
<b>UNSPSC 7.0901</b>	39121522
<b>UNSPSC 11</b>	39121522
<b>UNSPSC 12.01</b>	39121522
<b>UNSPSC 13.2</b>	39121522

## approvals


CSA / UL Recognized / GOST /

### Approval details

	
Nominal voltage UN	600 V
Nominal current IN	16 A
mm <sup>2</sup> /AWG/kcmil	20-12

# Contact insert - HC-BB 46-EBUC - 1687493

approvals

UL Recognized 

GOST 

accessories

**Mounting material**

HC-B-PES - 1604997



HC-B-3PE - 1644326



HC-B-ZG - 1685327



HC-B-ZS - 1685330



**Coding element**

## Contact insert - HC-BB 46-EBUC - 1687493

accessories

HC-CBU - 1676860



HC-CB - 1772722



HC-CST - 1676857



CK2,5-ED-BB - 1584693



### **Plug assembly frame**

HC-SMR-B24 - 1687985



### **Plug mounting plate**

## Contact insert - HC-BB 46-EBUC - 1687493

accessories

HC-SMP 150-B24-AMQ - 1660944



---

### Docking frame

HC-B 24-ANDOCK - 1586141



---

### Assembly tool

CK2,5-EWZ - 1662722



---

### Crimping tool

CRIMPFOX-1,6/2,5-ED-4,0 - 1687419



---

### Crimp contact

CK2,5-ED-0,50BU AG - 1663640



## Contact insert - HC-BB 46-EBUC - 1687493

accessories

---

CK2,5-ED-0,75BU AG - 1663653



CK2,5-ED-1,00BU AG - 1663666



CK2,5-ED-1,50BU AG - 1663679



CK2,5-ED-2,50BU AG - 1663682



CK2,5-ED-3,00BU AG - 1663695



## Contact insert - HC-BB 46-EBUC - 1687493

### accessories

CK2,5-ED-4,00BU AG - 1663705



CK2,5-ED-0,50BU AU - 1674859



CK2,5-ED-1,00BU AU - 1674833



CK2,5-ED-1,50BU AU - 1674820



CK2,5-ED-2,50BU AU - 1674862



CK2,5-ED-4,00BU AU - 1674846



# Contact insert - HC-BB 46-EBUC - 1687493

accessories

---

accessories

CK2,5-ED-0,37BU AG - 1585634




CK2,5-ED-0,37BU AU - 1585647



---

## Drawings

Diagram

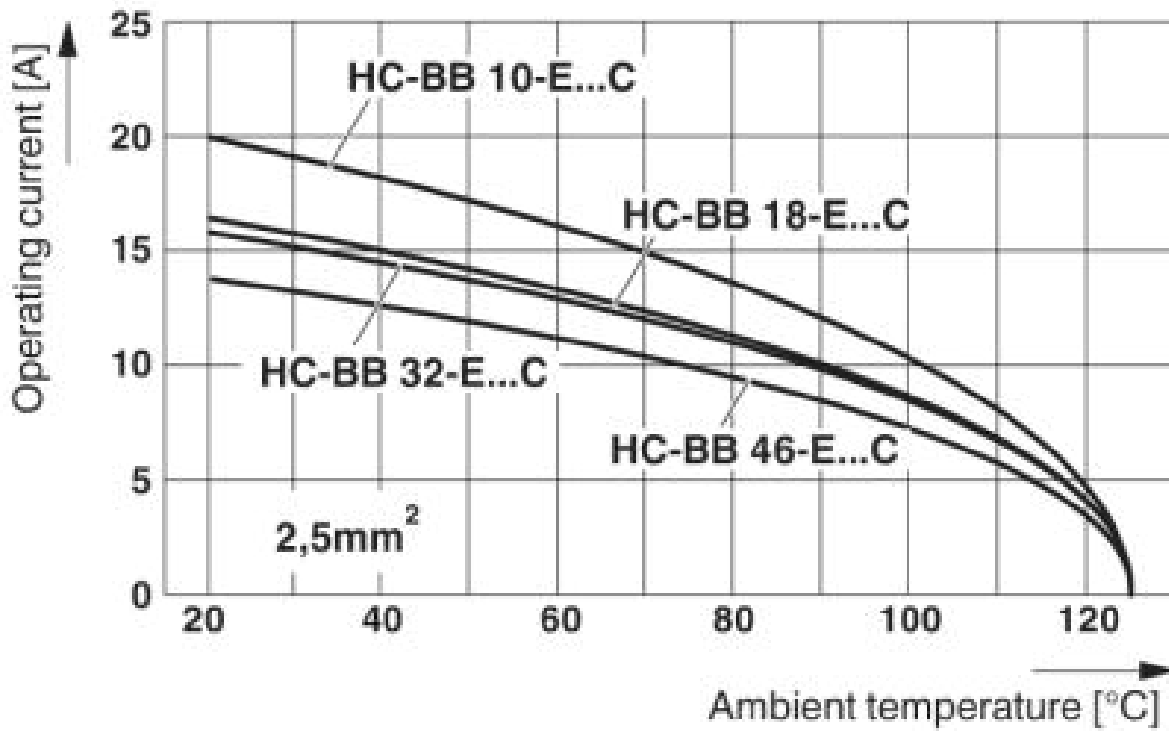


Derating diagram: Conductor cross section 2.5 mm<sup>2</sup>




# Contact insert - HC-BB 46-EBUC - 1687493

Diagram

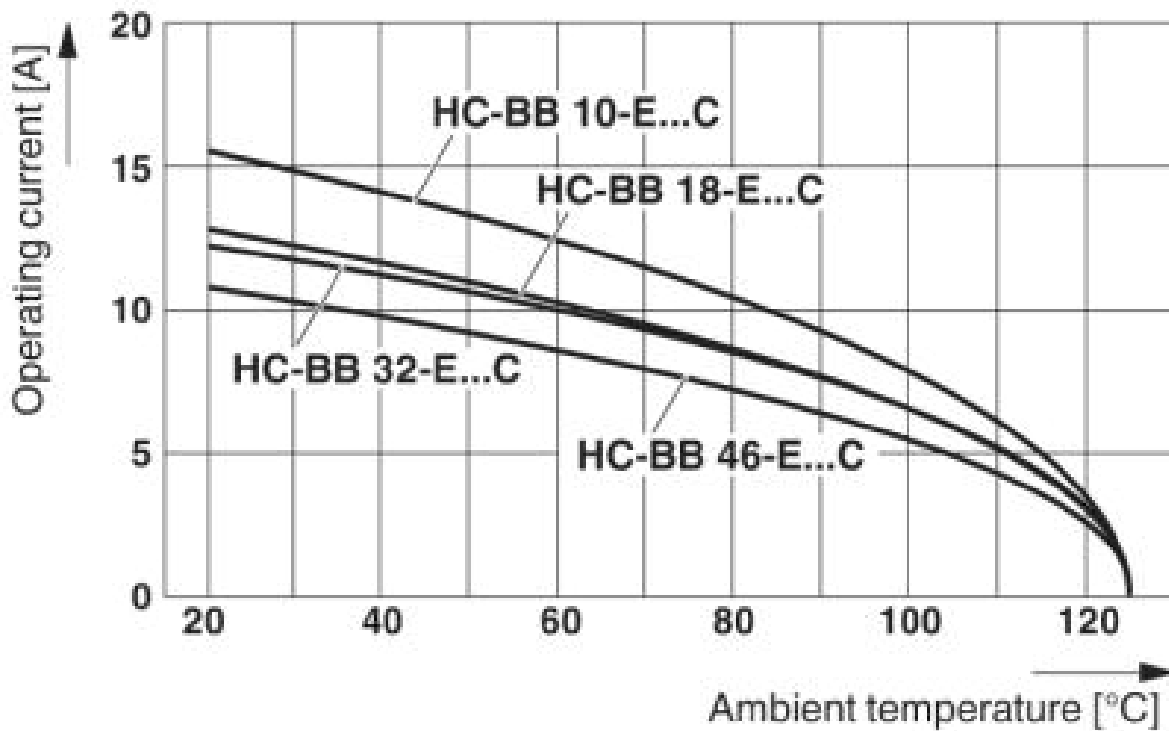

Derating diagram: Conductor cross section 1.5 mm<sup>2</sup>


Dimensioned drawing

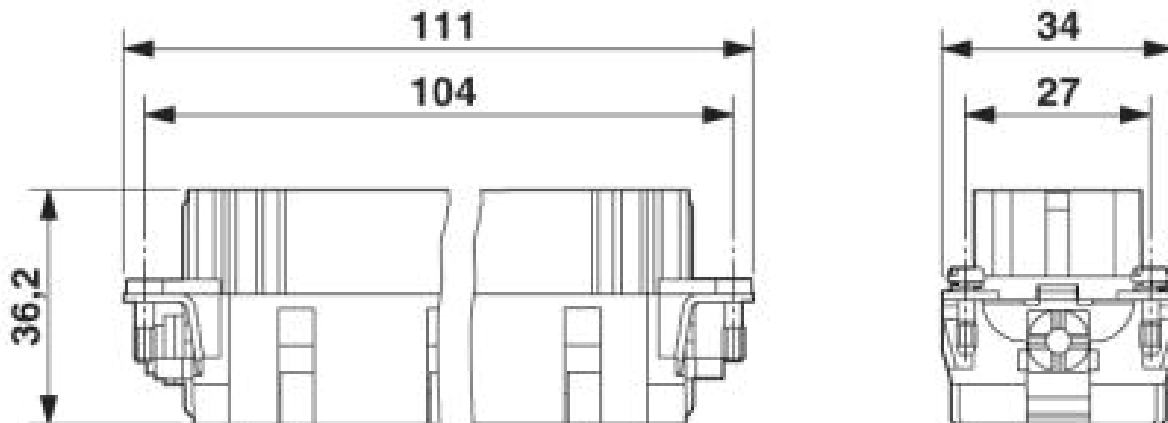

Female insert

# Contact insert - HC-BB 46-EBUC - 1687493

Dimensioned drawing

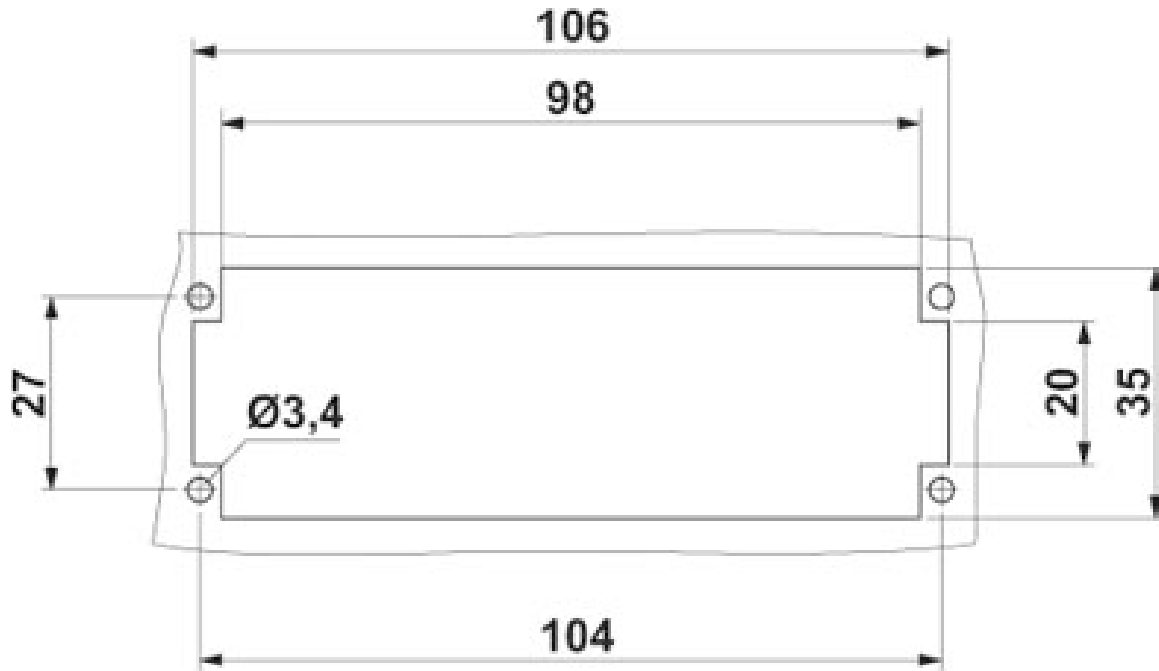

Panel cutout

# Contact insert - HC-BB 46-EBUC - 1687493

Schematic diagram

