

System connection - PLC-V8/FLK14/OUT - 2295554

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



V8-OUTPUT adapter for eight 6.2 mm PLC interfaces (1 PDT, etc./see "Supplementary Products"). 14-pos. flat-ribbon cable connection for the PLC system cabling, control logic: Plus switching

Key commercial data

package_quantity	1
GTIN	4017918189143

Technical data

Dimensions

Width	49.6 mm
Height	100 mm
Depth	94 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C

General

Nominal voltage U_N	24 V DC \pm 25 %
Max. current carrying capacity per branch	1 A (per signal path)
Max. total current of voltage supply	3 A
Number of positions	14
Status display	Green LED
Test voltage	500 V AC (50 Hz, 1 min.)
Mounting position	any
Standards/regulations	IEC 60664
Standards/regulations	DIN EN 50178
Standards/regulations	IEC 62103
Pollution degree	2
Surge voltage category	III
Rated surge voltage	0.8 kV

Connection data for connection 1

Connection name	Power supply
Connection in acc. with standard	IEC / EN

System connection - PLC-V8/FLK14/OUT - 2295554

Technical data

Connection data for connection 1

Number of connections	1
Connection method	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M3

Connection data for connection 2

Connection name	Signal level
Number of connections	1
Connection method	IDC/FLK pin strip (2.54 mm)
Number of positions	14

Supported controller

Controller	SIEMENS S7-400
- suitable I/O card	6ES7 422-1BL00-0AA0
- suitable I/O card	6ES7 422-7BL00-0AB0
Controller	GE-FANUC 90-30
- suitable I/O card	IC693 MDL732
- suitable I/O card	IC693 MDL740
- suitable I/O card	IC693 MDL742
Controller	ALLEN-BRADLEY ControlLogix
- suitable I/O card	1756-OB32
- suitable I/O card	1756-OB16E
Controller	ALLEN-BRADLEY PLC 5
- suitable I/O card	1771 OBN
Controller	ALLEN-BRADLEY SLC 500
- suitable I/O card	1746 OB16
- suitable I/O card	1746 OB 32
Controller	HONEYWELL PlantScape
- suitable I/O card	TC-ODD 321
Controller	MITSUBISHI MELSEC Q
- suitable I/O card	QY81P
Controller	SIEMENS S7-300 / ET 200 M
- suitable I/O card	CPU 313C-2DP
- suitable I/O card	CPU 314C-2DP
- suitable I/O card	CPU 314C-2PtP
- suitable I/O card	6ES7 322-1BH01-0AA0

System connection - PLC-V8/FLK14/OUT - 2295554

Technical data

Supported controller

- suitable I/O card	6ES7 322-1BL00-0AA0
- suitable I/O card	6ES7 323-1BH01-0AA0
- suitable I/O card	6ES7 323-1BL00-0AA0
- suitable I/O card	CPU 313C
- suitable I/O card	CPU 313C-2PtP
Controller	ABB S800 I/O
- suitable I/O card	DO810
- suitable I/O card	DO840
Controller	Emerson DeltaV
- suitable I/O card	VE4002S1T1B3
- suitable I/O card	VE4002S1T2B3
- suitable I/O card	VE4002S1T2B3 Series 2
- suitable I/O card	VE4002S1T2B6
Controller	GE-FANUC RX3i
- suitable I/O card	IC694MDL754
Controller	MITSUBISHI MELSEC L
- suitable I/O card	LY41PT1P
- suitable I/O card	LY42PT1P

classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242208
eCl@ss 7.0	27242208
eCl@ss 8.0	27242208

ETIM

ETIM 2.0	EC001423
ETIM 3.0	EC001423
ETIM 4.0	EC001423
ETIM 5.0	EC001423

UNSPSC


UNSPSC 6.01	30211824
UNSPSC 7.0901	39121402
UNSPSC 11	39121402
UNSPSC 12.01	39121402
UNSPSC 13.2	39121402


System connection - PLC-V8/FLK14/OUT - 2295554


approvals

UL Recognized / UL Listed / cUL Recognized / GOST / cUL Listed / GL / cULus Recognized / cULus Listed /


Approval details

UL Recognized 

UL Listed 


cUL Recognized 

GOST 

cUL Listed 

GL


cULus Recognized 

cULus Listed 

Drawings


System connection - PLC-V8/FLK14/OUT - 2295554

Application drawing

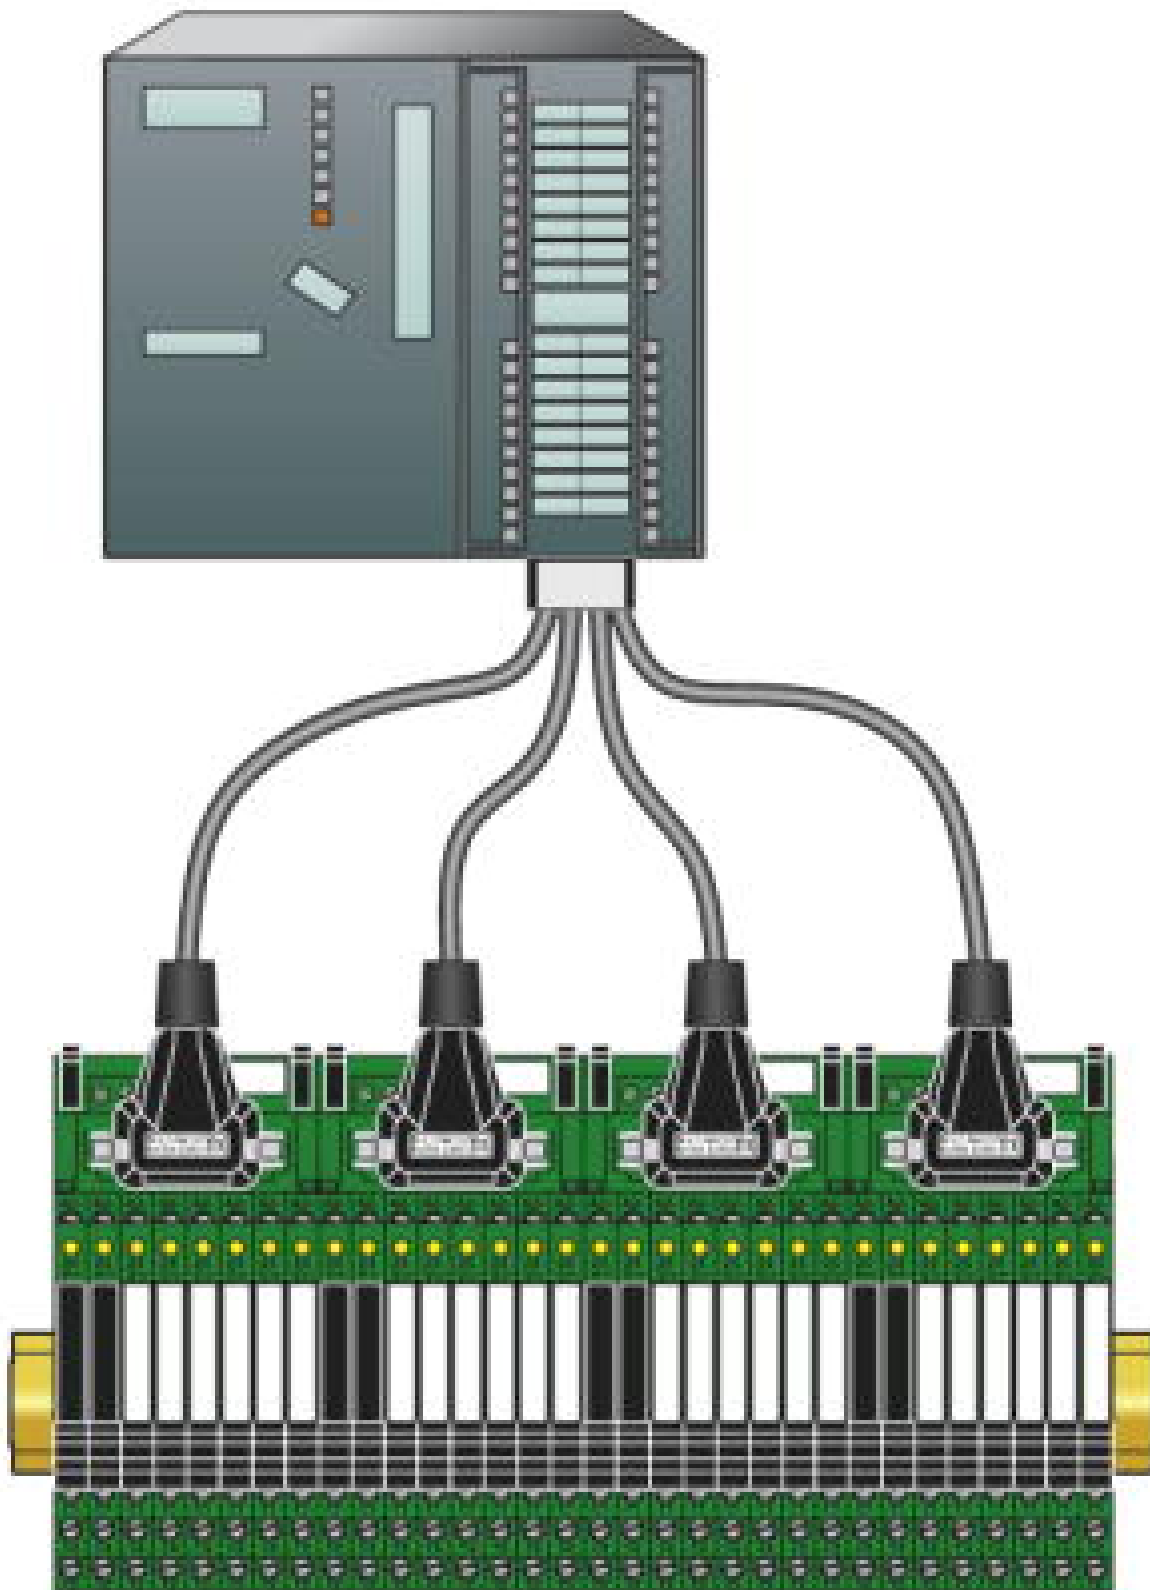

System connection - PLC-V8/FLK14/OUT - 2295554


Application drawing

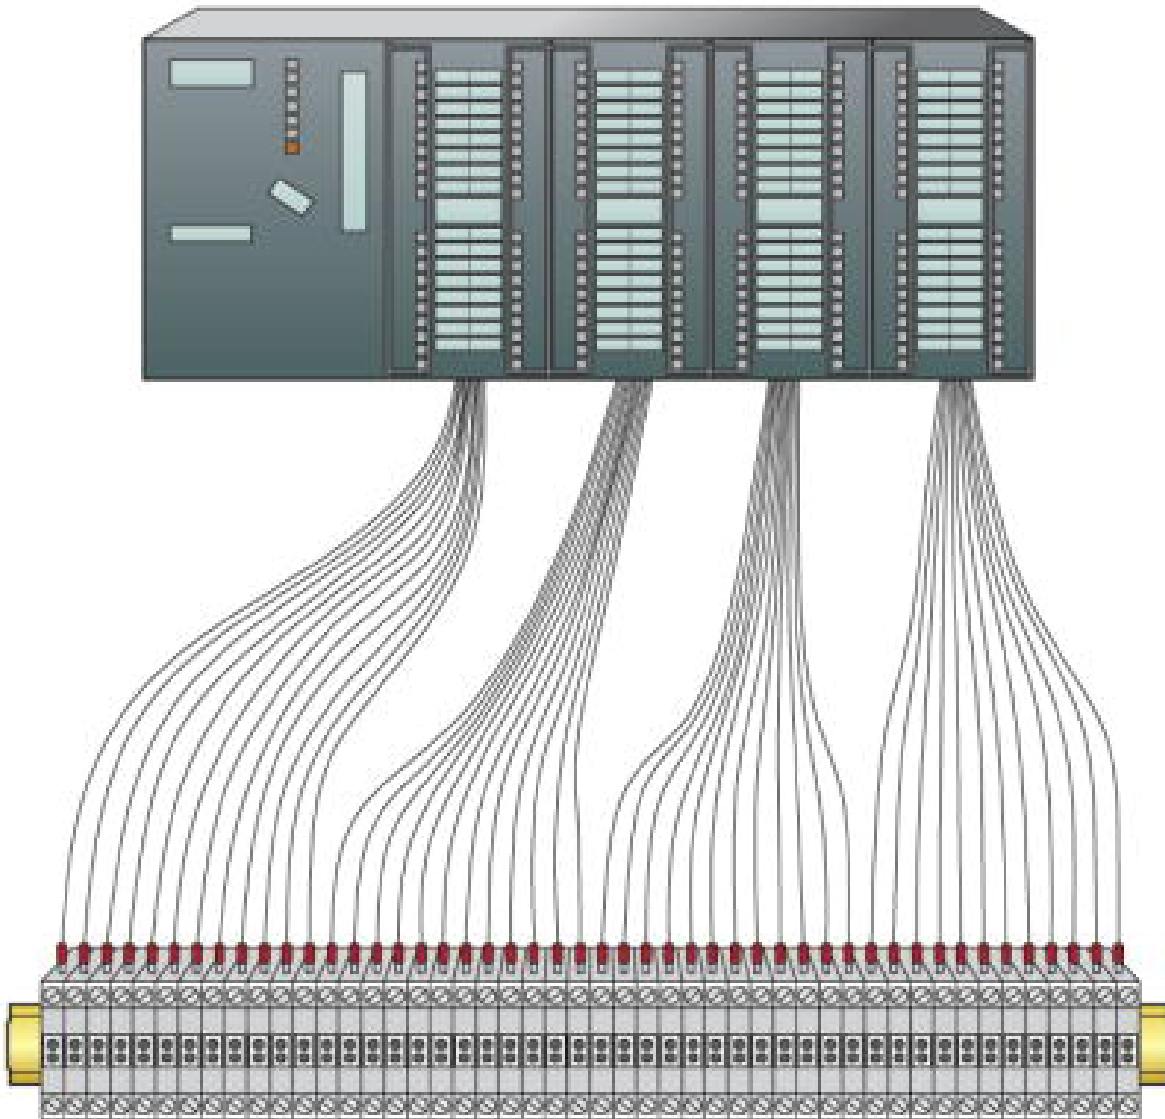

Conventional wiring

System connection - PLC-V8/FLK14/OUT - 2295554

Circuit diagram

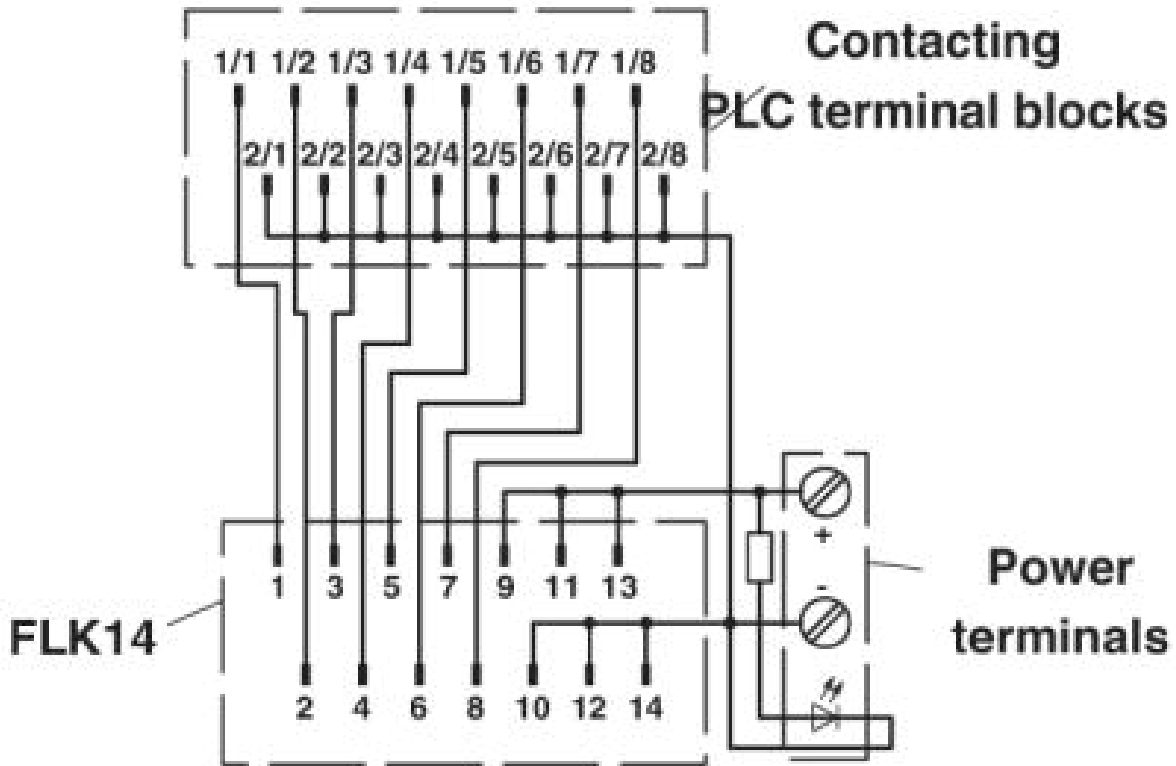

PLC-V8/FLK14/OUT connection scheme

© Phoenix Contact 2014 - all rights reserved
<http://www.phoenixcontact.com>