

# Power supply unit - QUINT-PS/ 1AC/24DC/10 - 2866763

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Primary-switched QUINT power supply for DIN rail mounting, input: 1-phase, output: 24 V DC/10 A, with integrated SFB technology (selective fuse breaking).

## Product Description

QUINT POWER power supply units – Superior system availability with SFB technology Compact power supply units of the new QUINT POWER generation maximize the availability of your system. With the SFB technology (Selective Fuse Breaking Technology), six times the nominal current for 12 ms, even the standard power circuit-breakers can now also be triggered reliably and quickly. Faulty current paths are switched off selectively, the fault is located and important system parts continue to operate. Comprehensive diagnostics are provided through constant monitoring of output voltage and current. This preventive function monitoring visualizes critical operating modes and reports them to the control unit before an error can occur.

## Product Features

- Fast tripping of standard circuit breakers with dynamic power reserve SFB (selective fuse breaking) technology with up to 6 times the nominal current for 12 ms
- For superior system availability
- Reliable starting of difficult loads with the static POWER BOOST power reserve with up to 1.5 times the nominal current permanently
- Preventive function monitoring



## Key commercial data

package_quantity	1
GTIN	4046356113793

## Technical data

### Dimensions

Width	60 mm
Height	130 mm
Depth	125 mm
Width with alternative assembly	122 mm
Height with alternative assembly	130 mm
Depth with alternative assembly	63 mm

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 70 °C (> 60°C derating, startup at -40°C type-tested)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Max. permissible relative humidity (operation)	≤ 95 % (at 25 °C, non-condensing)

# Power supply unit - QUINT-PS/ 1AC/24DC/10 - 2866763

## Technical data

### Ambient conditions

<b>Noise immunity</b>	EN 61000-6-2:2005
-----------------------	-------------------

### Input data

<b>Input voltage range</b>	85 V AC ... 264 V AC
<b>Input voltage range</b>	90 V DC ... 350 V DC (UL 508: ≤ 300 V DC)
<b>Short-term input voltage</b>	300 V AC
<b>AC frequency range</b>	45 Hz ... 65 Hz
<b>Frequency range DC</b>	0 Hz
<b>Current consumption</b>	2.24 A (120 V AC)
<b>Current consumption</b>	1.33 A (230 V AC)
<b>Current consumption</b>	2.45 A (110 V DC)
<b>Current consumption</b>	1.05 A (250 V DC)
<b>Inrush surge current</b>	< 15 A (typical)
<b>Power failure bypass</b>	> 32 ms (120 V AC)
<b>Power failure bypass</b>	> 36 ms (230 V AC)
<b>Input fuse</b>	10 A (slow-blow, internal)
<b>Choice of suitable fuses</b>	10 A ... 16 A (AC: Characteristics B, C, D, K)
<b>Type of protection</b>	Transient surge protection
<b>Protective circuit/component</b>	Varistor, gas-filled surge arrester

### Output data

<b>Nominal output voltage</b>	24 V DC ±1%
<b>Setting range of the output voltage</b>	18 V DC ... 29.5 V DC (> 24 V constant capacity)
<b>Output current</b>	10 A (-25°C ... 60°C, U <sub>OUT</sub> = 24 V DC)
<b>Output current</b>	15 A (with POWER BOOST, -25°C ... 40°C permanently, U <sub>OUT</sub> = 24 V DC)
<b>Output current</b>	60 A (SFB technology, 12 ms)
<b>Output current</b>	15 A (U <sub>in</sub> ≥ 100 V AC, ≥ 110 V DC)
<b>Derating</b>	60 °C ... 70 °C (2.5%/K)
<b>Connection in parallel</b>	Yes, for redundancy and increased capacity
<b>Connection in series</b>	Yes
<b>Control deviation</b>	< 1 % (change in load, static 10 % ... 90 %)
<b>Control deviation</b>	< 2 % (change in load, dynamic 10 % ... 90 %)
<b>Control deviation</b>	< 0.1 % (change in input voltage ±10 %)
<b>Residual ripple</b>	< 50 mV <sub>PP</sub> (with nominal values)
<b>Maximum power dissipation NO-Load</b>	9.1 W
<b>Power loss nominal load max.</b>	22 W

### General

<b>Net weight</b>	1.1 kg
<b>Efficiency</b>	> 92.5 % (for 230 V AC and nominal values)
<b>Insulation voltage input/output</b>	4 kV AC (type test)
<b>Insulation voltage input/output</b>	2 kV AC (routine test)

# Power supply unit - QUINT-PS/ 1AC/24DC/10 - 2866763

## Technical data

### General

<b>Protection class</b>	I
<b>MTBF (IEC 61709, SN 29500)</b>	> 535000 h
<b>Mounting position</b>	horizontal DIN rail NS 35, EN 60715
<b>Assembly instructions</b>	Alignable: 5 mm horizontally, 15 mm next to active components, 50 mm vertically
<b>Electromagnetic compatibility</b>	Conformance with EMC Directive 2004/108/EC
<b>Noise emission</b>	EN 50081-2
<b>Low Voltage Directive</b>	Conformance with LV directive 2006/95/EC
<b>Standard – Electrical equipment of machines</b>	EN 60204
<b>Standard - Electrical safety</b>	IEC 60950-1/VDE 0805 (SELV)
<b>Shipbuilding approval</b>	Germanischer Lloyd (EMC 1), ABS, LR, RINA, NK, DNV, BV
<b>Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations</b>	EN 50178/VDE 0160 (PELV)
<b>Standard – Safety extra-low voltage</b>	IEC 60950-1 (SELV) and EN 60204 (PELV)
<b>Standard - Safe isolation</b>	DIN VDE 0100-410
<b>Standard - Safe isolation</b>	DIN VDE 0106-1010
<b>Standard – Protection against electric shock</b>	DIN 57100-410
<b>Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment</b>	DIN VDE 0106-101
<b>Standard – Limitation of mains harmonic currents</b>	EN 61000-3-2
<b>Standard - Equipment safety</b>	BG (design tested)
<b>Standard - Approval for medical use</b>	IEC 60601
<b>Approval - requirement of the semiconductor industry with regard to mains voltage dips</b>	SEMI F47-0706 Compliance Certificate
<b>Information technology equipment - safety (CB scheme)</b>	CB Scheme
<b>UL approvals</b>	UL Listed UL 508
<b>UL approvals</b>	UL/C-UL Recognized UL 60950
<b>UL approvals</b>	UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location)
<b>Surge voltage category</b>	III
<b>DeviceNet approval</b>	DeviceNet™ Power Supply Conformance Tested

### Connection data, input

<b>Connection method</b>	Pluggable screw connection
<b>Conductor cross section solid min.</b>	0.2 mm <sup>2</sup>
<b>Conductor cross section solid max.</b>	2.5 mm <sup>2</sup>
<b>Conductor cross section stranded min.</b>	0.2 mm <sup>2</sup>
<b>Conductor cross section stranded max.</b>	2.5 mm <sup>2</sup>
<b>Conductor cross section AWG/kcmil min.</b>	16
<b>Conductor cross section AWG/kcmil max</b>	12
<b>Stripping length</b>	7 mm
<b>Screw thread</b>	M3

# Power supply unit - QUINT-PS/ 1AC/24DC/10 - 2866763

## Technical data

### Connection data, output

Connection method	Pluggable screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	2.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	16
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm

### Signaling

Output name	DC OK active
Output description	$U_{OUT} > 0.9 \times U_N$ : High signal
Maximum inrush current	20 mA (short-circuit resistant)
Continuous load current	$\leq 20$ mA
Status display	$U_{OUT} > 0.9 \times U_N$ : "DC OK" LED green
Note on status display	$U_{OUT} < 0.9 \times U_N$ : Flashing "DC OK" LED
Note on status display	$I_{OUT} < I_N$ : LED ON
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	2.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	16
Conductor cross section AWG/kcmil max	12
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Screw thread	M3
Output name	DC OK floating
Output description	Relay contact, $U_{OUT} > 0.9 \times U_N$ : Contact closed
Maximum switching voltage	30 V AC/DC
Maximum switching voltage	24 V DC
Maximum inrush current	$\leq 0.5$ A
Maximum inrush current	1 A
Continuous load current	$\leq 1$ A
Status display	$U_{OUT} > 0.9 \times U_N$ : "DC OK" LED green
Note on status display	$U_{OUT} < 0.9 \times U_N$ : Flashing "DC OK" LED
Output name	POWER BOOST, active
Output description	$I_{OUT} < I_N$ : High signal
Output voltage	+ 24 V DC
Maximum inrush current	20 mA (short-circuit resistant)
Continuous load current	$\leq 20$ mA
Status display	$I_{OUT} > I_N$ : LED "BOOST" yellow

# Power supply unit - QUINT-PS/ 1AC/24DC/10 - 2866763

## classifications

### eCl@ss

eCl@ss 4.0	27040702
eCl@ss 4.1	27040702
eCl@ss 5.0	27049002
eCl@ss 5.1	27049002
eCl@ss 6.0	27049002
eCl@ss 7.0	27049002
eCl@ss 8.0	27049002

### ETIM

ETIM 2.0	EC001039
ETIM 3.0	EC001039
ETIM 4.0	EC000599
ETIM 5.0	EC002540


### UNSPSC

UNSPSC 6.01	30211502
UNSPSC 7.0901	39121004
UNSPSC 11	39121004
UNSPSC 12.01	39121004
UNSPSC 13.2	39121004

## approvals









UL Listed / cUL Listed / UL Listed / cUL Listed / cULus Listed / CSA / UL Recognized / UL Listed / cUL Recognized / GOST / LR / GL / BV / DNV / ABS / NK / RINA / BSH / DeviceNet / IECCEB Scheme / SEMI F47 / Bauartgeprüft / CSA / UL Recognized / UL Listed / cUL Recognized / GOST / LR / GL / BV / DNV / ABS / NK / RINA / BSH / cULus Recognized /

### Approval details



# Power supply unit - QUINT-PS/ 1AC/24DC/10 - 2866763

approvals



# Power supply unit - QUINT-PS/ 1AC/24DC/10 - 2866763

approvals



IECEE CB Scheme

SEMI F47

Bauartgeprüft

## Power supply unit - QUINT-PS/ 1AC/24DC/10 - 2866763

approvals



accessories

### Mounting rail adapter

UTA 107 - 2853983



---

### Assembly adapter

UWA 182/52 - 2938235



---

QUINT-PS-ADAPTERS7/2 - 2938206



---

### Fan

QUINT-PS/FAN/4 - 2320076





## Power supply unit - QUINT-PS/ 1AC/24DC/10 - 2866763

accessories

### Redundancy module

QUINT-DIODE/12-24DC/2X20/1X40 - 2320157



QUINT-ORING/24DC/2X10/1X20 - 2320173



TRIO-DIODE/12-24DC/2X10/1X20 - 2866514



### Thermomagnetic device circuit breakers

CB TM1 1A SFB P - 2800836



CB TM1 2A SFB P - 2800837



## Power supply unit - QUINT-PS/ 1AC/24DC/10 - 2866763

### accessories

CB TM1 3A SFB P - 2800838



CB TM1 4A SFB P - 2800839



CB TM1 5A SFB P - 2800840




### PCB plug

FKC 2,5 HC/ 5-ST-5,08 - 1942400



### accessories

MDSTBA 2,5 HC/ 5-G-5,08 5CR - 1724750



# Power supply unit - QUINT-PS/ 1AC/24DC/10 - 2866763

accessories

MSTB 2,5 HC/ 5-ST-5,08 BD:-,13 - 1723751




MSTB 2,5 HC/ 5-ST-5,08 BD:+,OK - 1723764




## Drawings

Application drawing

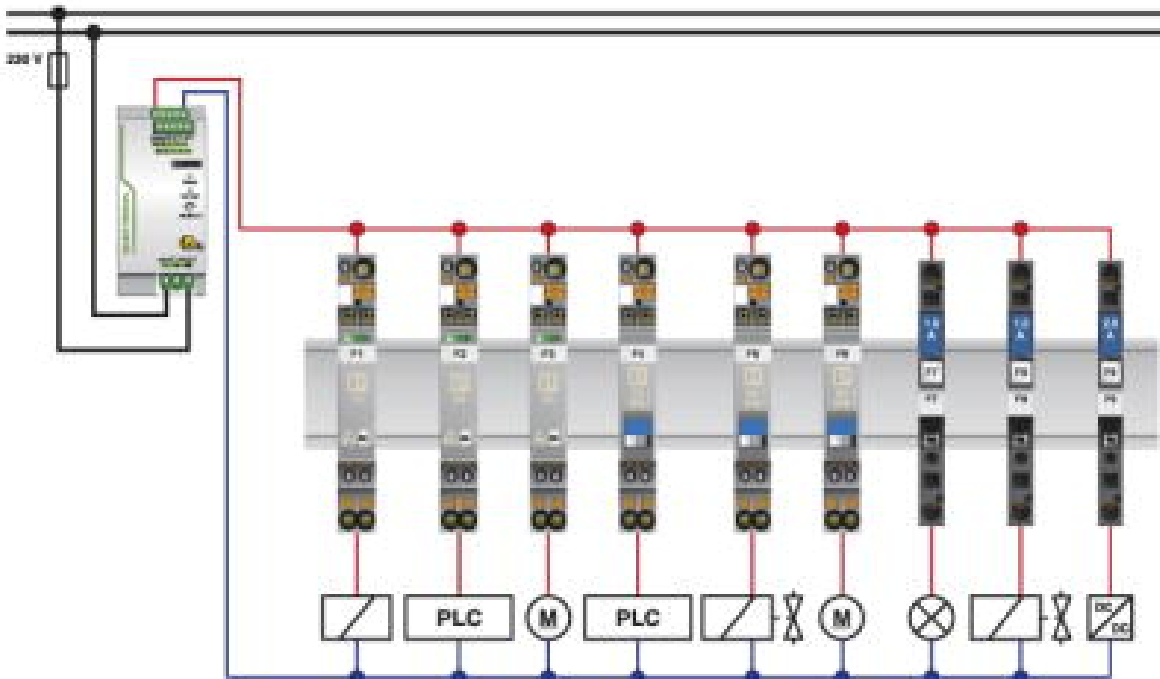

# Power supply unit - QUINT-PS/ 1AC/24DC/10 - 2866763

Application drawing

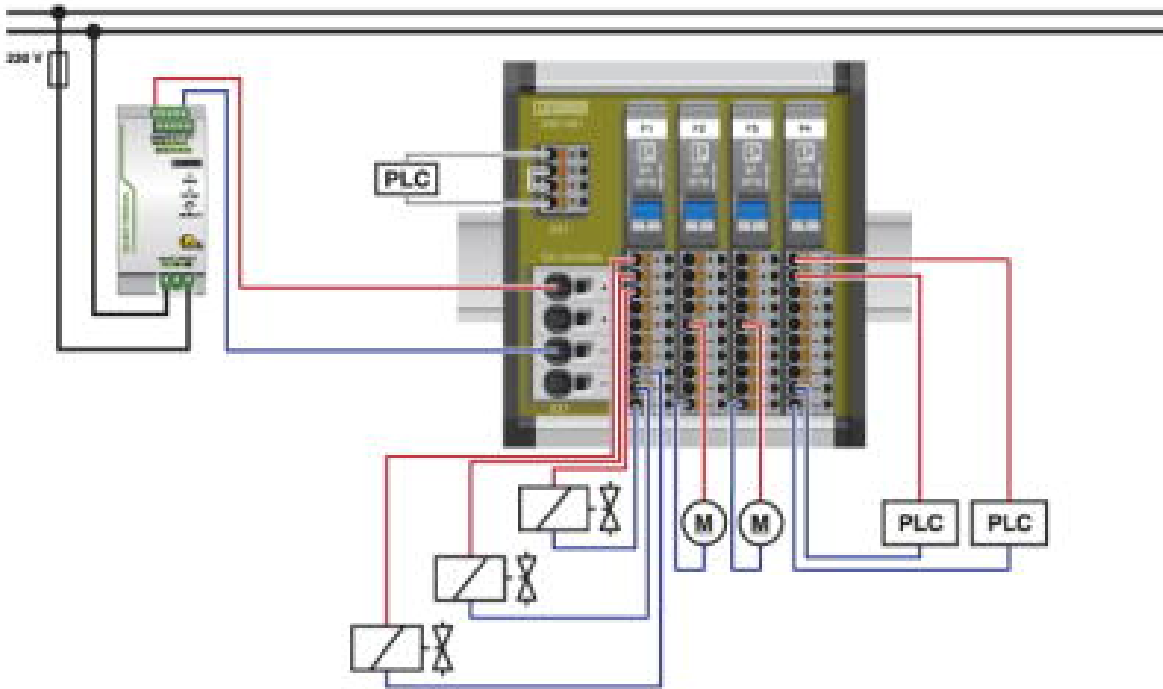

Block diagram

