

Signal conditioner - MACX MCR-UI-UI-UP-NC - 2811297

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Isolating amplifier with safe electrical isolation and wide-range power supply (24 V ... 230 V AC/DC). DIP switches on the front, over 1600 signal conversions can be set. Standard configuration (IN 0 ... 10 V/OUT 0 ... 20 mA), screw connection, SIL.

Product Features

- Over 1600 signal conversions can be set via DIP switches on the front
- Up to SIL 2 according to EN 61508
- Installation in zone 2 permitted
- Analog signal conditioner for isolating, filtering, amplifying, and converting standard analog signals
- Configurable input and output signals including bipolar current and voltage signals
- Status indicator for supply voltage
- Wide-range power supply of 19.2 ... 253 V AC/DC
- Plug-in screw or spring-cage connection technology (Push-in technology)
- 3-way electrical isolation
- Active or passive output



Key commercial data

package_quantity	1
GTIN	4046356288910

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	12.5 mm
Height	99 mm
Depth	114.5 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Maximum altitude	≤ 2000 m

Signal conditioner - MACX MCR-UI-UI-UP-NC - 2811297

Technical data

Ambient conditions

Degree of protection	IP20
----------------------	------

Input data

Voltage input signal	0 mV ... 50 mV
Voltage input signal	0 mV ... 60 mV
Voltage input signal	0 mV ... 75 mV
Voltage input signal	0 mV ... 100 mV
Voltage input signal	0 mV ... 120 mV
Voltage input signal	0 mV ... 150 mV
Voltage input signal	0 mV ... 200 mV
Voltage input signal	0 mV ... 300 mV
Voltage input signal	0 mV ... 500 mV
Voltage input signal	0 V ... 1 V
Voltage input signal	0 V ... 1.5 V
Voltage input signal	0 V ... 2 V
Voltage input signal	0 V ... 3 V
Voltage input signal	0 V ... 5 V
Voltage input signal	0 V ... 10 V (Configurable via DIP switches)
Voltage input signal	0 V ... 15 V
Voltage input signal	0 V ... 20 V
Voltage input signal	0 V ... 30 V
Voltage input signal	0 V ... 50 V
Voltage input signal	0 V ... 100 V
Voltage input signal	-50 mV ... 50 mV
Voltage input signal	-60 mV ... 60 mV
Voltage input signal	-75 mV ... 75 mV
Voltage input signal	-100 mV ... 100 mV
Voltage input signal	-120 mV ... 120 mV
Voltage input signal	-150 mV ... 150 mV
Voltage input signal	-200 mV ... 200 mV
Voltage input signal	-300 mV ... 300 mV
Voltage input signal	-500 mV ... 500 mV
Voltage input signal	-1 V ... 1 V
Voltage input signal	-1.5 V ... 1.5 V
Voltage input signal	-2 V ... 2 V
Voltage input signal	-3 V ... 3 V
Voltage input signal	-5 V ... 5 V
Voltage input signal	-10 V ... 10 V
Voltage input signal	-15 V ... 15 V
Voltage input signal	-20 V ... 20 V
Voltage input signal	-30 V ... 30 V
Voltage input signal	-50 V ... 50 V

Signal conditioner - MACX MCR-UI-UI-UP-NC - 2811297

Technical data

Input data

Voltage input signal	-100 V ... 100 V
Voltage input signal	1 V ... 5 V
Voltage input signal	2 V ... 10 V
Current input signal	0 mA ... 1 mA (Configurable via DIP switches)
Current input signal	0 mA ... 1.5 mA
Current input signal	0 mA ... 2 mA
Current input signal	0 mA ... 3 mA
Current input signal	0 mA ... 5 mA
Current input signal	0 mA ... 10 mA
Current input signal	0 mA ... 15 mA
Current input signal	0 mA ... 20 mA
Current input signal	0 mA ... 30 mA
Current input signal	0 mA ... 50 mA
Current input signal	0 mA ... 100 mA
Current input signal	-1 mA ... 1 mA
Current input signal	-1.5 mA ... 1.5 mA
Current input signal	-2 mA ... 2 mA
Current input signal	-3 mA ... 3 mA
Current input signal	-5 mA ... 5 mA
Current input signal	-10 mA ... 10 mA
Current input signal	-15 mA ... 15 mA
Current input signal	-20 mA ... 20 mA
Current input signal	-30 mA ... 30 mA
Current input signal	-50 mA ... 50 mA
Current input signal	-100 mA ... 100 mA
Current input signal	1 mA ... 5 mA
Current input signal	2 mA ... 10 mA
Current input signal	4 mA ... 20 mA
Max. input voltage	± 100 V
Max. input current	± 100 mA
Input resistance of voltage input	approx. 1 MΩ (± 1 V DC ... ± 100 V DC)
Input resistance current input	approx. 10 Ω (± 10 mA DC ... ± 100 mA DC)

Output data

Configurable/programmable	Yes, can be switched
Voltage output signal	0 V ... 10 V (Configurable via DIP switches)
Voltage output signal	0 V ... 5 V
Voltage output signal	2 V ... 10 V
Voltage output signal	1 V ... 5 V
Voltage output signal	-10 V ... 10 V
Voltage output signal	-5 V ... 5 V
Voltage output signal	0 V ... 2.5 V

Signal conditioner - MACX MCR-UI-UI-UP-NC - 2811297

Technical data

Output data

Voltage output signal	0.5 V ... 2.5 V
Voltage output signal	-2.5 V ... 2.5 V
Current output signal	0 mA ... 5 mA
Current output signal	0 mA ... 10 mA
Current output signal	0 mA ... 20 mA (Configurable via DIP switches)
Current output signal	1 mA ... 5 mA
Current output signal	2 mA ... 10 mA
Current output signal	4 mA ... 20 mA
Current output signal	-5 mA ... 5 mA
Current output signal	-10 mA ... 10 mA
Current output signal	-20 mA ... 20 mA
Max. output voltage	15 V
Max. output current	35 mA
Load/output load voltage output	≥ 1 kΩ (10 V)
Load/output load current output	≤ 600 Ω (20 mA; active)
Load/output load current output	passive: ≤ (UB-2 V) / I _{outmax}

Power supply

Supply voltage range	24 V ... 230 V AC/DC (-20%/+10%, 50/60 Hz)
----------------------	--

Connection data

Connection method	Pluggable screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Stripping length	8 mm
Screw thread	M3
Connection method	COMBICON

General

Maximum transmission error	≤ 0.1 % (Compared to the final value)
Maximum temperature coefficient	0.0075 %/K
Limit frequency (3 dB)	10 kHz (Can be switched to 30 Hz)
Alignment zero	± 4 %
Alignment span	± 4 %
Step response (10-90%)	35 μs (at 10 kHz)
Step response (10-90%)	11 ms (At 30 Hz)
Protective circuit	Transient protection
Surge voltage category	II
Pollution degree	2

Signal conditioner - MACX MCR-UI-UI-UP-NC - 2811297

Technical data

General

Rated insulation voltage	300 V AC
Color	green
Housing material	PA 66-FR
Mounting position	any
Conformance	CE-compliant
ATEX	# II 3 G Ex nA IIC T4 Gc
IECEX	Ex nA IIC T4 Gc
Functional Safety (SIL)	SIL 2

Safety characteristic data

Integrity requirement	IEC 61508 - Low demand
Designation	Input isolator (live zero signals)
Architecture	Single-channel, 1oo1
Equipment type	Type A
Safety Integrity Level (SIL)	Up to 2
Safe Failure Fraction (SFF)	85.9 %
MTBF	231 Years
λ_{SU}	3.7×10^{-7} (370 FIT)
λ_{SD}	0
λ_{DU}	6×10^{-8} (60 FIT)
λ_{DD}	0
Probability of a hazardous failure on demand (PFD_{AVG})	2.7×10^{-4} (1 year)
Diagnostic coverage (DC)	0 %
Integrity requirement	IEC 61508 - Low demand
Designation	Output isolator (live zero signals)
Architecture	Single-channel, 1oo1
Equipment type	Type A
Safety Integrity Level (SIL)	Up to 2
Safe Failure Fraction (SFF)	82.7 %
MTBF	233 Years
λ_{SU}	3.5×10^{-7} (350 FIT)
λ_{SD}	0
λ_{DU}	7.3×10^{-8} (73 FIT)
λ_{DD}	0
Probability of a hazardous failure on demand (PFD_{AVG})	3.2×10^{-4} (1 year)
Diagnostic coverage (DC)	0 %
Integrity requirement	IEC 61508 - High demand
Designation	Input isolator (live zero signals)
Architecture	Single-channel, 1oo1
Equipment type	Type A
Safety Integrity Level (SIL)	Up to 2

Signal conditioner - MACX MCR-UI-UI-UP-NC - 2811297

Technical data

Safety characteristic data

Safe Failure Fraction (SFF)	85.9 %
MTBF	231 Years
λ_{SU}	3.7×10^{-7} (370 FIT)
λ_{SD}	0
λ_{DU}	5.97×10^{-8} (59.7 FIT)
λ_{DD}	0
Probability of a hazardous failure per hour (PFH _D)	6.0×10^{-8}
Diagnostic coverage (DC)	0 %
Integrity requirement	IEC 61508 - High demand
Designation	Output isolator (live zero signals)
Architecture	Single-channel, 1oo1
Equipment type	Type A
Safety Integrity Level (SIL)	Up to 2
Safe Failure Fraction (SFF)	82.7 %
MTBF	233 Years
λ_{SU}	3.5×10^{-7} (350 FIT)
λ_{SD}	0
λ_{DU}	7.3×10^{-8} (73 FIT)
λ_{DD}	0
Probability of a hazardous failure per hour (PFH _D)	7.3×10^{-8}
Diagnostic coverage (DC)	0 %

classifications

eCl@ss

eCl@ss 4.0	27210120
eCl@ss 4.1	27210120
eCl@ss 5.0	27210120
eCl@ss 5.1	27210120
eCl@ss 6.0	27210120
eCl@ss 7.0	27210120
eCl@ss 8.0	27210120

ETIM

ETIM 2.0	EC001485
ETIM 3.0	EC001485
ETIM 4.0	EC002653
ETIM 5.0	EC002653

UNSPSC

UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008

Signal conditioner - MACX MCR-UI-UI-UP-NC - 2811297

classifications

UNSPSC

UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	39121008

approvals

IECEX / ATEX / UL Listed / cUL Listed / cULus Listed / UL Listed / cUL Listed / GL / Functional Safety / cULus Listed /

Approval details

IECEX

ATEX

UL Listed

cUL Listed

cULus Listed

GL

Functional Safety


Signal conditioner - MACX MCR-UI-UI-UP-NC - 2811297

approvals




Drawings

Application drawing

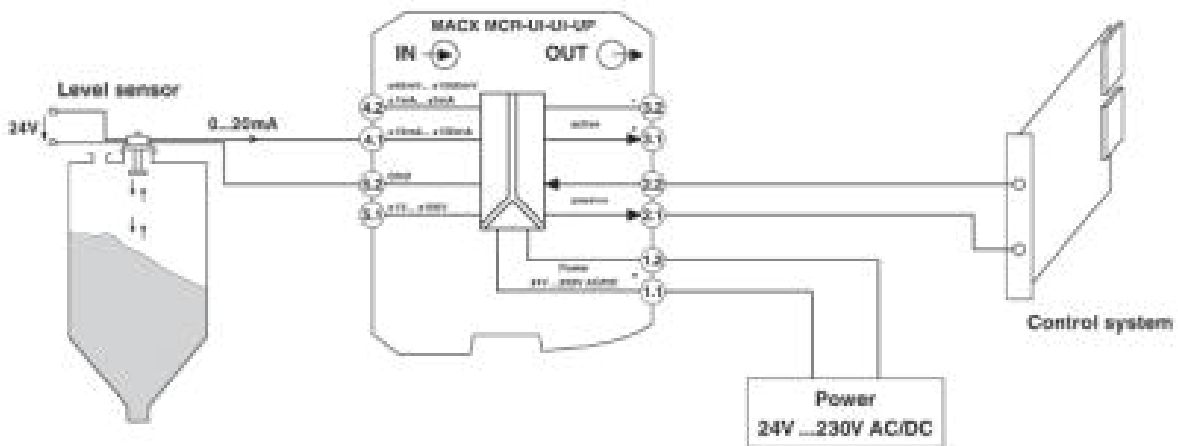

Level measurement with analog input terminals (active input card)


Application drawing

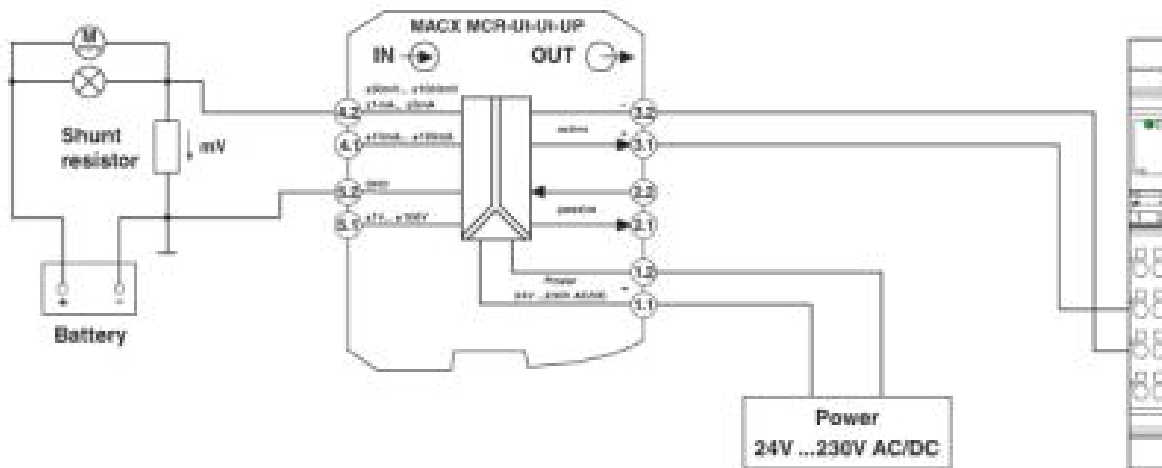

Shunt measurement and Inline terminal with analog input channels within an Inline station (passive input card)


Signal conditioner - MACX MCR-UI-UI-UP-NC - 2811297

Block diagram

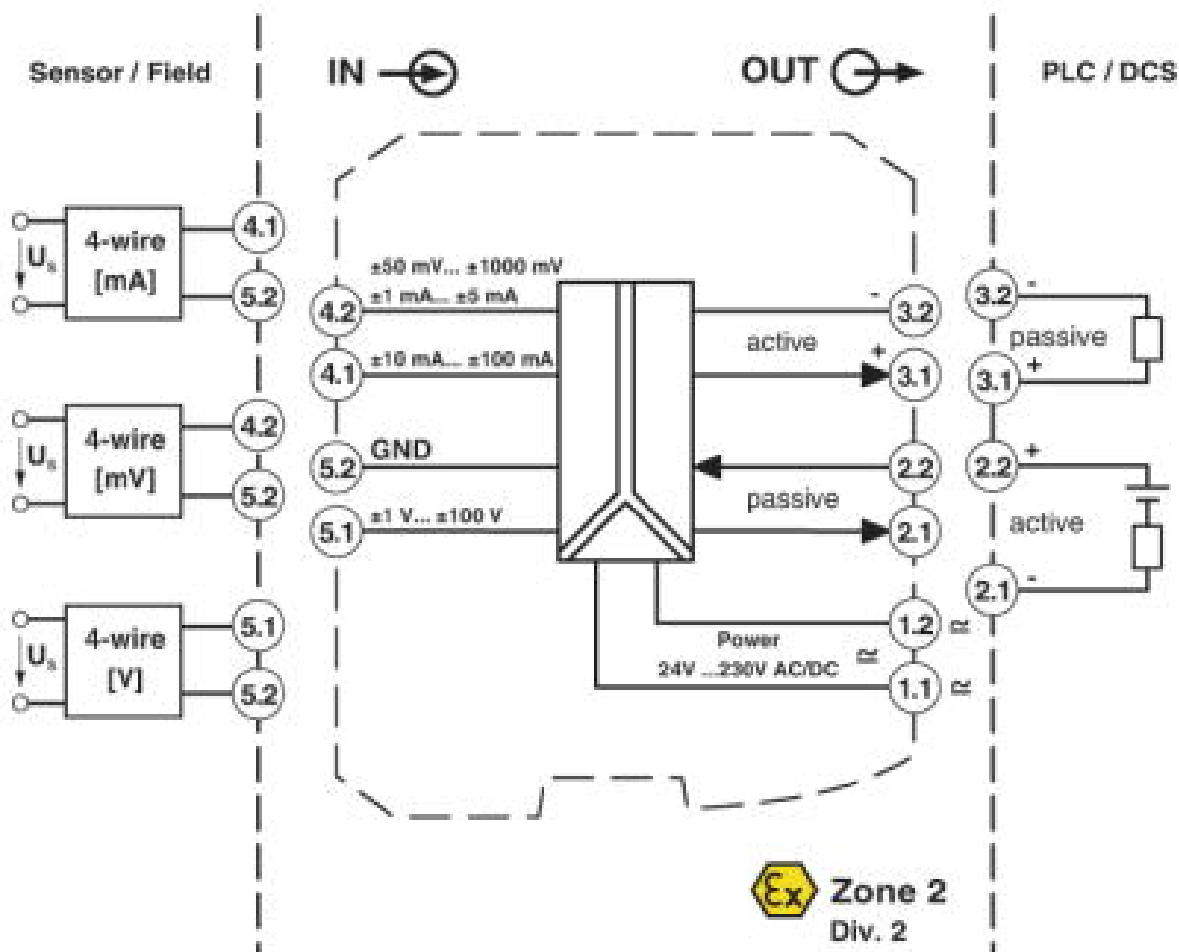

Signal conditioner - MACX MCR-UI-UI-UP-NC - 2811297

Dimensioned drawing

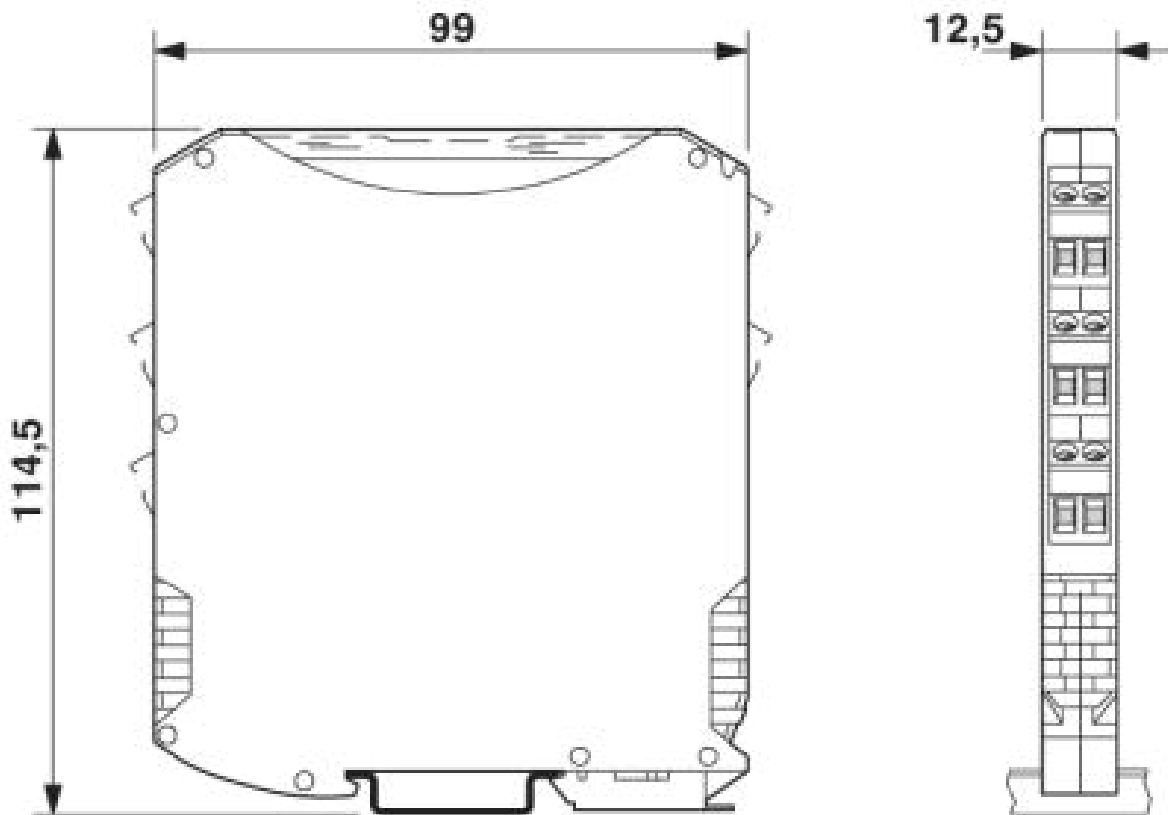

© Phoenix Contact 2014 - all rights reserved
<http://www.phoenixcontact.com>