

Electronic terminal block - EIK1-SVN-24P - 2940799

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Switching amplifier electronic terminal block, for inductive proximity sensors acc. to NAMUR, with light indicators for sensor signal and faults

Product Features

- Bridging and labeling with standard terminal block accessories
- Error indication via LED
- Monitoring of initiator side for short circuits or wire breaks
- Status indication (high signal) via green LED
- Suitable resistance circuit to enable monitoring of mechanical switches
- 24 V/50 mA digital output



Key commercial data

package_quantity	10
GTIN	4017918080242

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	6.2 mm
Height	80 mm
Depth	56 mm

Ambient conditions

Ambient temperature (operation)	-25 °C ... 50 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C

Input data

Designation	Supply
Input voltage range	18.5 V DC ... 28.8 V DC (U_{VN} , see derating curve)
Typical input current at U_N	70 mA
Max. current consumption	70 mA (at 50 mA output current)

Electronic terminal block - EIK1-SVN-24P - 2940799

Technical data

Input data

Operating voltage display	Green LED
Type of protection	Protection against polarity reversal
Protective circuit/component	Polarity protection diode
Transmission frequency	1 kHz
Designation	Control circuit
Nominal input voltage U_N	8.2 V DC $\pm 10\%$
Indication	visual short-circuit and wire break control with LED (red)
Type of protection	12 V Zener diode
Protective circuit/component	12 V Zener diode
Transmission frequency	1 kHz
Switching point	≥ 2.1 mA (In conductive state)
Switching point	≤ 1.2 mA (In blocking state)
Switching point	6.3 mA ... 10 mA (in the event of a short-circuit)
Switching point	0 mA ... 0.35 mA (In the event of a wire break)
Switching hysteresis	approx. 0.2 mA
Internal resistance	approx. 1 k Ω

Output data

Designation	Signal output
Output nominal voltage	≤ 100 mV (In conductive state)
Output nominal voltage	$U_{VN} - U_{Ri}$; in blocking state
Limiting continuous current	50 mA
Voltage drop at max. limiting continuous current	≤ 1.5 V (U_R)
Type of protection	36 V Zener diode as free-wheeling diode
Protective circuit/component	36 V Zener diode as free-wheeling diode

Connection data

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

General

Mounting position	any
Assembly instructions	In rows with zero spacing
Designation	Air and creepage distances
Standards/regulations	IEC 60664
Standards/regulations	EN 61000-6-2

Electronic terminal block - EIK1-SVN-24P - 2940799

Technical data

General

Standards/regulations	EN 61000-6-4
Pollution degree	2
Surge voltage category	III

classifications

eCl@ss

eCl@ss 4.0	27371102
eCl@ss 4.1	27371102
eCl@ss 5.0	27371001
eCl@ss 5.1	27371001
eCl@ss 6.0	27371001
eCl@ss 7.0	27371001
eCl@ss 8.0	27371001

ETIM

ETIM 2.0	EC001437
ETIM 3.0	EC001437
ETIM 4.0	EC001437
ETIM 5.0	EC001437

UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121515
UNSPSC 11	39121515
UNSPSC 12.01	39121515
UNSPSC 13.2	39121515

approvals

GOST /

Approval details



accessories

Partition plate

Electronic terminal block - EIK1-SVN-24P - 2940799

accessories

D-DEK 1,5 GN - 2716949



Sensor/actuator terminal block

DIKD 1,5 - 2715979



Terminal marking

ZB 6:UNBEDRUCKT - 1051003



ZB 6/WH-100:UNBEDRUCKT - 5060935



Labeled terminal marker

ZB 6,LGS:FORTL.ZAHLEN - 1051016



Electronic terminal block - EIK1-SVN-24P - 2940799

accessories

Bridge

EB 2- DIK RD - 2716693



EB 3- DIK RD - 2716745



EB 4- DIK RD - 2716758



EB 5- DIK RD - 2716761



EB 10- DIK RD - 2716774



Electronic terminal block - EIK1-SVN-24P - 2940799

accessories

EB 2- DIK BU - 2716648



EB 3- DIK BU - 2716651



EB 4- DIK BU - 2716664



EB 5- DIK BU - 2716677



EB 10- DIK BU - 2716680



EB 80- DIK BU - 2715940



Electronic terminal block - EIK1-SVN-24P - 2940799

accessories

EB 80- DIK RD - 2715953




EB 80- DIK WH - 2715788



Drawings


Application drawing

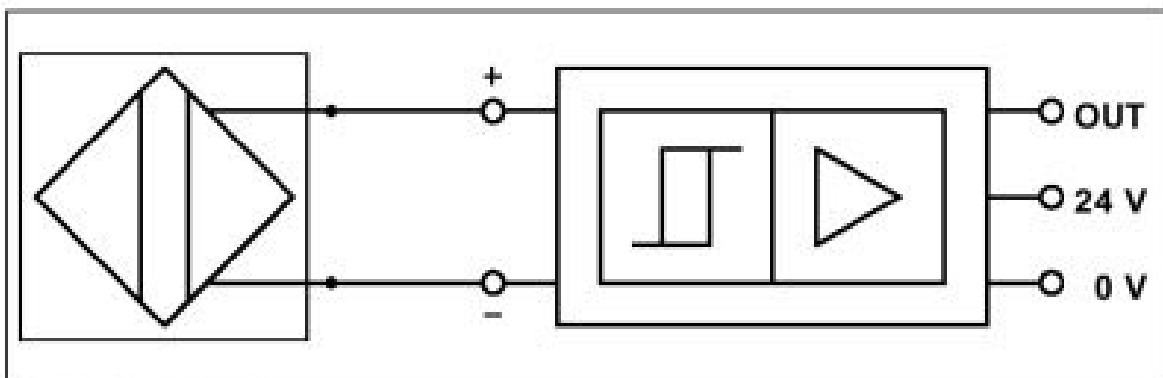

NAMUR initiator


Electronic terminal block - EIK1-SVN-24P - 2940799

Application drawing

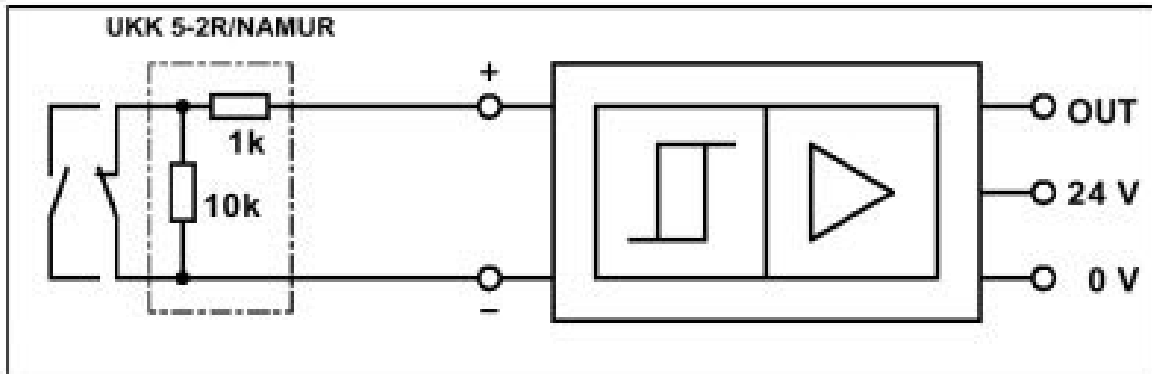


Limit switch

Application drawing

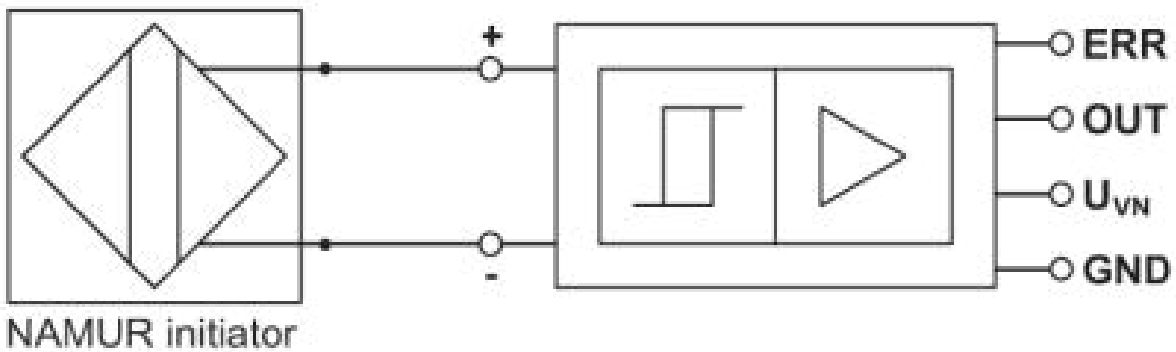

NAMUR initiator


Application drawing

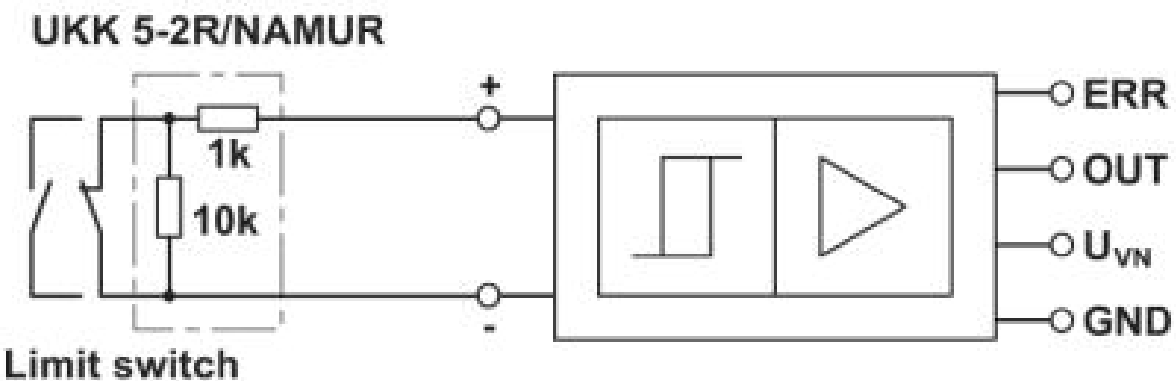

Limit switch


Electronic terminal block - EIK1-SVN-24P - 2940799

Diagram

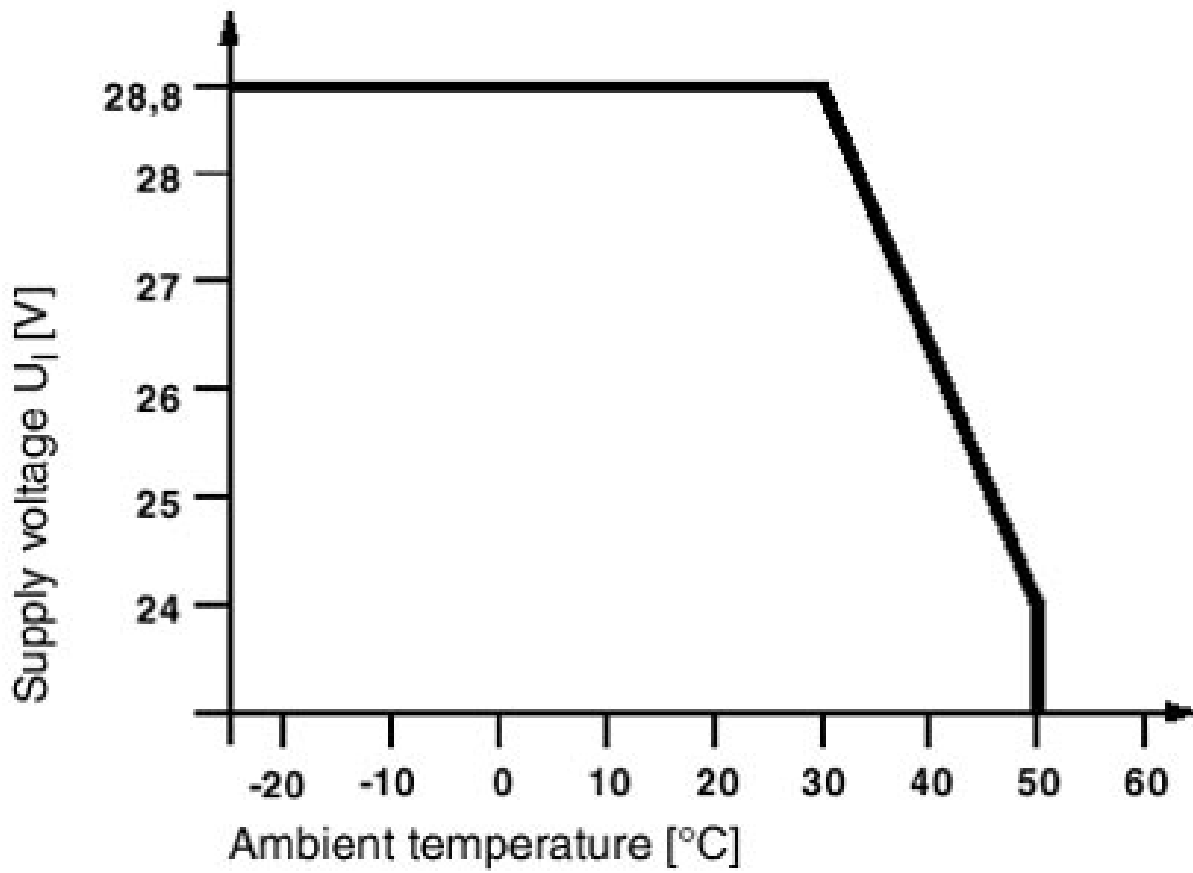

Electronic terminal block - EIK1-SVN-24P - 2940799

Diagram

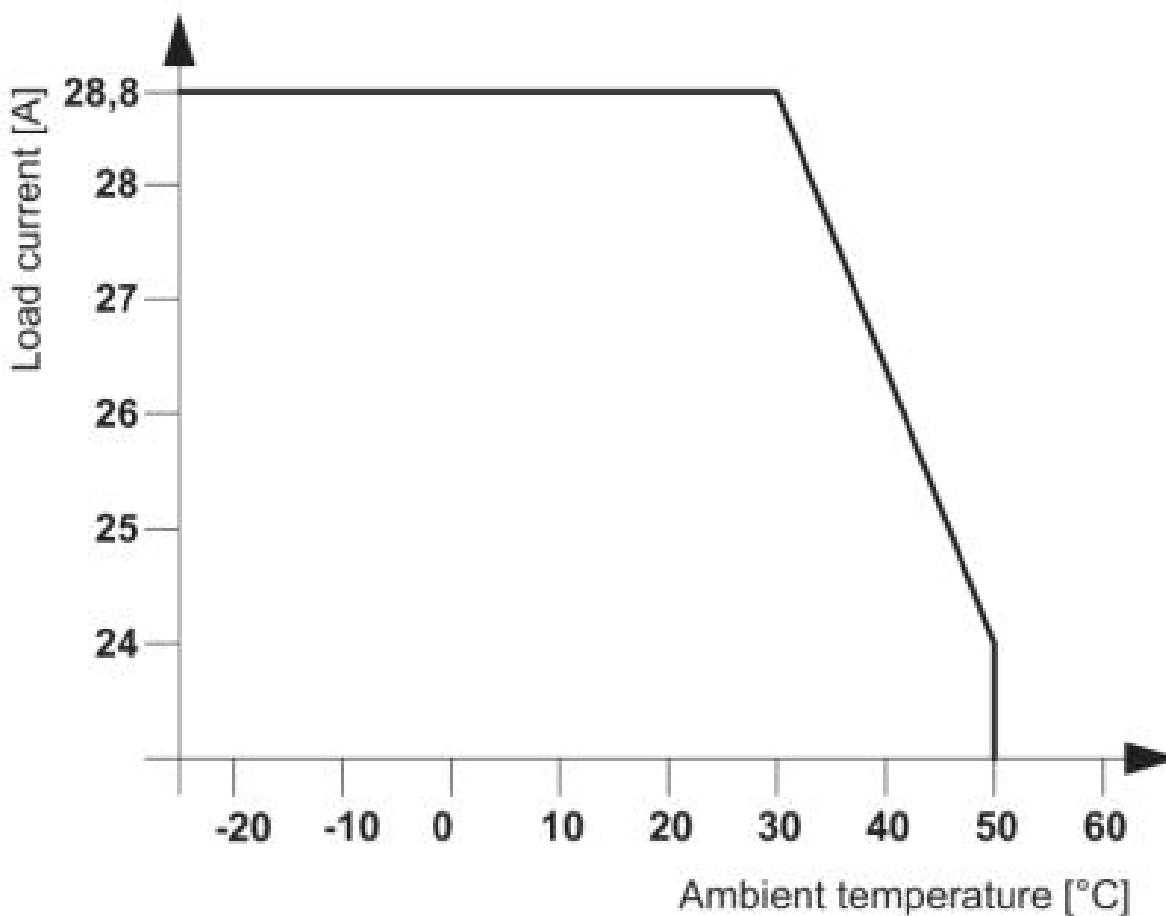

Circuit diagram

