

# Relay Module - PLC-RSC- 24DC/21 - 2966171

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



PLC relay, consisting of base terminal block PLC-BSC.../21 with screw connection and pluggable miniature relay with power contact, for assembly on DIN rail NS 35/7.5, 1 PDT, input voltage 24 V DC

## Product Features

- Slim design
- Efficient connection to system cabling using V8 adapter
- Safe isolation according to DIN EN 50178 between coil and contact
- RT III sealed relay
- Functional plug-in bridges
- Integrated input circuit and interference suppression circuit



## Key commercial data

package_quantity	10
GTIN	4017918130732

## Technical data

### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

### Dimensions

Width	6.2 mm
Height	80 mm
Depth	94 mm

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

### Coil side

Nominal input voltage $U_N$	24 V DC
Typical input current at $U_N$	9 mA
Typical response time	5 ms
Typical release time	8 ms

# Relay Module - PLC-RSC- 24DC/21 - 2966171

## Technical data

### Coil side

<b>Operating voltage display</b>	Yes
<b>Protective circuit</b>	Protection against polarity reversal Polarity protection diode
<b>Protective circuit</b>	Free-wheeling diode Damping diode

### Contact side

<b>Contact type</b>	1 PDT
<b>Contact material</b>	AgSnO
<b>Maximum switching voltage</b>	250 V AC/DC (The separating plate PLC-ATP should be installed for voltages larger than 250 V (L1, L2, L3) between identical terminal blocks in adjacent modules. Potential bridging is then carried out with FBST 8-PLC... or ...FBST 500...)
<b>Minimum switching voltage</b>	5 V (at 100 mA)
<b>Maximum inrush current</b>	on request
<b>Min. switching current</b>	10 mA (at 12 V)
<b>Limiting continuous current</b>	6 A
<b>Interrupting rating (ohmic load) max.</b>	140 W (at 24 V DC)
<b>Interrupting rating (ohmic load) max.</b>	20 W (at 48 V DC)
<b>Interrupting rating (ohmic load) max.</b>	18 W (at 60 V DC)
<b>Interrupting rating (ohmic load) max.</b>	23 W (at 110 V DC)
<b>Interrupting rating (ohmic load) max.</b>	40 W (at 220 V DC)
<b>Interrupting rating (ohmic load) max.</b>	1500 VA (for 250 V AC)
<b>Switching capacity in acc. with DIN VDE 0660/IEC 60947</b>	2 A (at 24 V, DC13)
<b>Switching capacity in acc. with DIN VDE 0660/IEC 60947</b>	0.2 A (at 110 V, DC13)
<b>Switching capacity in acc. with DIN VDE 0660/IEC 60947</b>	0.1 A (at 220 V, DC13)
<b>Switching capacity in acc. with DIN VDE 0660/IEC 60947</b>	3 A (at 24 V, AC15)
<b>Switching capacity in acc. with DIN VDE 0660/IEC 60947</b>	3 A (at 120 V, AC15)
<b>Switching capacity in acc. with DIN VDE 0660/IEC 60947</b>	3 A (at 230 V, AC15)

### General

<b>Test voltage relay winding/relay contact</b>	4 kV AC (50 Hz, 1 min.)
<b>Operating mode</b>	100% operating factor
<b>Mechanical service life</b>	2 x 10 <sup>7</sup> cycles
<b>Inflammability class according to UL 94</b>	V0
<b>Designation</b>	Standards/regulations
<b>Standards/regulations</b>	IEC 60664
<b>Standards/regulations</b>	EN 50178
<b>Standards/regulations</b>	IEC 62103
<b>Pollution degree</b>	3
<b>Surge voltage category</b>	III
<b>Mounting position</b>	any
<b>Assembly instructions</b>	In rows with zero spacing

### Connection data

<b>Connection method</b>	Screw connection
--------------------------	------------------

# Relay Module - PLC-RSC- 24DC/21 - 2966171

## Technical data

### Connection data

Stripping length	8 mm
Conductor cross section stranded min.	0.14 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section solid min.	0.14 mm <sup>2</sup>
Conductor cross section solid max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil max	14
Conductor cross section AWG/kcmil min.	26
Screw thread	M3

## classifications

### eCl@ss

eCl@ss 4.0	27371102
eCl@ss 4.1	27371102
eCl@ss 5.0	27371001
eCl@ss 5.1	27371001
eCl@ss 6.0	27371001
eCl@ss 7.0	27371001
eCl@ss 8.0	27371001

### ETIM

ETIM 2.0	EC000196
ETIM 3.0	EC000196
ETIM 4.0	EC000196
ETIM 5.0	EC000196

### UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121515
UNSPSC 11	39121515
UNSPSC 12.01	39121515
UNSPSC 13.2	39121515

## approvals

---

UL Recognized / UL Listed / cUL Recognized / GOST / cUL Listed / GL / UL Listed / cUL Listed / cULus Recognized / cULus Listed /








---

### Approval details



# Relay Module - PLC-RSC- 24DC/21 - 2966171

approvals



accessories

**Mounting rail**

NS 35/ 7,5 V2A UNPERF 2000MM - 0801377



## Relay Module - PLC-RSC- 24DC/21 - 2966171

accessories

---

NS 35/ 7,5 PERF 2000MM - 0801733



NS 35/ 7,5 CU UNPERF 2000MM - 0801762



NS 35/15 UNPERF 2000MM - 1201714



NS 35/15 CU UNPERF 2000MM - 1201895



NS 35/15-2,3 UNPERF 2000MM - 1201798



## Relay Module - PLC-RSC- 24DC/21 - 2966171

### accessories

NS 35/15 AL UNPERF 2000MM - 1201756



---

NS 35/15 PERF 2000MM - 1201730



---

NS 35/ 7,5 UNPERF 2000MM - 0801681



---

### Power module

PLC-ESK GY - 2966508



---

### Partition plate

PLC-ATP BK - 2966841



---

### Screwdriver tools

# Relay Module - PLC-RSC- 24DC/21 - 2966171

## accessories

SZF 1-0,6X3,5 - 1204517



---

## Controller board

PLC-V8/FLK14/OUT - 2295554



---

PLC-V8/FLK14/OUT/M - 2304102



---

PLC-V8/D15S/OUT - 2296058



---

PLC-V8/D15B/OUT - 2296061



---

## Terminal marking

## Relay Module - PLC-RSC- 24DC/21 - 2966171

### accessories

ZB 6:UNBEDRUCKT - 1051003



ZB 6/WH-100:UNBEDRUCKT - 5060935



### Labeled terminal marker

ZB 6,LGS:FORTL.ZAHLEN - 1051016



### Bridge

FBST 500-PLC RD - 2966786



FBST 500-PLC BU - 2966692





## Relay Module - PLC-RSC- 24DC/21 - 2966171

### accessories

FBST 500-PLC GY - 2966838



---

FBST 6-PLC RD - 2966236



---

FBST 6-PLC BU - 2966812



---

FBST 6-PLC GY - 2966825



---

FBST 8-PLC GY - 2967688




---

### Drawings

# Relay Module - PLC-RSC- 24DC/21 - 2966171


Diagram

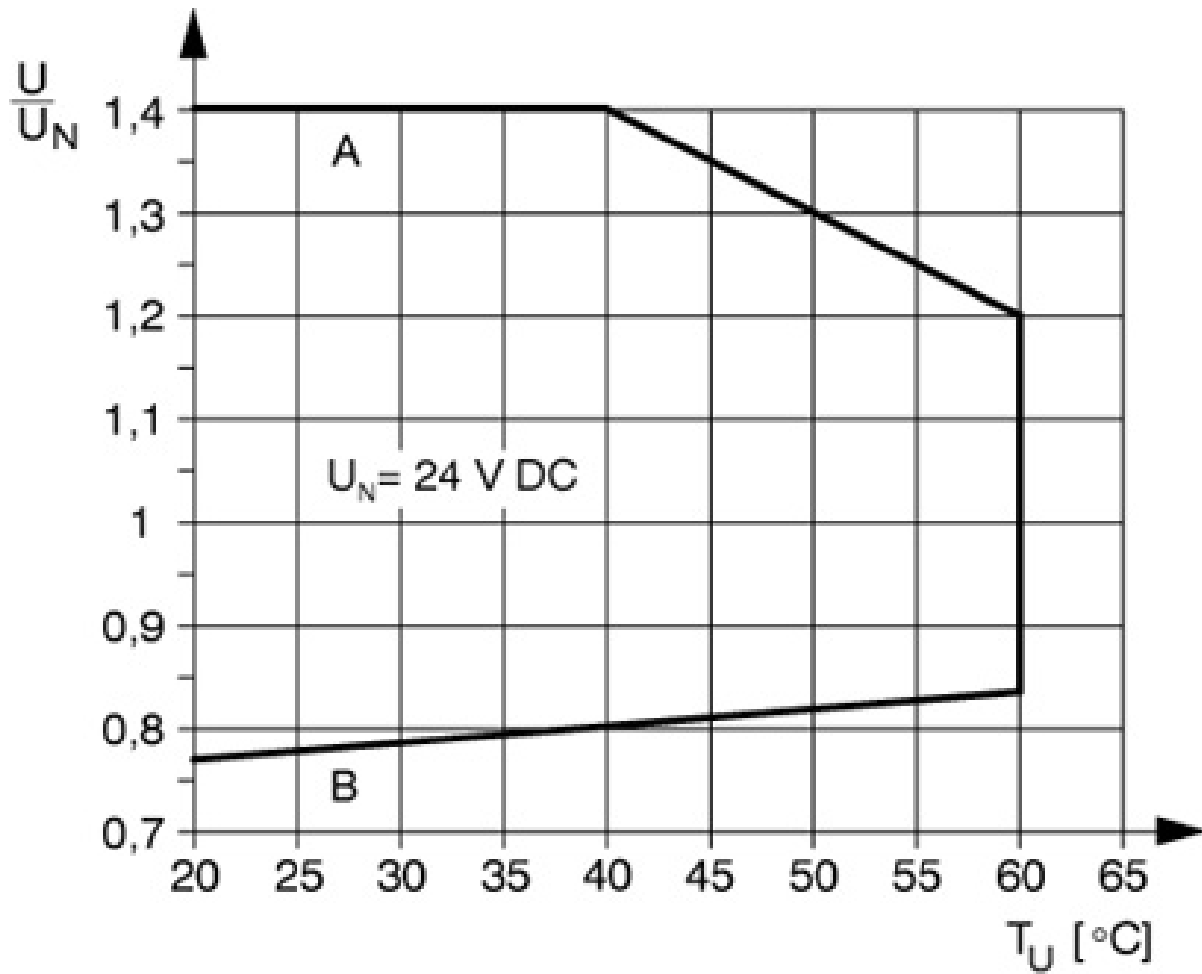

Curve A Maximum permissible continuous voltage  $U_{max}$  with limiting continuous current on the contact side (see relevant technical data)  
Curve B Minimum permissible operate voltage  $U_{op}$  after pre-excitation (see relevant technical data)

# Relay Module - PLC-RSC- 24DC/21 - 2966171

Diagram

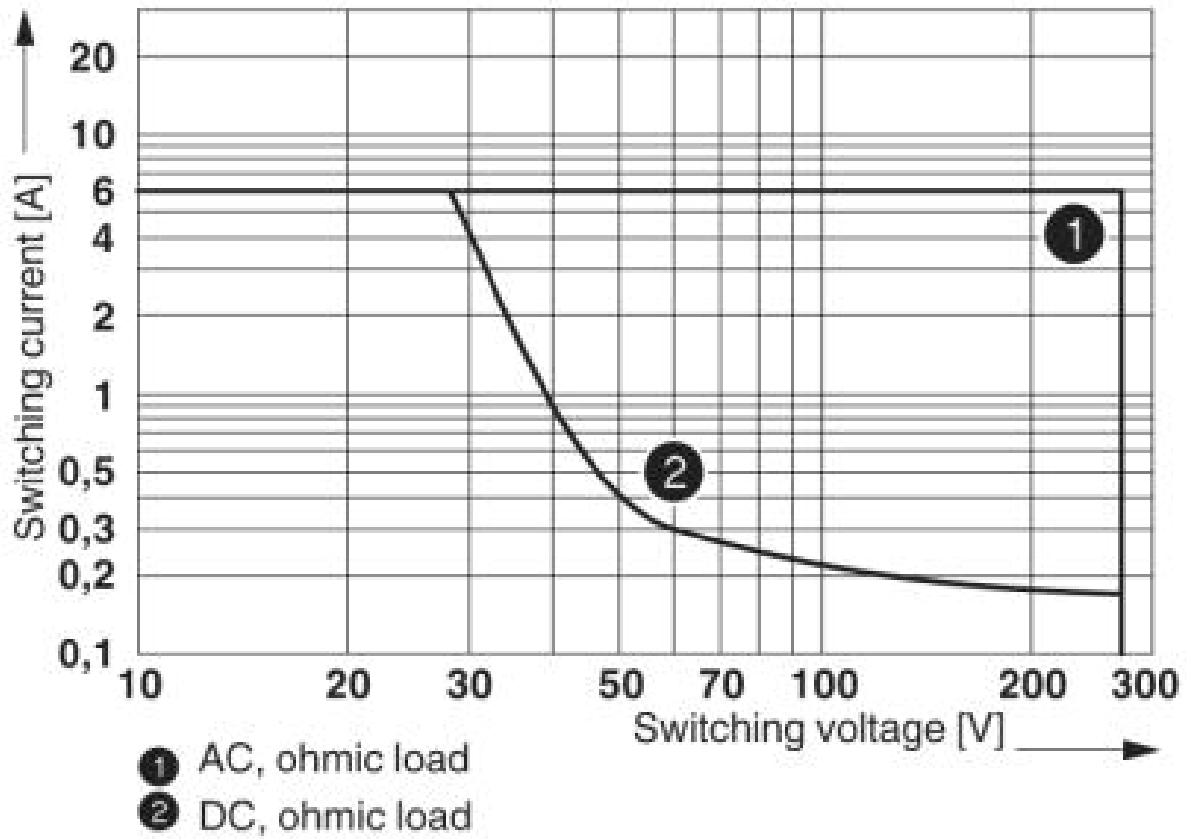

Interrupting rating

# Relay Module - PLC-RSC- 24DC/21 - 2966171

Circuit diagram

