

Surge protection base element - PT PE/S+1X2-BE - 2856265

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Base element for protective plug PT with surge voltage device protection for the power supply unit and one 2-wire floating signal circuit, mounting on NS 35/7.5 and NS 35/15, housing width: 17.5 mm

Product Features

- Plugs can be checked with CHECKMASTER
- Maximum ease of maintenance thanks to the two-piece design
- Base element remains an integral part of the installation
- Consistent plug-in signal circuit protection
- Impedance-neutral disconnection of plug for test and maintenance purposes

Key commercial data

package_quantity	10
GTIN	4017918819675

Technical data

Dimensions

Height	90 mm
Width	17.7 mm
Depth	52 mm
Horizontal pitch	1 Div.
Complete module height	90 mm
Complete module width	17.7 mm
Complete module depth	65.5 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Degree of protection	IP20

General

Inflammability class according to UL 94	V0
Color	black
Mounting type	DIN rail: 35 mm
Type	DIN rail module, two-section, divisible

Connection (protective circuit, power supply)

Connection method	Screw connection
--------------------------	------------------

Surge protection base element - PT PE/S+1X2-BE - 2856265

Technical data

Connection (protective circuit, power supply)

Connection type IN	Screw terminal blocks
Connection type OUT	Screw terminal blocks
Screw thread	M3
Tightening torque	0.8 Nm
Stripping length	8 mm
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

Remote indicator contact (protective circuit, power supply)

Protective circuit, information technology

Surge protection fault message	None
--------------------------------	------

Power supply, general

Connection method	Screw connection
Connection type IN	Screw terminal blocks
Connection type OUT	Screw terminal blocks
Screw thread	M3
Tightening torque	0.5 Nm
Stripping length	8 mm
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

classifications

eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130803
eCl@ss 7.0	27130803
eCl@ss 8.0	27130803

ETIM

Surge protection base element - PT PE/S+1X2-BE - 2856265

classifications

ETIM

ETIM 2.0	EC000472
ETIM 3.0	EC000472
ETIM 4.0	EC000472
ETIM 5.0	EC000472


UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

approvals

GOST /

Approval details



accessories

Labeled terminal marker

ZB 5,LGS:FORTL.ZAHLEN - 1050017



ZB 5,LGS:L1-N,PE - 1050415



Terminal marking

Surge protection base element - PT PE/S+1X2-BE - 2856265

accessories

ZB 5 :UNBEDRUCKT - 1050004



ZB 5,8:UNBEDRUCKT - 2715209



ZBF 5:UNBEDRUCKT - 0808642



Marker pen

X-PEN 0,35 - 0811228



B-STIFT - 1051993



Surge protection base element - PT PE/S+1X2-BE - 2856265

accessories

ZB 5:SO/CMS - 1050295



ZB 5,8,LGS:FORTL.ZAHLEN - 2715212




ZB 5,8:SO/CMS - 1050305



Drawings

Surge protection base element - PT PE/S+1X2-BE - 2856265

Dimensioned drawing

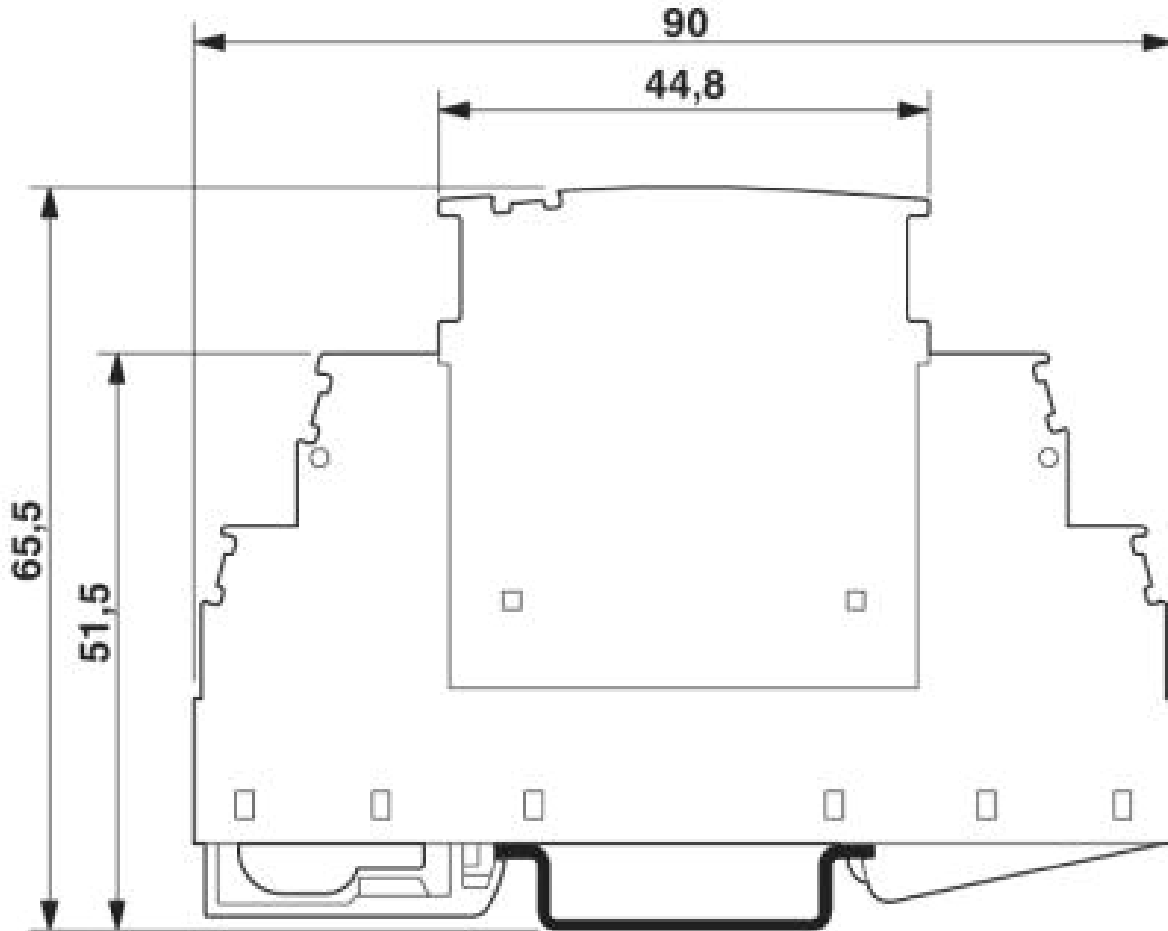

The figure shows the complete module consisting of a base element and connector

© Phoenix Contact 2014 - all rights reserved
<http://www.phoenixcontact.com>