

Panel feed-through - SSL 2,5 - 3043815

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Panel feed-through, Width: 5.2 mm, Color: gray

Product Features

- Can be used for a plate thickness of 0.8 mm to 3 mm

Key commercial data

package_quantity	50
GTIN	4017918936235

Technical data

Technical data

Color	gray
Material	PA
Inflammability class according to UL 94	V0

classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27141120
eCl@ss 7.0	27141120
eCl@ss 8.0	27141134

ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC001283
ETIM 5.0	EC002848

UNSPSC

UNSPSC 6.01	30211802
UNSPSC 7.0901	39121402

Panel feed-through - SSL 2,5 - 3043815


classifications

UNSPSC

UNSPSC 11	39121402
UNSPSC 12.01	39121402
UNSPSC 13.2	39121402


Drawings

Dimensioned drawing

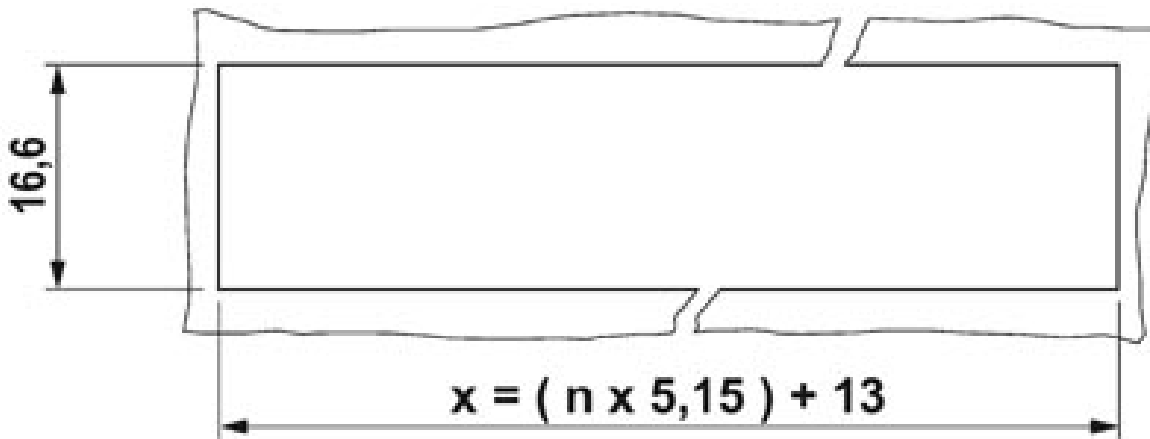

in conjunction with SC 2,5 ..., n = number of positions

Dimensioned drawing

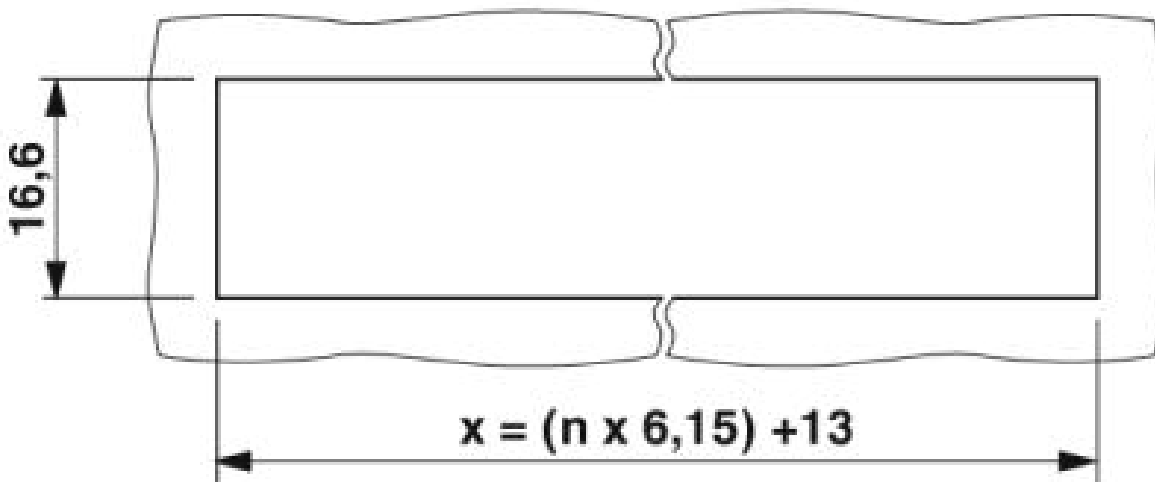

in conjunction with SC 4 ..., n = number of positions