

# Sensor/actuator terminal block - DIKD 1,5 BU - 2716101

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/actuator terminal block, Cross section: 0.2 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG: 24 - 12, Connection type: Screw connection, Width: 6.2 mm, Color: blue, Mounting type: NS 35/7,5, NS 35/15

## Product Features

- The positive and negative potential can be supplied to the insertion bridges via this power terminal block
- The first initiator can also be connected to this three-conductor feed-through terminal block

## Key commercial data

package_quantity	50
GTIN	4017918061814

## Technical data

### General

Number of levels	3
Number of connections	6
Color	blue
Insulating material	PA
Inflammability class according to UL 94	V2

### General

Rated surge voltage	4 kV
Pollution degree	3
Surge voltage category	III
Insulating material group	I
Connection in acc. with standard	IEC 60947-7-1
Nominal current I <sub>N</sub>	24 A
Nominal voltage U <sub>N</sub>	250 V
Open side panel	nein

### Dimensions

Width	6.2 mm
Length	72.5 mm
Height NS 35/7,5	54.5 mm
Height NS 35/15	62 mm

### Connection data

# Sensor/actuator terminal block - DIKD 1,5 BU - 2716101

## Technical data

### Connection data

Connection method	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.25 mm <sup>2</sup>
Conductor cross section stranded, with ferrule without plastic sleeve max.	2.5 mm <sup>2</sup>
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.25 mm <sup>2</sup>
Conductor cross section stranded, with ferrule with plastic sleeve max.	2.5 mm <sup>2</sup>
Cross section with insertion bridge, solid max.	4 mm <sup>2</sup>
Cross section with insertion bridge, stranded max.	2.5 mm <sup>2</sup>
2 conductors with same cross section, solid min.	0.2 mm <sup>2</sup>
2 conductors with same cross section, solid max.	1 mm <sup>2</sup>
2 conductors with same cross section, stranded min.	0.2 mm <sup>2</sup>
2 conductors with same cross section, stranded max.	1 mm <sup>2</sup>
2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.	0.25 mm <sup>2</sup>
2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.	1 mm <sup>2</sup>
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min.	0.5 mm <sup>2</sup>
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max.	1 mm <sup>2</sup>
Cross section with insertion bridge, solid max.	4 mm <sup>2</sup>
Cross section with insertion bridge, stranded max.	2.5 mm <sup>2</sup>
Stripping length	8 mm
Internal cylindrical gage	A3
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

## classifications

### eCl@ss

eCl@ss 4.0	27141118
eCl@ss 4.1	27141118
eCl@ss 5.0	27141118
eCl@ss 5.1	27141118

# Sensor/actuator terminal block - DIKD 1,5 BU - 2716101

## classifications

### eCl@ss

eCl@ss 6.0	27141128
eCl@ss 7.0	27141128
eCl@ss 8.0	27141128

### ETIM

ETIM 2.0	EC000900
ETIM 3.0	EC000900
ETIM 4.0	EC000900
ETIM 5.0	EC000900

### UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

## approvals

CSA / UL Recognized / cUL Recognized / GOST / GOST / cULus Recognized /

### Approval details

Nominal voltage UN	300 V
Nominal current IN	15 A
mm <sup>2</sup> /AWG/kcmil	28-14

Usegroups	B	C	D
Nominal voltage UN	300 V	150 V	300 V
Nominal current IN	15 A	15 A	10 A
mm <sup>2</sup> /AWG/kcmil	30-14	30-14	30-14

--	--	--	--

# Sensor/actuator terminal block - DIKD 1,5 BU - 2716101

## approvals

Usegroups	B	C	D
Nominal voltage UN	300 V	150 V	300 V
Nominal current IN	15 A	15 A	10 A
mm <sup>2</sup> /AWG/kcmil	30-14	30-14	30-14



## accessories

### Labeled terminal marker

SK 6,2/3,8:FORTL.ZAHLEN - 0804374



ZB 6 CUS - 0824992



ZB 6,LGS:FORTL.ZAHLEN - 1051016



## Sensor/actuator terminal block - DIKD 1,5 BU - 2716101

accessories

ZB 6,QR:FORTL.ZAHLEN - 1051029



ZB 6,LGS:GLEICHE ZAHLEN - 1051032



ZB 6,LGS:L1-N,PE - 1051414



ZB 6,LGS:U-N - 1051430



UC-TM 6 CUS - 0824589



UCT-TM 6 CUS - 0829602



# Sensor/actuator terminal block - DIKD 1,5 BU - 2716101

accessories

---

## Bridge

FB-150 METER - 0201595



FBI 100- 6 - 0201650



FBI 10- 6 - 0203250



FBI 20- 6 - 0201867



EB 80- DIK RD - 2715953



## Sensor/actuator terminal block - DIKD 1,5 BU - 2716101

### accessories

EB 80- DIK BU - 2715940



EB 10- DIK RD - 2716774



EB 10- DIK BU - 2716680



EB 10- DIK GY - 2715937



EB 80- DIK WH - 2715788



### Partition plate

# Sensor/actuator terminal block - DIKD 1,5 BU - 2716101

## accessories

ATP-DIKD 1,5 - 1413285



---

## Terminal marking

SBS 6:UNBEDRUCKT - 1007222



---

ZB 6:UNBEDRUCKT - 1051003



---

UC-TM 6 - 0818085



---

UCT-TM 6 - 0828736



---

## Mounting rail



## Sensor/actuator terminal block - DIKD 1,5 BU - 2716101

### accessories

NS 35/ 7,5 PERF 2000MM - 0801733



NS 35/ 7,5 UNPERF 2000MM - 0801681



NS 35/ 7,5 WH PERF 2000MM - 1204119



NS 35/ 7,5 WH UNPERF 2000MM - 1204122



NS 35/ 7,5 AL UNPERF 2000MM - 0801704



NS 35/ 7,5 ZN PERF 2000MM - 1206421



## Sensor/actuator terminal block - DIKD 1,5 BU - 2716101

accessories

---

NS 35/ 7,5 ZN UNPERF 2000MM - 1206434



NS 35/ 7,5 CU UNPERF 2000MM - 0801762



NS 35/ 7,5 CAP - 1206560



NS 35/15 PERF 2000MM - 1201730



NS 35/15 UNPERF 2000MM - 1201714



## Sensor/actuator terminal block - DIKD 1,5 BU - 2716101

### accessories

NS 35/15 WH PERF 2000MM - 0806602



NS 35/15 WH UNPERF 2000MM - 1204135



NS 35/15 AL UNPERF 2000MM - 1201756



NS 35/15 ZN PERF 2000MM - 1206599



NS 35/15 ZN UNPERF 2000MM - 1206586



NS 35/15 CU UNPERF 2000MM - 1201895



## Sensor/actuator terminal block - DIKD 1,5 BU - 2716101

accessories

---

NS 35/15 CAP - 1206573



NS 35/15-2,3 UNPERF 2000MM - 1201798



**End block**

CLIPFIX 35 - 3022218



CLIPFIX 35-5 - 3022276



E/NS 35 N - 0800886



# Sensor/actuator terminal block - DIKD 1,5 BU - 2716101

accessories

E/UK - 1201442




E/UK 1 - 1201413



## Drawings

Circuit diagram

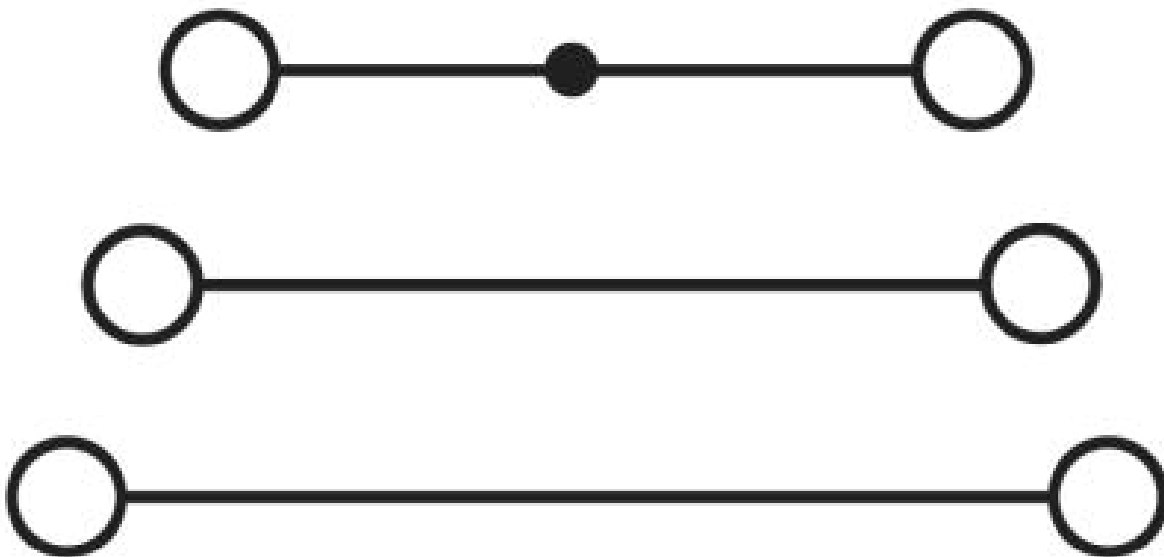

1 = fixed bridge  
2 = insertion bridge  
3 = partition plate

© Phoenix Contact 2014 - all rights reserved  
<http://www.phoenixcontact.com>