

Base strip - SMSTBA 2,5/ 2-G-5,08 - 1767371

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Header, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 2, Pitch: 5.08 mm, Color: green, Contact surface: Tin, Assembly: Soldering

The figure shows a 10-position version of the product

Product Features

- Plug-in direction 45° to the PCB
- Used where space is restricted overhead
- Versions with side panel

Key commercial data

| | |
|------------------|---------------|
| package_quantity | 50 |
| GTIN | 4017918033187 |

Technical data

Dimensions

| | |
|----------------|----------|
| Length | 16.5 mm |
| Pitch | 5.08 mm |
| Dimension a | 5.08 mm |
| Pin dimensions | 1 x 1 mm |
| Hole diameter | 1.4 mm |

General

| | |
|---|-----------------|
| Range of articles | SMSTBA 2,5/..-G |
| Insulating material group | I |
| Rated surge voltage (III/3) | 4 kV |
| Rated surge voltage (III/2) | 4 kV |
| Rated surge voltage (II/2) | 4 kV |
| Rated voltage (III/3) | 250 V |
| Rated voltage (III/2) | 320 V |
| Rated voltage (II/2) | 630 V |
| Connection in acc. with standard | EN-VDE |
| Nominal current I _N | 12 A |
| Maximum load current | 12 A |
| Insulating material | PA |
| Inflammability class according to UL 94 | V0 |

Base strip - SMSTBA 2,5/ 2-G-5,08 - 1767371

Technical data

General

| | |
|----------------------------|-------|
| Color | green |
| Number of positions | 2 |

classifications

eCl@ss

| | |
|-------------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |
| eCl@ss 8.0 | 27440402 |

ETIM

| | |
|-----------------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002637 |
| ETIM 5.0 | EC002637 |


UNSPSC

| | |
|----------------------|----------|
| UNSPSC 6.01 | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11 | 39121409 |
| UNSPSC 12.01 | 39121409 |
| UNSPSC 13.2 | 39121409 |

approvals

CSA / UL Recognized / VDE Gutachten mit Fertigungsüberwachung / cUL Recognized / GOST / IECCE CB Scheme / GOST / CCA / cULus Recognized /

Approval details

| | | |
|---|----------|----------|
|  | | |
| Usegroups | B | D |
| Nominal voltage UN | 300 V | 300 V |
| Nominal current IN | 15 A | 10 A |
| mm ² /AWG/kcmil | | |

Base strip - SMSTBA 2,5/ 2-G-5,08 - 1767371

approvals

UL Recognized

| Usegroups | B | D |
|----------------------------|-------|-------|
| Nominal voltage UN | 300 V | 300 V |
| Nominal current IN | 15 A | 10 A |
| mm ² /AWG/kcmil | | |

VDE Gutachten mit Fertigungsüberwachung

| | |
|----------------------------|-------|
| Nominal voltage UN | 250 V |
| Nominal current IN | 12 A |
| mm ² /AWG/kcmil | |

cUL Recognized

| Usegroups | B | D |
|----------------------------|-------|-------|
| Nominal voltage UN | 300 V | 300 V |
| Nominal current IN | 15 A | 10 A |
| mm ² /AWG/kcmil | | |

GOST

IECEE CB Scheme

| | |
|----------------------------|-------|
| Nominal voltage UN | 250 V |
| Nominal current IN | 12 A |
| mm ² /AWG/kcmil | |

CCA

| | |
|--------------------|-------|
| Nominal voltage UN | 250 V |
|--------------------|-------|

Base strip - SMSTBA 2,5/ 2-G-5,08 - 1767371

approvals

| | |
|----------------------------|------|
| Nominal current IN | 12 A |
| mm ² /AWG/kcmil | |



accessories

Coding element

CR-MSTB - 1734401



Labeled terminal marker

SK 5,08/3,8:FORTL.ZAHLEN - 0804293



Filler plug


MSTB-BL - 1755477



Drawings


Base strip - SMSTBA 2,5/ 2-G-5,08 - 1767371

Drilling diagram

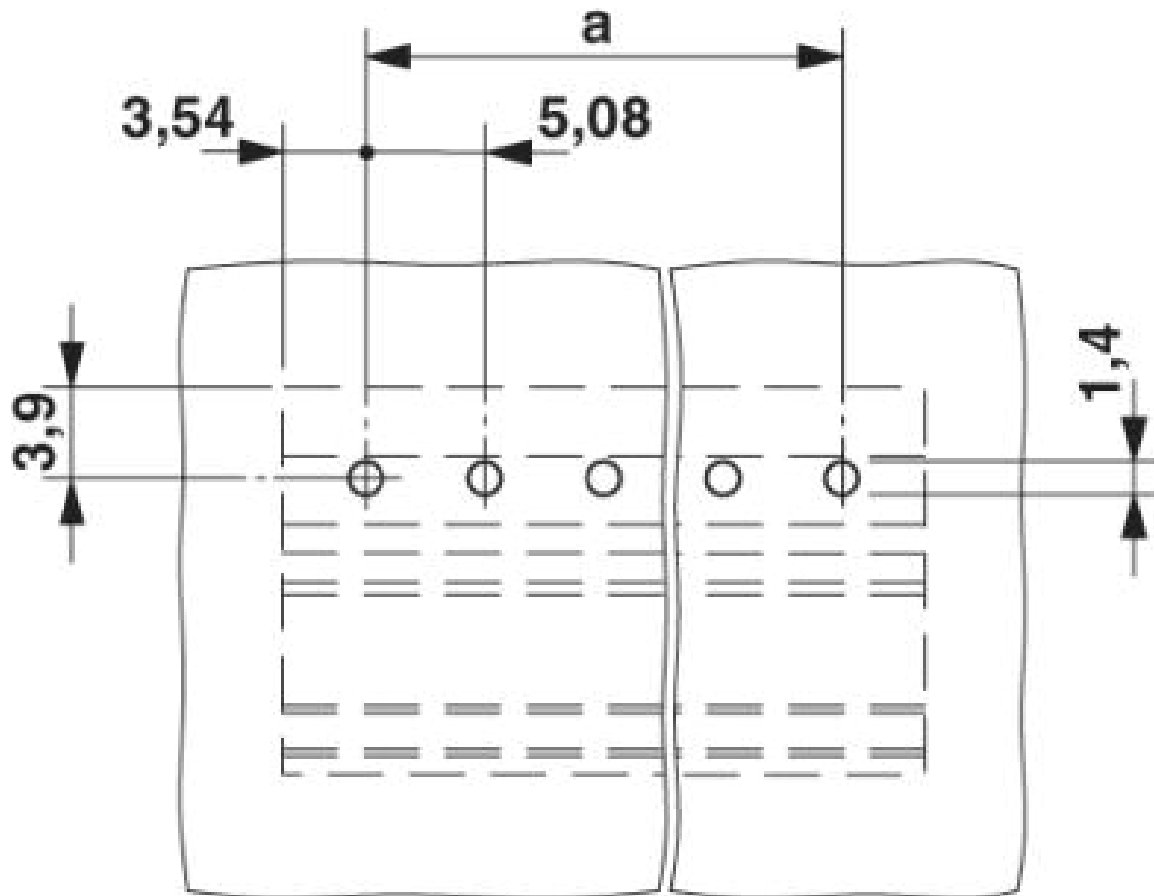

Base strip - SMSTBA 2,5/ 2-G-5,08 - 1767371

Diagram

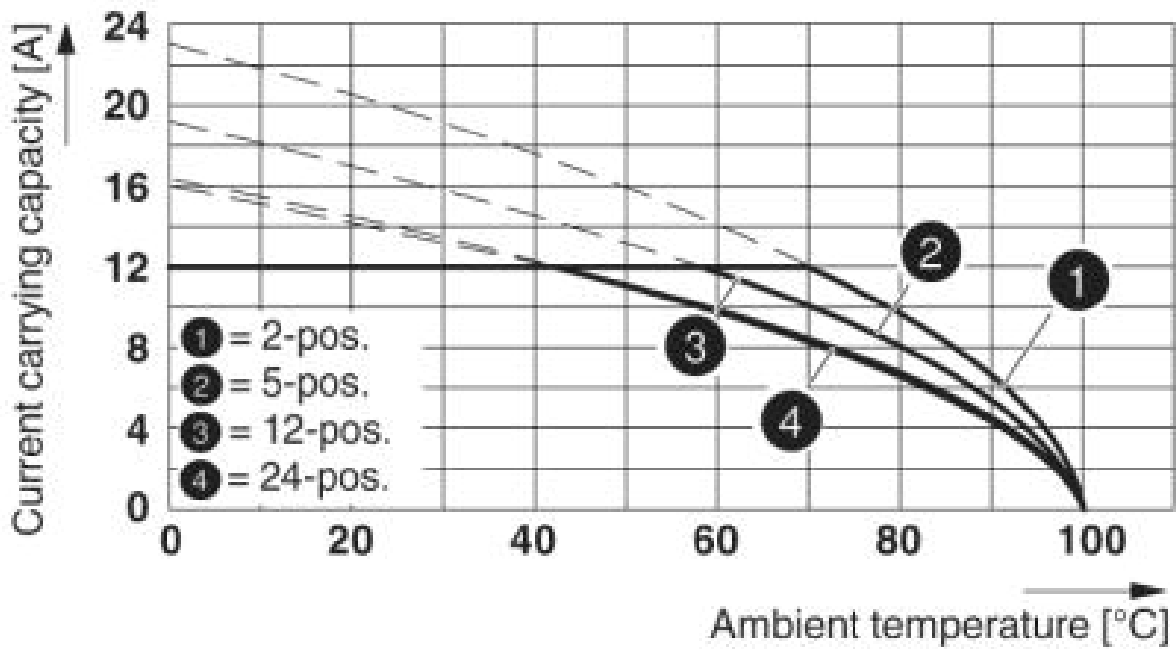

Type: SMSTB 2,5/...-ST(-5,08) with SMSTBA 2,5/...-G(-5,08)

Dimensioned drawing

