

Insulated enclosure

175 × 115 × 100 mm

20A / 25A / 32A / 40A

- Main/Emergency-Off Switch
- Main Switch

6 pole

IP66

Insulated polycarbonate enclosure
Cover interlock in ON position



Order code structure:

Ordering example: 6 pole Main/Emergency-Off Switch, 20A, padlockable with V-handle:

Type - Switching programme - Mounting form

H216 - 41600 - 720V4


Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H216	20	5.5	3.7
H220	25	7.5	5.5
H226	32	11	7.5
H233	40	15	11

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts		Switching diagram	
		n/o	n/c		
41600	6	0	0		

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
720N4		N-padlock device yellow/red	720N1		N-padlock device black
720M4		M-padlock device yellow/red	720M1		M-padlock device black
720V4		padlockable with V-handle yellow/red	720V1		padlockable with V-handle silver/black

Dimensions in mm:

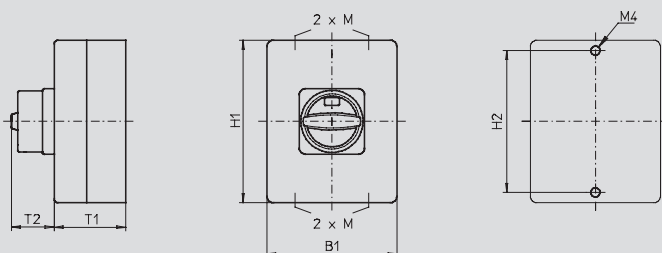

Mounting form	H1	B1	T1	T2	2×M	H2
720N4 / 720N1	175	115	100	33	20/25	165
720M4 / 720M1	175	115	100	38	20/25	165
720V4 / 720V1	175	115	100	39	20/25	165