

Four hole mounting 36 × 36 mm

20 A / 25 A / 32 A / 40 A / 63 A

- Main/Emergency-Off Switch
- Main Switch

3 ... 4 pole

IP66 (front)

Four hole mounting 36 × 36 mm



Order code structure:

Ordering example: 4 pole Main/Emergency-Off Switch, 20A, N-padlock device:

Type - Switching programme - Mounting form

H216 - 41400 - 033N4

Type	Rated data (IEC 60947)			Degree of protection Terminals
	Operational current I _o AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)		
H216	20	5.5	3.7	IP20
H220	25	7.5	5.5	IP20
H226	32	11	7.5	IP20
H233	40	15	11	IP20
H263	63	22	18.5	IP20


Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts	
		n/o	n/c
41300	3	0	0
41311	3	1	1
41320	3	2	0
41400	4	0	0
41411	4	1	1
41420	4	2	0

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
033N4		N-padlock device yellow/red	033N1		N-padlock device black
033M4		M-padlock device yellow/red	033M1		M-padlock device black
033V4		padlockable with V-handle yellow/red	033V1		padlockable with V-handle silver/black

Dimensions in mm:

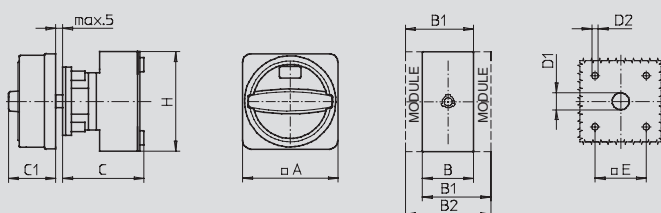

Mounting form	A	B	B1	B2	C	C1	D1	D2	E	H
Types H216 / H220 / H226 / H233:										
033N4 / 033N1	67	36	48	60	58	33	15	4.5	36	70
033M4 / 033M1	67	36	48	60	58	38	15	4.5	36	70
033V4 / 033V1	48	36	48	60	58	32	12	4.5	36	70
Type H263:										
033N4 / 033N1	67	50	69	88	58	33	15	4.5	36	72
033M4 / 033M1	67	50	69	88	58	38	15	4.5	36	72
033V4 / 033V1	48	50	69	88	58	32	12	4.5	36	72