

## Datasheet - AZ 17/170-B1-2245

Safety switch with separate actuator / AZ 17 / Actuator



Preferred typ

- Damps vibration on guard device



(Minor differences between the printed image and the original product may exist!)

### Ordering details

|                          |                   |
|--------------------------|-------------------|
| Product type description | AZ 17/170-B1-2245 |
| Article number           | 101137406         |
| EAN code                 | 4030661280905     |

### Global Properties

|              |                                      |
|--------------|--------------------------------------|
| Product name | Gummigelagerter gerader Betätiger B1 |
| Weight       | 15 g                                 |

### Mechanical data

|                          |                           |
|--------------------------|---------------------------|
| Design of actuators      | straight, rubber mounting |
| Minimum actuating radius | 140 mm                    |

### notice

On hinged guards, minimum actuating radius at 90° to the plane of the actuator 140 mm  
minimum actuating radius on hinged guards in line with the plane of the actuator 200 mm  
Max. 200 Ncm tightening torque for mounting the actuator  
The axis of the hinge should be 13 mm above the top edge of the safety switch and in the same plane

### Documents

**Operating instructions and Declaration of conformity (de)** 316 kB, 05.02.2014

Code: mrl\_az17-azm170-betaetiger\_de

**Operating instructions and Declaration of conformity (it)** 117 kB, 10.02.2014

Code: mrl\_az17-azm170-betaetiger\_it

**Operating instructions and Declaration of conformity (en)** 116 kB, 24.02.2014


Code: mrl\_az17-azm170-betaetiger\_en

**Operating instructions and Declaration of conformity (es)** 117 kB, 12.02.2014

Code: mrl\_az17-azm170-betaetiger\_es

## Images

---

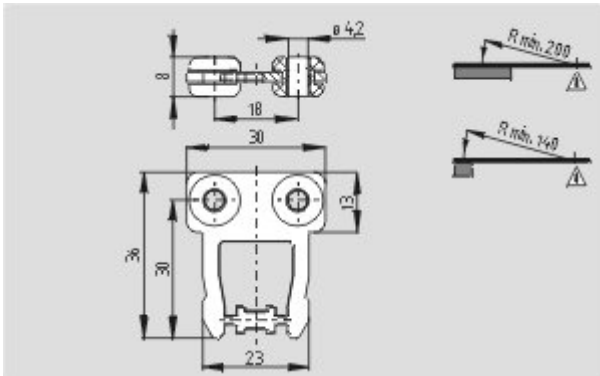

Dimensional drawing (actuator)

---

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 06.03.2014 - 14:43:52h Kasbase 2.2.18.F DBI

Image

Image  
et=sS