

Datasheet - SRB 301HC/T-24V



Guard door monitors and Safety control modules for Emergency Stop applications / General Purpose safety controllers (Series PROTECT SRB) / SRB 301HC/T

Preferred typ



- 3 safety contacts, STOP 0
- 1 Signalling output
- Suitable for signal processing of potential-free outputs, e.g. emergency stop command devices, position switches and solenoid interlocks and Safety mats

(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description	SRB 301HC/T-24V
Article number	101193478
EAN code	4030661356150

Approval

Approval



Classification

Standards	EN ISO 13849-1, IEC 61508, EN 60947-5-1
PL	up e (STOP 0)
Control category	up 4 (STOP 0)
DC	99% (STOP 0)
CCF	> 65 points
PFH value	$\leq 2,0 \times 10^{-8}/h$ (STOP 0)
SIL	up 3 (STOP 0)
Mission time	20 Years
- notice	The PFH value is applicable for the combinations listed in the table for contact load (K) (current through enabling paths) and switching cycle


number (n-op/y).

In case of 365 operating days per year and a 24-hour operation, this results in the specified switching cycle times (t-cycle) for the relay contacts.

Diverging applications on request.

K	n-op/y	t-cycle
20 %	525.800	1,0 min
40 %	210.240	2,5 min
60 %	75.087	7,0 min
80 %	30.918	17,0 min
100 %	12.223	43,0 min

Global Properties

Product name	SRB 301HC/T
Standards	IEC/EN 60204-1, EN 60947-5-1, EN ISO 13849-1, IEC 61508
Compliance with the Directives (Y/N) 	Yes
Climatic stress	EN 60068-2-78
Mounting	snaps onto standard DIN rail to EN 60715
Terminal designations	IEC/EN 60947-1
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic, ventilated
- Material of the contacts	, self-cleaning, positive action
Weight	380 g
Start conditions	Automatic or Start button
Start input (Y/N)	Yes
Feedback circuit (Y/N)	Yes
Start-up test (Y/N)	No
Automatic reset function (Y/N)	Yes
Reset with edge detection (Y/N)	No
Pull-in delay	
- ON delay with reset button	200 ms, max. 400 ms
Drop-out delay	
- Drop-out delay in case of power failure	100 ms
- Drop-out delay in case of emergency stop	20 ms, max. 25 ms

Mechanical data

Connection type	Screw connection
Cable section	
- Min. Cable section	0,25 mm ²
- Max. Cable section	2.5 mm ²
Pre-wired cable	rigid or flexible
Tightening torque for the terminals	0,6 Nm
Detachable terminals (Y/N)	Yes
Mechanical life	10.000.000 operations
Electrical lifetime	Derating curve available on request
Resistance to shock	30 g / 11 ms
Resistance to vibration To EN 60068-2-6	10 ... 55 Hz, Amplitude 0,35 mm

Ambient conditions

Ambient temperature	
- Min. environmental temperature	-25 °C
- Max. environmental temperature	+60 °C
Storage and transport temperature	
- Min. Storage and transport temperature	-40 °C

- Max. Storage and transport temperature	+85 °C
Protection class	
- Protection class-Enclosure	IP40
- Protection class-Terminals	IP20
- Protection class-Clearance	IP54
Air clearances and creepage distances To IEC/EN 60664-1	
- Rated impulse withstand voltage U_{imp}	4 kV
- Overvoltage category	II To VDE 0110
- Degree of pollution	2 To VDE 0110

Electromagnetic compatibility (EMC)

EMC rating	conforming to EMC Directive
------------	-----------------------------

Electrical data

Rated DC voltage for controls	
- Min. rated DC voltage for controls	20.4 V
- Max. rated DC voltage for controls	28.8 V
Rated AC voltage for controls, 50 Hz	
- Min. rated AC voltage for controls, 50 Hz	20.4 V
- Max. rated AC voltage for controls, 50 Hz	26.4 V
Rated AC voltage for controls, 60 Hz	
- Min. rated AC voltage for controls, 60 Hz	20.4 V
- Max. rated AC voltage for controls, 60 Hz	26.4 V
Contact resistance	max. 100 mΩ
Power consumption	1.6 W; 3.7 VA
Type of actuation	AC / DC
Rated operating voltage U_e	24 VDC -15% / +20%, residual ripple max. 10% 24 VAC -15% / +10%
Frequency range	50 / 60 Hz
Electronic protection (Y/N)	Yes
Fuse rating for the operating voltage	Internal electronic trip, tripping current F1: > 0,5 A; secondary side: tripping current > 0,12 A
Current and tension on control circuits	
- S13 ... S14	24 VDC, Test current: 20 mA, Start pulse: 80 mA / 120 ms
- S23 ... S24	24 VDC, Test current: 20 mA
- X1 ... X2	24 VDC, Start pulse: 80 mA / 120 ms
Bridging in case of voltage drops	90 ms

Inputs

Monitored inputs

- Short-circuit recognition (Y/N)	Yes
- Wire breakage detection (Y/N)	Yes
- Earth connection detection (Y/N)	Yes
Number of shutters	0 piece
Number of openers	2 piece
Cable length	1500 m with 1.5 mm ² ; 2500 m with 2.5 mm ²
Conduction resistance	max. 40 Ω


Outputs

Stop category	0
Number of safety contacts	3 piece
Number of auxiliary contacts	1 piece
Number of signalling outputs	0 piece
Switching capacity	
- Switching capacity of the safety contacts	max. 250 VAC, 8 A ohmic (inductive in case of appropriate protective wiring)
- Switching capacity of the auxiliary contacts	24 V DC, 2 A
Fuse rating	
- Protection of the safety contacts	8 A slow blow, 10 A quick-blow
- Fuse rating for the auxiliary contacts	2 A slow blow, 2.5 A quick-blow
Utilisation category To EN 60947-5-1	AC-15: 230 V / 6 A DC-13: 24 V / 6 A
Note on the utilisation category	Residual current at ambient temperature up to: - 45°C = 24 A; - 55°C = 18 A; - 60°C = 12 A
Number of undelayed semi-conductor outputs with signaling function	0 piece
Number of undelayed outputs with signaling function (with contact)	1 piece
Number of delayed semi-conductor outputs with signaling function.	0 piece
Number of delayed outputs with signalling function (with contact).	0 piece
Number of secure undelayed semi-conductor outputs with signaling function	0 piece
Number of secure, undelayed outputs with signaling function, with contact.	3 piece
Number of secure, delayed semi-conductor outputs with signaling function	0 piece
Number of secure, delayed outputs with signaling function (with contact).	0 piece

LED switching conditions display

LED switching conditions display (Y/N)	Yes
Number of LED's	4 piece
LED switching conditions display	
- The integrated LEDs indicate the following operating states.	
- Position relay K1	
- Position relay K2	
- Supply voltage	

Miscellaneous data

Applications	 Emergency-Stop button  Guard system  Safety mats  Pull-wire emergency stop switches
--------------	---

Dimensions

Dimensions	
- Width	45 mm
- Height	100 mm
- Depth	121 mm

notice

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

notice - Wiring example

2 channel control shown for a guard-door monitor with two contacts, of which at least one contact has positive break, with external reset button (R).

Relay outputs: Suitable for 2 channel control, for increase in capacity or number of contacts by means of contactors or relays with positive-guided contacts.

(H2) = Feedback circuit

The control recognises cross-short, cable break and earth leakages in the monitoring circuit.

The wiring diagram is shown with guard doors closed and in de-energised condition.

Documents

Operating instructions and Declaration of conformity (de) 319 kB, 29.11.2013

Code: mrl_srb_301hc_t_de

Operating instructions and Declaration of conformity (fr) 295 kB, 21.01.2014

Code: mrl_srb_301hc_t_fr

Operating instructions and Declaration of conformity (nl) 295 kB, 21.01.2014

Code: mrl_srb_301hc_t_nl

Operating instructions and Declaration of conformity (it) 292 kB, 21.01.2014

Code: mrl_srb_301hc_t_it

Operating instructions and Declaration of conformity (jp) 395 kB, 21.01.2014

Code: mrl_srb_301hc_t_jp

Operating instructions and Declaration of conformity (es) 296 kB, 21.01.2014

Code: mrl_srb_301hc_t_es

Operating instructions and Declaration of conformity (en) 309 kB, 29.11.2013

Code: mrl_srb_301hc_t_en

Wiring example (99) 19 kB, 04.08.2008

Code: ksr3l22

TÜV certification (de, en) 226 kB, 13.02.2014

Code: z_srbp05


CCC certification (en) 276 kB, 03.05.2011

Code: q_srbp03

CCC certification (cn) 199 kB, 03.05.2011

Code: q_srbp04

Images

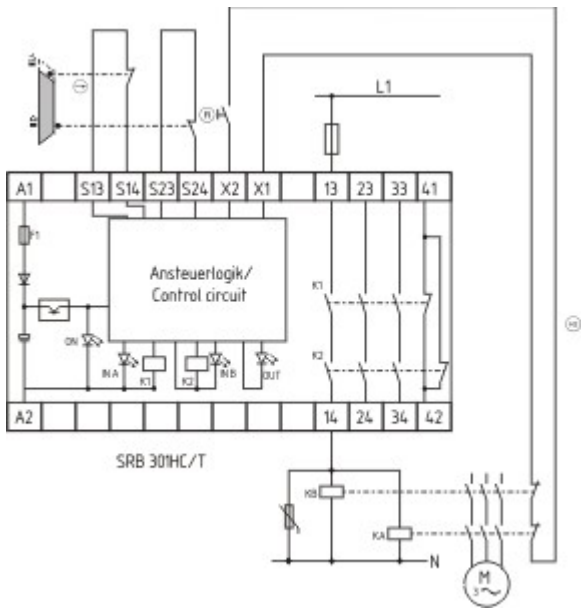

Wiring example

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 19.03.2014 - 12:14:18h Kasbase 2.2.18.F DBI

Image

Image
et=sS