

Datasheet - FWS 1206C

Fail-safe standstill monitors / FWS 1206



Preferred typ



- Detects standstill using 1 or 2 impulse sensors
- Uses additional standstill signal, e.g. PLC as second input channel
- 2 safety contacts
- 2 Signalling outputs

(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description	FWS 1206C
Article number	101170058
EAN code	4030661297200

Approval

Approval




Classification

Standards	EN ISO 13849-1, IEC 61508
PL	up d
Control category	up 3
PFH value	$1.0 \times 10^{-7}/h$
SIL	up 2
Mission time	20 Years

Global Properties

Product name	FWS 1206
--------------	----------

Standards	IEC/EN 60204-1, EN ISO 13849-1, BG-GS-ET-20
Compliance with the Directives (Y/N) 	Yes
Climatic stress	EN 60068-2-3, BG-GS-ET-14
Mounting	snaps onto standard DIN rail to EN 60715
Terminal designations	IEC/EN 60947-1
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic, ventilated
- Material of the contacts	Ag-Ni, 0,2 µm gold flashed
Weight	200 g
Start input (Y/N)	No
Feedback circuit (Y/N)	Yes
Reset after disconnection of supply voltage (Y/N)	No
Automatic reset function (Y/N)	No
Reset with edge detection (Y/N)	Yes

Mechanical data

Connection type	Screw connection
Cable section	
- Min. Cable section	0,2 mm ²
- Max. Cable section	2.5 mm ²
Pre-wired cable	rigid or flexible
Tightening torque for the terminals	0,6 Nm
Detachable terminals (Y/N)	No
Mechanical life	20.000.000 operations
Electrical lifetime	150.000 operations for 230 VAC, 5 A (cos φ = 1)
resistance to shock	30 g / 11 ms
Resistance to vibration To EN 60068-2-6	10 ... 55 Hz, Amplitude 0,35 mm
Standstill frequency	Inputs X1 / X2: 1 Hz / 1 Hz
hysteresis	10 % of standstill frequency

Ambient conditions

Ambient temperature	
- Min. environmental temperature	0 °C
- Max. environmental temperature	+55 °C
Storage and transport temperature	
- Min. Storage and transport temperature	-25 °C
- Max. Storage and transport temperature	+70 °C
Protection class	
- Protection class-Enclosure	IP40
- Protection class-Terminals	IP20
- Protection class-Clearance	IP54
Air clearances and creepage distances To IEC/EN 60664-1	
- Rated impulse withstand voltage U _{imp}	4.8 kV
- Overvoltage category	II To VDE 0110
- Degree of pollution	3 To VDE 0110

Electromagnetic compatibility (EMC)

EMC rating	10 V/m
------------	--------

Electrical data

Rated DC voltage for controls	
- Min. rated DC voltage for controls	20.4 V
- Max. rated DC voltage for controls	27.6 V
Rated AC voltage for controls, 50 Hz	
- Min. rated AC voltage for controls, 50 Hz	-
- Max. rated AC voltage for controls, 50 Hz	-
Rated AC voltage for controls, 60 Hz	
- Min. rated AC voltage for controls, 60 Hz	-
- Max. rated AC voltage for controls, 60 Hz	-
Contact resistance	max. 100 mΩ
Power consumption	< 5 W
Type of actuation	DC
Rated insulation voltage U_i	250 V
Rated operating voltage U_e	24 VDC \pm 15 %
Thermal test current I_{the}	6 A
Operating current I_e	0,2 A
Electronic protection (Y/N)	No

Inputs

Monitored inputs

- Short-circuit recognition (Y/N)	No
- Wire breakage detection (Y/N)	Yes
- Earth connection detection (Y/N)	Yes
Input frequency	4000 Hz
min. pulse duration	125 μ s
Input resistance	approx. 4000 Ω at GND
Input signal "1"	10 ... 30 VDC
Input signal "0"	0 ... 2 VDC
Cable length	100 m with 0,75 mm ² (for Rated voltage)

Outputs

Stop category	0
Number of safety contacts	2 piece
Number of auxiliary contacts	0 piece
Number of signalling outputs	2 piece
Switching capacity	
- Switching capacity of the safety contacts	min. 10 mA, max. 6 A
- Switching capacity of the signaling/diagnostic outputs	Y1, Y2: max. 100 mA
Fuse rating	
- Protection of the safety contacts	6 A gG D-fuse
- Fuse rating for the signaling/diagnostic outputs	short-circuit proof
Signalling output	Y 1: Authorized operation, safety contacts on; Y 2: Error, high signal
Utilisation category To EN 60947-5-1	AC-15: 230 V / 3 A DC-13: 24 V / 2 A
Number of undelayed semi-conductor outputs with signaling function	2 piece
Number of undelayed outputs with signaling function (with contact)	0 piece
Number of delayed semi-conductor outputs with signaling function.	0 piece
Number of delayed outputs with signalling function (with contact).	0 piece
Number of secure undelayed semi-conductor outputs with signaling function	0 piece
Number of secure, undelayed outputs with signaling function, with contact.	0 piece

Number of secure, delayed semi-conductor outputs with signaling function	0 piece
Number of secure, delayed outputs with signaling function (with contact).	0 piece

LED switching conditions display

LED switching conditions display (Y/N)	Yes
Number of LED's	1 piece

Integral system diagnosis ISD

Integral system diagnosis ISD

- The following faults are registered by the safety monitoring modules and indicated by ISD
- Interruption of the connections to the inductive proximity switches
- Failure of the safety relay to pull-in or drop-out
- Fault on the input circuits or the relay control circuits of the safety monitoring module
- Failure of the proximity switches
- Failure of one channel being evaluated

Miscellaneous data

Applications



safe standstill monitoring

Dimensions

Dimensions

- Width	22.5 mm
- Height	100 mm
- Depth	121 mm

notice

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

notice - Wiring example

To monitor one guard door at plants with dangerous run-on movements up to PL d and Category 3

Standstill monitoring for unlocking solenoid interlocks

The solenoid interlock can be opened, when the standstill monitor has detected the end of the run-on movement by means of one or two inductive proximity switches as well as the supplementary standstill signal (H7). When the button (E) is actuated, the coil of the solenoid interlock is energised.

If only one inductive proximity switch is connected to the standstill monitor, the standstill frequencies must be identical and inputs X1 and X2 must be bridged.

For suitable IFL range p-type inductive proximity switches, refer to "Schmersal Catalogue Automatisierungstechnik".

The wiring diagram is shown with guard doors closed and in de-energised condition.

The ISD tables (Integral System Diagnostics) for analysis of the fault indications and their causes are shown in the appendix.

Documents

Operating instructions and Declaration of conformity (es) 251 kB, 21.02.2012

Code: mrl_fws1206_es

Operating instructions and Declaration of conformity (nl) 250 kB, 08.02.2012

Code: mrl_fws1206_nl

Operating instructions and Declaration of conformity (pl) 222 kB, 28.08.2013

Code: mrl_fws1206_pl

Operating instructions and Declaration of conformity (it) 251 kB, 08.02.2012

Code: mrl_fws1206_it

Operating instructions and Declaration of conformity (en) 246 kB, 20.01.2012

Code: mrl_fws1206_en

Operating instructions and Declaration of conformity (jp) 354 kB, 21.02.2012

Code: mrl_fws1206_jp

Operating instructions and Declaration of conformity (de) 347 kB, 15.12.2011

Code: mrl_fws1206_de

Operating instructions and Declaration of conformity (fr) 251 kB, 08.02.2012

Code: mrl_fws1206_fr

Wiring example (99) 27 kB, 20.08.2008

Code: kfws1107

ISD tables (Integral System Diagnostics) (de) 49 kB, 29.07.2008

Code: i_fwsp01

ISD tables (Integral System Diagnostics) (en) 30 kB, 29.07.2008

Code: i_fwsp02


BG-test certificate (en) 219 kB, 04.10.2011

Code: z_fw1p02

BG-test certificate (de) 223 kB, 28.09.2011

Code: z_fw1p01

Images

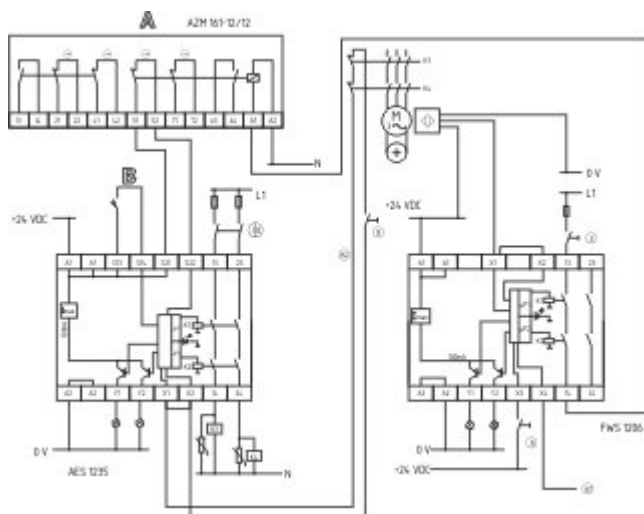

Wiring example

Image

Image
et=sS
e