## Product data sheet Characteristics

## XVUZ02

# fixing plate with 100mm pole - black



#### Main

Commercial Status	Commercialised
Range of product	Harmony XVU
Product or component type	Modular tower light
Accessory / separate part type	Fixing plate
Accessory / separate part category	Mounting and fixing accessory
Component name	XVU
Mounting diameter	60 mm

#### Complementary

Product compatibility	Top: swivel mounting support	
	Top: DC body	
	Top: AC body	
Material	Aluminium	_
	PC (polycarbonate)	
	ABS (acrylonitrile butadiene-styrene)	
	PBT (polybutylene terephthalate) V-0 flame retardant conforming to UL 94	
Housing colour	Black	
Connections - terminals	Push-in	_
[Us] rated supply voltage	110240 V AC	
	24 V AC/DC	
Length	117 mm	
Product weight	0.132 kg	_

#### Environment


Ambient air temperature for storage	-4070 °C
Ambient air temperature for operation	-2550 °C
IP degree of protection	IP65
Product certifications	CE CSA RoHS UL

# Product data sheet Dimensions Drawings


# XVUZ02

## Fixing Plate with Pole

#### Dimensions




#### Modular Tower Lights Mounting

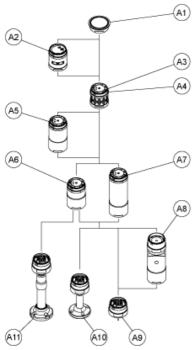

Drawing	Part name
A1	Top cover
A2	Buzzer unit
A3	Illuminated LED unit
A4	Multi Color LED Unit
A5	Extender
A6	Base unit DC
A7	Base unit AC
A8	Flexible option
A9	Mounting plate
A10	Mounting Pole
A11	Adjustment pole


## Modular Tower Lights Mounting



- Gasket
- (1) (2) (3) Screw x 4 (unattached) M5 x (thickness+10 mm /0.39 in.)

#### Flexible Option Mounting

## Recommended Mounting



## No Recommended Mounting

