


## KBC16DCF40

Canalis - tap-off unit for NF fuses - 8.5 x 31.5 - 16 A  
- fixed polarity

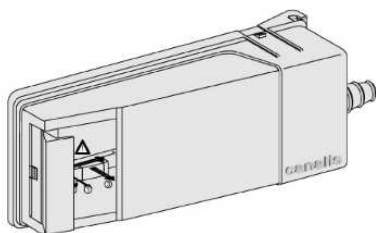

### Main

Range of product	Canalis
Product or component type	Tap-off unit
Product compatibility	KBA KBB KDP

### Complementary

Device application	Lighting
[Ue] rated operational voltage	230...400 V
[Ui] rated insulation voltage	690 V
[Ie] rated operational current	16 A at 35 °C
Network frequency	50/60 Hz
Busbar trunking polarity	L2 + L1 + L3 + N + PE
Protection type	Fuse
Fuse type	Cylindrical: 8.5 x 31.5 mm - gG conforming to NF
Tap-off unit polarity	3L+N
Tap-off unit connector type	With fixed polarity
Provided equipment	Fuse not supplied
Standards	EN/IEC 60439-2 EN/IEC 61439-6
Width	205 mm
Depth	38 mm
Height	68 mm
Product weight	90 g

### Environment

IP degree of protection	IP55 conforming to EN/IEC 60529
-------------------------	---------------------------------

### Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 1012 - Schneider Electric declaration of conformity
Product end of life instructions	Need no specific recycling operations

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.