


ASISSLE4

AS-Interface - for Ø 22 emergency stop mounting in enclosure - metal

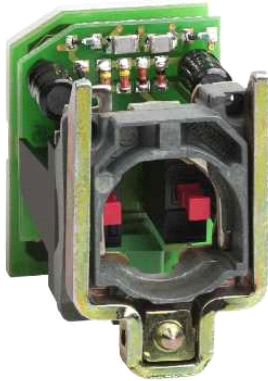

Main

Product or component type	Interface for Ø 22 emergency stop mounting in enclosure
Range compatibility	AS-Interface cabling system
Product mounting	In enclosure
Fixing collar material	Metal
Number of contacts	2
AS-i profile	0.B.F.F
Supply	Via AS-Interface

Complementary

Addressing	Using adjustment terminal
[Us] rated supply voltage	24 V DC (- 15...15 %)
Power consumption	1.2 W
Current consumption	45 mA AS-Interface line
Connections - terminals	1 connector for AS-Interface line
Product weight	0.06 kg

Environment

Standards	EN 1088/ISO 14119 EN 574/ISO 13851 EN 954-1 category 4 EN/IEC 60204-1 EN/IEC 60947-5-3 EN/IEC 61496-1 EN/ISO 12100 EN/ISO 13850 ISO 13849-1 category 4
Product certifications	CSA UL
IP degree of protection	IP00 conforming to IEC 60529
Ambient air temperature for operation	-10...55 °C
Ambient air temperature for storage	-25...85 °C
Shock resistance	10 gn
Vibration resistance	5 gn

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.