

## Main

Range	TeSys
Product name	TeSys GS
Device short name	GS2L
Product or component type	Switch-disconnector-fuse
Poles description	3P
Protected poles description	3t
Contacts type and composition	3 NO
[Ith] conventional free air thermal current	160 A at 40 °C
[Ie] rated operational current	125 A at 440 V 2 poles in series per phase on DC-23A 125 A at 440 V 2 poles in series per phase on DC-23B 160 A at 400 V on AC-23A 160 A at 400 V on AC-23B 160 A at 500 V on AC-23A 160 A at 500 V on AC-23B 125 A at 690 V on AC-23A 125 A at 690 V on AC-23B
Fuse type	BS
Fuse size	A4
Network type	AC DC
Network frequency	50/60 Hz

## Complementary


Type of operating handle	External frontal External right side
Mounting support	Plate
[Ui] rated insulation voltage	750 V AC 50/60 Hz
[Uimp] rated impulse withstand voltage	8 kV
Rated operational power in W	110 kW at 500 V 110 kW at 690 V 80 kW at 400 V
Making capacity	1600 A at 400 V on AC-23B
[Icm] rated short-circuit making capacity	80 kA at 400 V with protection by gG fuses
Breaking capacity	1280 A at 400 V on AC-23B
Short-circuit withstand	22.7 kA
Mechanical durability	10000 cycles
Electrical durability	On DC-23A On DC-23B On AC-23A On AC-23B
Connections - terminals	Power circuit : bars cable 20 mm <sup>2</sup> Power circuit : lugs-ring terminals cable 50...95 mm <sup>2</sup>
Tightening torque	Power circuit : 12 N.m

## Environment


Standards	IEC 60947-3
Product certifications	CE
IP degree of protection	IP20 with terminal cover conforming to IEC 60529
Ambient air temperature for operation	-20...70 °C
Ambient air temperature for storage	-40...80 °C
Fire resistance	960 °C body conforming to IEC 60695-2-1 850 °C fuse cover conforming to IEC 60695-2-1

Height	190 mm
Width	162 mm
Depth	136.5 mm
Product weight	1.8 kg

### Door Cut-out - For External Front-mounted Operator

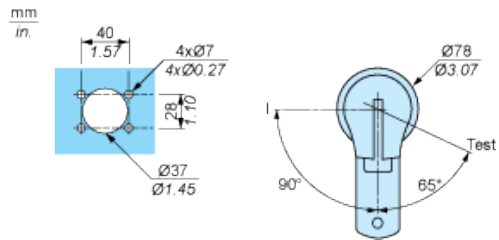

### Door Cut-out - For External RH Side-mounted Operator

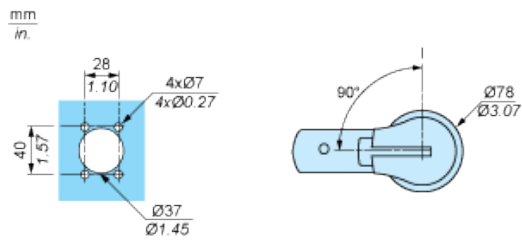

### 3-pole GS

