


GS2S3

TeSys GS - switch-disconnector-fuse - 3 P - 630A -
DIN 3

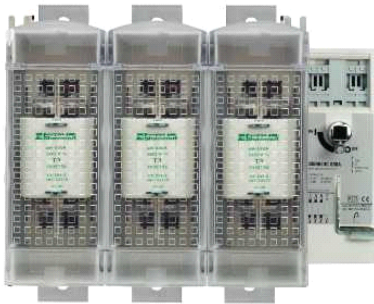

Main

Range	TeSys
Product name	TeSys GS
Device short name	GS2S
Product or component type	Switch-disconnector-fuse
Poles description	3P
Protected poles description	3t
Contacts type and composition	3 NO
[Ith] conventional free air thermal current	630 A at 40 °C
[Ie] rated operational current	315 A at 690 V on AC-23A 400 A at 440 V 2 poles in series per phase with terminal covers on DC-23A 400 A at 690 V on AC-23B 500 A at 500 V on AC-23A 500 A at 500 V on AC-23B 630 A at 400 V on AC-23A 630 A at 400 V on AC-23B 630 A at 440 V 2 poles in series per phase with terminal covers on DC-23B
Fuse type	DIN
Fuse size	3
Network type	AC DC
Network frequency	50/60 Hz

Complementary

Type of operating handle	Direct frontal External frontal External right side
Mounting support	Plate
[Ui] rated insulation voltage	1000 V AC 50/60 Hz
[Uimp] rated impulse withstand voltage	12 kV
Rated operational power in W	295 kW at 690 V 355 kW at 400 V 355 kW at 500 V 400 kW at 690 V
Making capacity	6300 A at 400 V on AC-23B
[Icm] rated short-circuit making capacity	100 kA at 400 V with protection by gG fuses
Breaking capacity	5040 A at 400 V on AC-23B
Short-circuit withstand	70 kA
Mechanical durability	8000 cycles
Electrical durability	On DC-23A On DC-23B On AC-23A On AC-23B
Connections - terminals	Power circuit : bars cable 63 mm ² Power circuit : lugs-ring terminals 2 cable 150 mm ² Power circuit : lugs-ring terminals 2 cable 300 mm ²
Tightening torque	Power circuit : 44 N.m


Environment

Standards	IEC 60947-3
Product certifications	CE


The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

IP degree of protection	IP20 with terminal cover conforming to IEC 60529
Ambient air temperature for operation	-20...70 °C
Ambient air temperature for storage	-40...80 °C
Fire resistance	960 °C body conforming to IEC 60695-2-1 850 °C fuse cover conforming to IEC 60695-2-1
Height	364 mm
Width	300 mm
Depth	250 mm
Product weight	16 kg

Door Cut-out - For External Front-mounted Operator

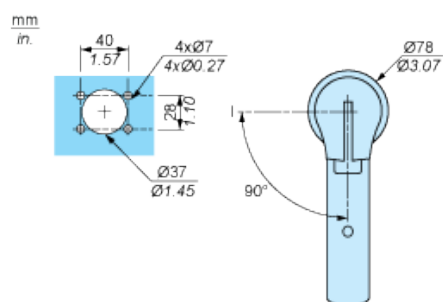

Door Cut-out - For External RH Side-mounted Operator

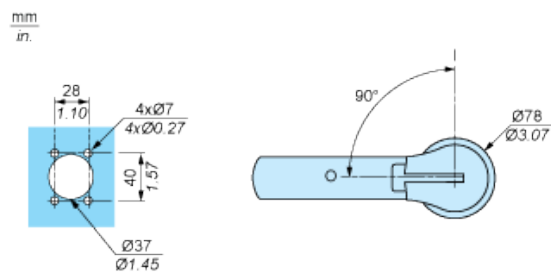

3-pole GS

