



## Safety light curtains deTec4 Core

C4C-EA09030A10000, C4C-SA09030A10000





## Receiver

Model Name > [C4C-EA09030A10000](#)  
Part No. > [1211516](#)

## Sender

Model Name > [C4C-SA09030A10000](#)  
Part No. > [1211498](#)

### At a glance

- Type 4 (IEC 61496), PL e (EN ISO 13849)
- Protective operation
- Absence of blind zones
- Resolution of 14 mm or 30 mm
- Protective field height of 300 mm to 2,100 mm
- Automatic range measurement of up to 10 m
- Ambient operating temperature of -30 °C to +55 °C
- Enclosure rating IP 65 / IP 67

### Your benefits

- Simple assembly with innovative mounting and no blind zones
- Quick commissioning thanks to integrated LED display and automatic range measurement of up to 10 m
- Simply safe: rugged and reliable thanks to enclosure rating IP 67 and an ambient operating temperature down to -30 °C, enabling use in harsh ambient conditions
- Intelligently standardized: M12, 5-pin provide cost reductions
- Basic function without configuration effort enables quick replacement when servicing is required



## Technical Data-Sender

---

Protective field height:	900 mm
Resolution:	30 mm
Protective field range:	0 m ... 10 m
Housing cross-section:	34 mm x 30.7 mm
Type:	Type 4 (EN 61496)
Safety integrity level:	SIL3 (IEC 61508) SILCL3 (EN 62061)
Category:	category 4 (EN ISO 13849)
Performance level:	PL e (EN ISO 13849)
PFHd:	3,7 x 10 <sup>-9</sup> (EN ISO 13849)
TM (mission time):	20 a (EN ISO 13849)
Safe state in the event of a fault:	at least one OSSD is in the LOW state
Synchronization:	optical synchronisation
Supply voltage:	24 V DC (19.2 V DC ... 28.8 V DC)
Residual ripple:	≤ 2.4 Vpp <sup>1)</sup>
Power consumption typical:	1.01 W
Connection type:	M12, 5-pin
Cable length:	50 m
Protection class:	III (EN 50178)
Enclosure rating:	IP 65 (EN 60529) IP 67 (EN 60529)
Ambient operating temperature:	-30 °C ... 55 °C
Storage temperature:	-30 °C ... 70 °C
Air humidity:	15 % ... 95 %, non-condensing
Vibration resistance:	5 g, 10 Hz ... 55 Hz (EN 60068-2-6)
Shock resistance:	10 g, 16 ms (EN 60068-2-29)
Weight:	840 g

<sup>1)</sup> Within the limits of  $V_S$

## Technical Data-Receiver


---

Protective field height:	900 mm
Resolution:	30 mm
Protective field range:	0 m ... 10 m
Housing cross-section:	34 mm x 30.7 mm
Type:	Type 4 (EN 61496)
Safety integrity level:	SIL3 (IEC 61508) SILCL3 (EN 62061)
Category:	category 4 (EN ISO 13849)
Performance level:	PL e (EN ISO 13849)
PFHd:	3,7 x 10 <sup>-9</sup> (EN ISO 13849)
TM (mission time):	20 a (EN ISO 13849)
Safe state in the event of a fault:	at least one OSSD is in the LOW state
Synchronization:	optical synchronisation
Supply voltage:	24 V DC (19.2 V DC ... 28.8 V DC)
Residual ripple:	≤ 2.4 Vpp <sup>1)</sup>
Power consumption typical:	2.02 W
Safety outputs:	OSSDs
Type of output:	2 PNP semiconductors, short-circuit protected, cross-circuit monitored <sup>2)</sup>

Response time:	11 ms
Switching voltage HIGH:	24 V DC (VS - 2.25 V DC ... VS)
Switching voltage LOW:	2 V DC
Switching current:	300 mA
Connection type:	M12, 5-pin
Cable length:	50 m
Protection class:	III (EN 50178)
Enclosure rating:	IP 65 (EN 60529) IP 67 (EN 60529)
Ambient operating temperature:	-30 °C ... 55 °C
Storage temperature:	-30 °C ... 70 °C
Air humidity:	15 % ... 95 %, non-condensing
Vibration resistance:	5 g, 10 Hz ... 55 Hz (EN 60068-2-6)
Shock resistance:	10 g, 16 ms (EN 60068-2-29)
Weight:	850 g

1) Within the limits of  $V_S$  2) Applies to the voltage range between -30 V and +30 V

### Dimensional drawing

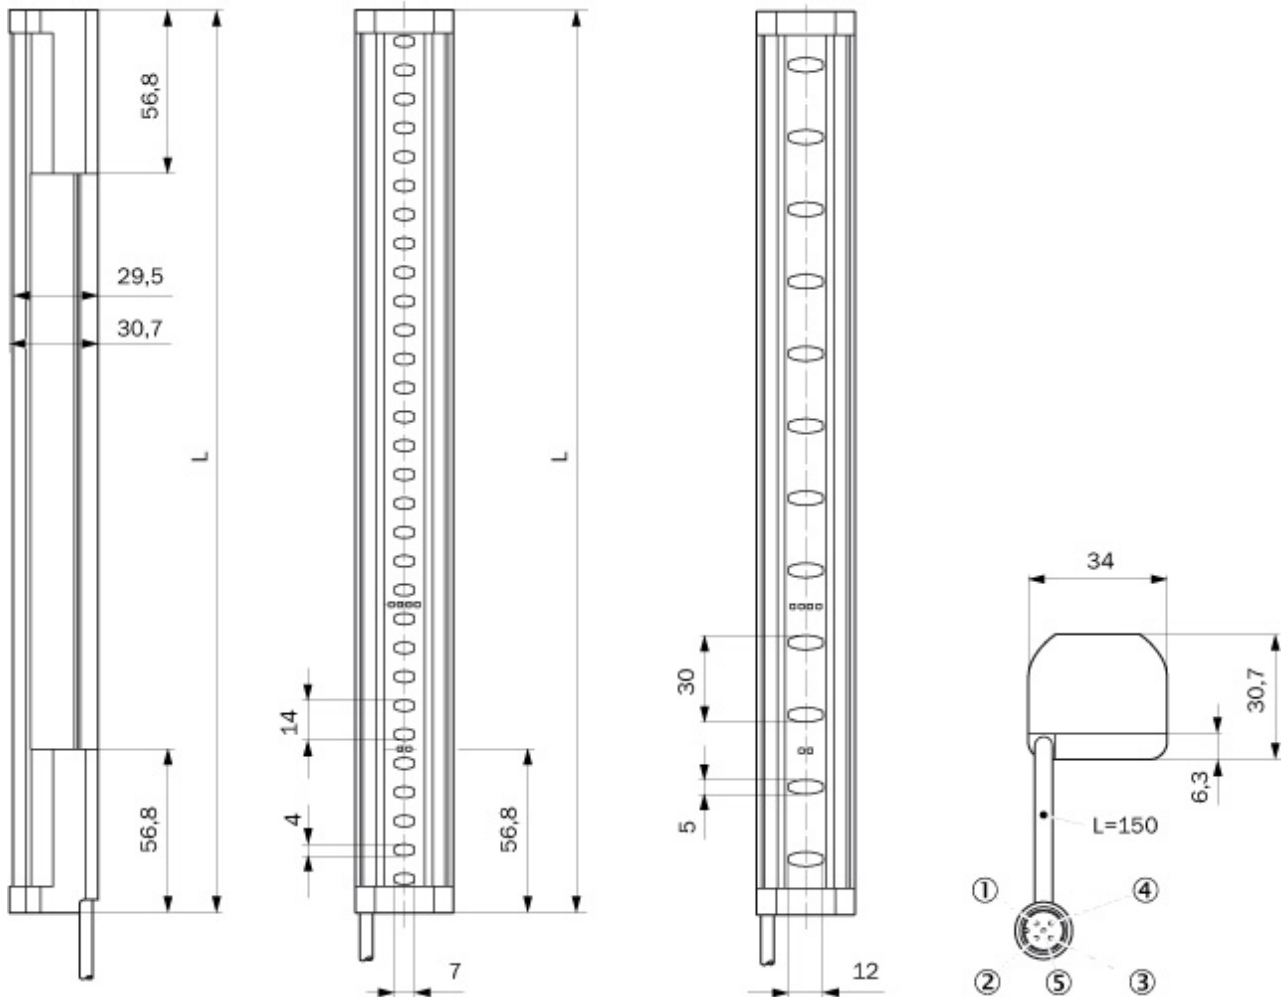

**Australia**

Phone +61 3 9457 0600  
1800 334 802 – tollfree  
E-Mail sales@sick.com.au

**Belgium/Luxembourg**

Phone +32 (0)2 466 55 66  
E-Mail info@sick.be

**Brasil**

Phone +55 11 3215-4900  
E-Mail sac@sick.com.br

**Canada**

Phone +1 905 771 14 44  
E-Mail information@sick.com

**Ceská Republika**

Phone +420 2 57 91 18 50  
E-Mail sick@sick.cz

**China**

Phone +86 4000 121 000  
E-Mail info.china@sick.net.cn  
Phone +852-2153 6300  
E-Mail ghk@sick.com.hk

**Danmark**

Phone +45 45 82 64 00  
E-Mail sick@sick.dk

**Deutschland**

Phone +49 211 5301-301  
E-Mail kundenservice@sick.de

**España**

Phone +34 93 480 31 00  
E-Mail info@sick.es

**France**

Phone +33 1 64 62 35 00  
E-Mail info@sick.fr

**Great Britain**

Phone +44 (0)1727 831121  
E-Mail info@sick.co.uk

**India**

Phone +91-22-4033 8333  
E-Mail info@sick-india.com

**Israel**

Phone +972-4-6801000  
E-Mail info@sick-sensors.com

**Italia**

Phone +39 02 27 43 41  
E-Mail info@sick.it

**Japan**

Phone +81 (0)3 3358 1341  
E-Mail support@sick.jp

**Magyarország**

Phone +36 1 371 2680  
E-Mail office@sick.hu

**Nederlands**

Phone +31 (0)30 229 25 44  
E-Mail info@sick.nl

**Norge**

Phone +47 67 81 50 00  
E-Mail austefjord@sick.no

**Österreich**

Phone +43 (0)22 36 62 28 8-0  
E-Mail office@sick.at

**Polska**

Phone +48 22 837 40 50  
E-Mail info@sick.pl

**România**

Phone +40 356 171 120  
E-Mail office@sick.ro

**Russia**

Phone +7-495-775-05-30  
E-Mail info@sick.ru

**Schweiz**

Phone +41 41 619 29 39  
E-Mail contact@sick.ch

**Singapore**

Phone +65 6744 3732  
E-Mail admin@sicksgp.com.sg

**Slovenija**

Phone +386 (0)1-47 69 990  
E-Mail office@sick.si

**South Africa**

Phone +27 11 472 3733  
E-Mail info@sickautomation.co.za

**South Korea**

Phone +82 2 786 6321/4  
E-Mail info@sickkorea.net

**Suomi**

Phone +358-9-25 15 800  
E-Mail sick@sick.fi

**Sverige**

Phone +46 10 110 10 00  
E-Mail info@sick.se

**Taiwan**

Phone +886-2-2375-6288  
E-Mail sales@sick.com.tw

**Türkiye**

Phone +90 (216) 528 50 00  
E-Mail info@sick.com.tr

**United Arab Emirates**

Phone +971 (0) 4 8865 878  
E-Mail info@sick.ae

**USA/México**

Phone +1(952) 941-6780  
1 800-325-7425 – tollfree  
E-Mail info@sickusa.com

More representatives and agencies  
at [www.sick.com](http://www.sick.com)