


# MIX80 Air-air heat exchangers

Characteristics	M.U.	MIX80BX0B	MIX80CX0B
Specific cooling power	W/K	80	80
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Width	mm	317	317
Height	mm	1260	1260
Depth	mm	108	108
Max. current	A	1,06	2,1
Fuse T	A	2	4
Absorbed electric power	W	240	255
Duty cycle	-	100%	100%
External fan air flow	m <sup>3</sup> /h	1050	1050
Enclosure fan air flow	m <sup>3</sup> /h	1050	1050
Temperature limits	°C	-5 +55	-5 +55
Protection level EN60529 - enclosure side	-	IP54	IP54
Noise level	dB (A)	75	75
Weight	Kg	17	17
Conformity	-	CE	CE
Colour	-	RAL 7035 orange peel effect	


Accessories/Options	
0-60°C thermostat, NO 10A	AAFTO12
5-60°C thermostat, change-over contact 10A	AAWTS10
Stainless steel version	
Special paint on request	



## Dimensions

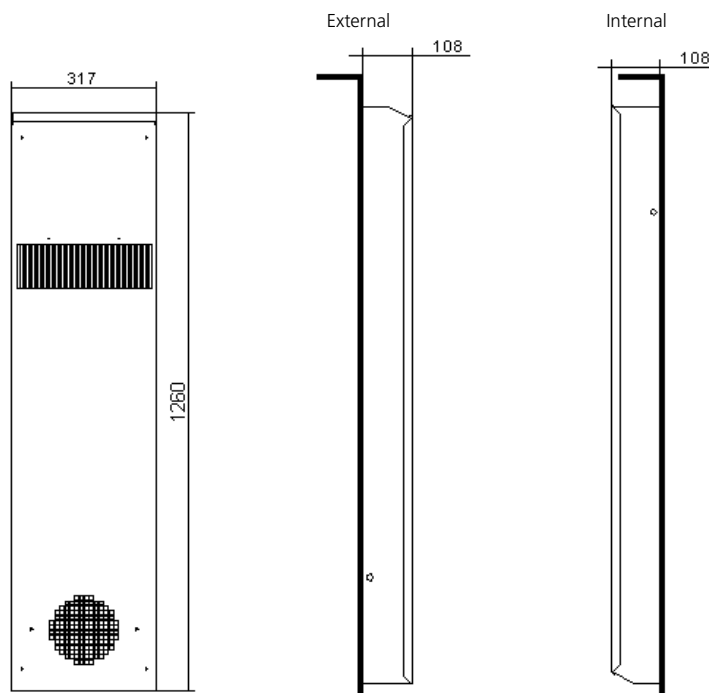

## Performances

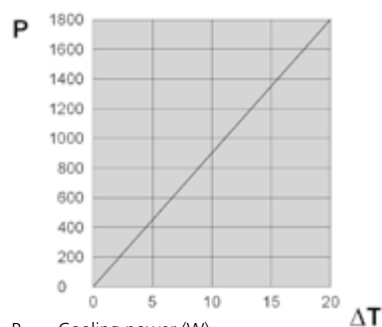

P = Cooling power (W)  
 $\Delta T$  = Differential temperature (Tin-Tex) (K)