






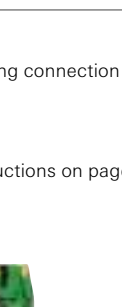

### WKFN 2,5 SL/35

- Ground block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm<sup>2</sup>
- Ex e I/II  II 2GD IM2  
Follow the EX installation instructions on page 143









Description	Type	Part No.	Std. Pack
Ground block, green/yellow	WKFN 2,5 SL/35	56.703.9055.0	100
<b>General data</b>			
Width / length / height, incl. TS 7.5	5 mm / 47 mm / 38 mm		
Wire strip length	11 mm		
Approvals	PTB      PTB 04 ATEX 1051 U		
<b>Technical data</b>	<b>IEC</b>	<b>UL</b>	<b>CSA</b> 
	EN 60 947-7-2		EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm <sup>2</sup>		0.2–2.5 mm <sup>2</sup>
Cross section solid/stranded	0.13–4 mm <sup>2</sup>		0.13–4 mm <sup>2</sup>
Cross section, AWG	22–12		24–12
Rated current			
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
<b>Accessories</b>			
End plate, gray	Type	Part No.	Std. Pack
	APFN 2,5	07.312.6755.0	10

### WKFN 2,5 D1/2/SL/35

- Duo-Ground block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm<sup>2</sup>
- Ex e I/II  II 2GD IM2  
Follow the EX installation instructions on page 143









Description	Type	Part No.	Std. Pack
Ground block, green/yellow	WKFN 2,5 D1/2/SL/35	56.703.9355.0	100
<b>General data</b>			
Width / length / height, incl. TS 7.5	5 mm / 60 mm / 38 mm		
Wire strip length	11 mm		
Approvals	PTB      PTB 04 ATEX 1051 U		
<b>Technical data</b>	<b>IEC</b>	<b>UL</b>	<b>CSA</b> 
	EN 60 947-7-2		EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm <sup>2</sup>		0.2–2.5 mm <sup>2</sup>
Cross section solid/stranded	0.13–4 mm <sup>2</sup>		0.13–4 mm <sup>2</sup>
Cross section, AWG	22–12		24–12
Rated current			
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
<b>Accessories</b>			
End plate, gray	Type	Part No.	Std. Pack
	APFN 2,5 D1/2	07.312.6955.0	10


### WKFN 2,5 D2/2/SL/35

- Duo ground block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm<sup>2</sup>
- Ex e I/II  II 2GD IM2  
Follow the EX installation instructions on page 143



Description	Type	Part No.	Std. Pack
Ground block, green/yellow	WKFN 2,5 D2/2/SL/35	56.703.9155.0	100
<b>General data</b>			
Width / length / height, incl. TS 7.5	5 mm / 72 mm / 38 mm		
Wire strip length	11 mm		
Approvals	PTB      PTB 04 ATEX 1051 U		
<b>Technical data</b>	<b>IEC</b>	<b>UL</b>	<b>CSA</b> 
	EN 60 947-7-2		EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm <sup>2</sup>		0.2–2.5 mm <sup>2</sup>
Cross section solid/stranded	0.13–4 mm <sup>2</sup>		0.13–4 mm <sup>2</sup>
Cross section, AWG	22–12		24–12
Rated current			
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
<b>Accessories</b>			
End plate, gray	Type	Part No.	Std. Pack
	APFN 2,5 D2/2	07.312.7155.0	10

## Accessories for *fasis* WKFN 2,5...

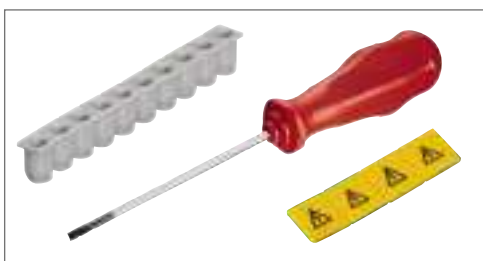

Accessories	Type	Part No.	Std. Pack
Wire entry guide	0.13–0.2 mm <sup>2</sup>	LELN 2,5/1 WEISS	05.564.3755.0
	0.25–0.5 mm <sup>2</sup>	LELN 2,5/2 GRAU	05.564.3855.0
	0.75–1.0 mm <sup>2</sup>	LELN 2,5/3 SCHWARZ	05.564.3955.0
Cover with warning symbol over 4 blocks	yellow	ADFN 2,5/4 GELB	04.343.8353.8
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0