


Rated values are for adjacent modular terminals of the same range and size. See **facts & DATA** for the current carrying capacity of the mounting rail.

WKF 6 SL/35


finely stranded single core V A
 0.5 – 6 mm² 0.5 – 6 mm² 800 V/8 kV/3 41
 No. 20-10 AWG 600 V
 No. 20-10 AWG 600 V
 8 mm 12 mm

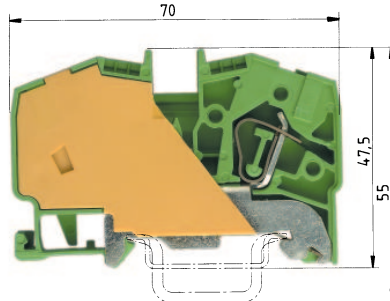

Rated values are for adjacent modular terminals of the same range and size. See **facts & DATA** for the current carrying capacity of the mounting rail.

WKF 10 SL/35

finely stranded single core V A
 2.5 – 10 mm² 2.5 – 10 mm² 800 V/8 kV/3 57
 No. 14-8 AWG 600 V
 No. 14-8 AWG 600 V
 10 mm 13 mm

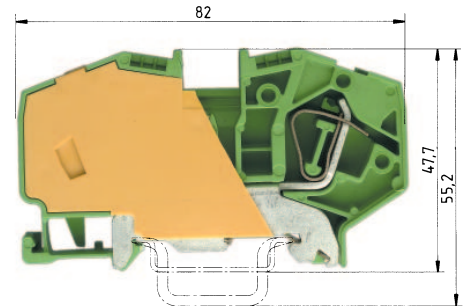

Rated values are for adjacent modular terminals of the same range and size. See **facts & DATA** for the current carrying capacity of the mounting rail.

WKF 16 SL/35

finely stranded stranded V A
 4 – 16 mm² 4 – 16 mm² 800 V/8 kV/3 76
 No. 12-6 AWG 600 V
 No. 12-6 AWG 600 V
 12 mm 15 mm

Type	Part No.	Box Qty	Type	Part No.	Box Qty	Type	Part No.	Box Qty
WKF 6 SL/35	56.706.9053.0	100	WKF 10 SL/35	56.710.9053.0	50	WKF 16 SL/35	56.716.9053.0	50
35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1	35x27x7,5 EN 60715	98.300.0000.0	1
35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1	35x24x15 EN 60715	98.360.0000.0	1
9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100	9708/2 S35	Z5.522.8553.0	100
WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100	WEF 1/35	Z5.523.9353.0	100
DIN 5264 B 0,8x4	06.502.4100.0	5	DIN 5264 B 0,8x4	06.502.4100.0	5	DIN 5264 B 1x5,5	06.502.4200.0	5
Please see note on page 17			Please see note on page 17			Please see note on page 17		