



## Connector for cables of Ø 6 – 10 mm and 10 – 14 mm

### Female connector

Unmounted with cable gland.

Crimp contacts separately available under Accessories

See the Technical Data for sheath and insulation strip lengths.

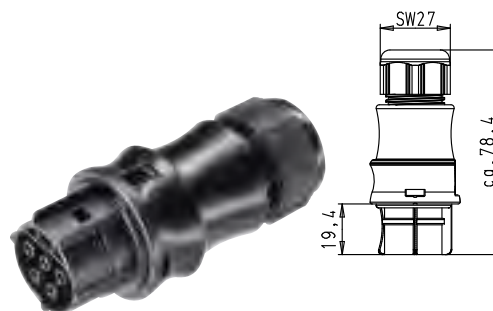


Application	Coding	Cable diameter in mm	Color	Part No.	Part No.	
				<b>with screw connection<sup>1)</sup></b>	<b>with crimp connection (see Accessories)</b>	
				Wire	Wire	
				rigid	fine-stranded	
				fine-stranded	stranded	
				0.75 – 4.0	0.75 – 4.0	
				without ferrules		
Power 250/400 V		⊕, N, 3, 2, 1	6 – 10	gray	96.051.4053.0	96.151.0053.0
			10 – 14	black	96.051.4053.1	96.151.0053.1
				gray	96.051.4153.0	96.151.0153.0
				black	96.051.4153.1	96.151.0153.1
Power 250 V + Dimming		L, ⊕, N, D1, D2	6 – 10	turquoise	96.051.4053.6	96.151.0053.6
			10 – 14		96.051.4153.6	96.151.0153.6
Switch.func. 250 V		1, 2, 3, 4, 5	6 – 10	blue	96.051.4053.9	96.151.0053.9
			10 – 14		96.051.4153.9	96.151.0153.9
Extra-low voltage		1, 2, 3, 4, 5	6 – 10	brown	96.051.4051.4	96.151.0051.4
			10 – 14		96.051.4151.4	96.151.0151.4

### Male connector

Unmounted with cable gland and locking device.

Crimp contacts separately available under Accessories

See the Technical Data for sheath and insulation strip lengths.



Application	Coding	Cable diameter in mm	Color	Part No.	Part No.	
				<b>with screw connection<sup>1)</sup></b>	<b>with crimp connection (see Accessories)</b>	
				Wire	Wire	
				rigid	fine-stranded	
				fine-stranded	stranded	
				0.75 – 4.0	0.75 – 4.0	
				without ferrules	Locking device	
				yes	yes	
Power 250/400 V		⊕, N, 3, 2, 1	6 – 10	gray	96.052.4053.0	96.152.0053.0
			10 – 14	black	96.052.4053.1	96.152.0053.1
				gray	96.052.4153.0	96.152.0153.0
				black	96.052.4153.1	96.152.0153.1
Power 250 V + Dimming		L, ⊕, N, D1, D2	6 – 10	turquoise	96.052.4053.6	96.152.0053.6
			10 – 14		96.052.4153.6	96.152.0153.6
Switch.func. 250 V		1, 2, 3, 4, 5	6 – 10	blue	96.052.4053.9	96.152.0053.9
			10 – 14		96.052.4153.9	96.152.0153.9
Extra-low voltage		1, 2, 3, 4, 5	6 – 10	brown	96.052.4051.4	96.152.0051.4
			10 – 14		96.052.4151.4	96.152.0151.4