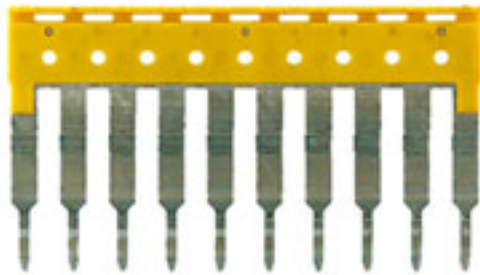


**Z-series, Accessories**  
**ZQV 2.5/10****Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

Weidmüller offers users of modular terminals of the Z-Series a comprehensive range of accessories that render possible appropriate solutions for all - even non-standard - tasks.

The accessories must comply with the same quality standards as the modular terminals themselves.

**General ordering data**

|            |   |
|------------|---|
| Type       | ZQV 2.5/10  |
| Order No.  | <a href="#">1608940000</a>  |
| Version    | Z-series, Accessories, Cross-connector, For the terminals, No. of poles: 10 |
| GTIN (EAN) | 4008190099060   |
| Qty.       | 20 pc(s).   |

## Z-series, Accessories ZQV 2.5/10

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technische Daten

### Dimensions and weights

|        |         |            |         |
|--------|---------|------------|---------|
| Length | 49.3 mm | Width      | 2.8 mm  |
| Height | 27.6 mm | Net weight | 6.724 g |

### Temperatures

|                                  |        |                                  |        |
|----------------------------------|--------|----------------------------------|--------|
| Operating temperature            |        | Storage temperature              |        |
| Continuous operating temp., min. | -50 °C | Continuous operating temp., max. | 120 °C |

### Additional technical data

|                          |                   |                     |                 |
|--------------------------|-------------------|---------------------|-----------------|
| Explosion-tested version | No                | Installation advice | Direct mounting |
| Version                  | For the terminals |                     |                 |

### Rated data

|               |      |
|---------------|------|
| Rated current | 24 A |
|---------------|------|

### Material data

|                           |       |        |        |
|---------------------------|-------|--------|--------|
| Material                  | Wemid | Colour | Yellow |
| UL 94 flammability rating | V-0   |        |        |

### System specifications

|                |                       |
|----------------|-----------------------|
| Product family | Z-series, Accessories |
|----------------|-----------------------|

### Classifications

|            |             |            |             |
|------------|-------------|------------|-------------|
| ETIM 3.0   | EC000489    | UNSPSC     | 30-21-18-01 |
| eClass 5.1 | 27-14-11-40 | eClass 6.2 | 27-14-11-40 |
| eClass 7.1 | 27-14-11-40 |            |             |

### Approvals

Approvals



|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|