

**CABTITE KEL 16/8****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

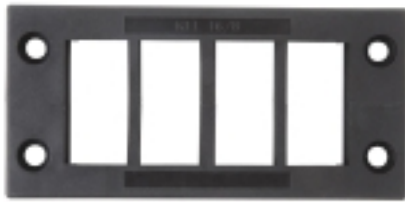

Cabtite enables you to feed pre-assembled lines through the electrical cabinet wall while maintaining IP54-level protection. As the cable does not have to be split, the manufacturer's guarantee is not invalidated.

**General ordering data**

Type	CABTITE KEL 16/8
Order No.	<a href="#">1825910000</a>
Version	Cable entry strips, Plastic
GTIN (EAN)	4032248328628
Qty.	10 pc(s).

## CABTITE KEL 16/8

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technische Daten

### Dimensions and weights

Length	120 mm	Width	58 mm
Height	17 mm	Depth	17 mm
Net weight	88.4 g		

### General information

Clamping range, max.	0 mm	Clamping range, min.	0 mm
Material	Plastic	Operating temperature range, max.	140 °C
Operating temperature range, min.	-40 °C		

### Classifications

ETIM 3.0	EC000441	UNSPSC	30-21-18-01
eClass 5.1	27-14-92-01	eClass 6.2	27-14-92-01
eClass 7.1	27-14-92-01		

### Approvals

Approvals	
ROHS	Conform