

CABTITE KEL 16/5**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

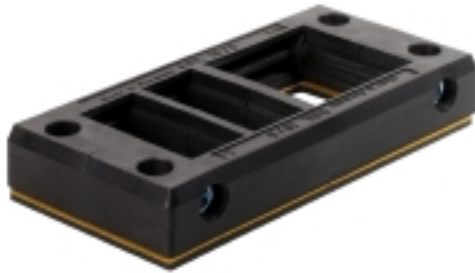

Cabtite enables you to feed pre-assembled lines through the electrical cabinet wall while maintaining IP54-level protection. As the cable does not have to be split, the manufacturer's guarantee is not invalidated.

General ordering data

Type	CABTITE KEL 16/5
Order No.	1849770000
Version	Cable entry strips, Plastic
GTIN (EAN)	4032248378388
Qty.	10 pc(s).

CABTITE KEL 16/5

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technische Daten**Dimensions and weights**

Length	120 mm	Width	58 mm
Height	17 mm	Depth	17 mm
Net weight	94.9 g		

General information

Clamping range, max.	0 mm	Clamping range, min.	0 mm
Material	Plastic	Operating temperature range, max.	140 °C
Operating temperature range, min.	-40 °C		

Classifications

ETIM 3.0	EC000441	UNSPSC	30-21-18-01
eClass 5.1	27-14-92-01	eClass 6.2	27-14-92-01
eClass 7.1	27-14-92-01		

Approvals

Approvals	
ROHS	Conform