


**Crimping contact
HDC-C-M3-BM6.0AG**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com



Crimps provide a electrical and mechanical connection between wire and contact that is both secure and reliable. The optimal crimp connection is gas-tight and corrosion-resistant.

General ordering data

| | |
|------------|--|
| Type | HDC-C-M3-BM6.0AG |
| Order No. | 1682290000 |
| Version | Heavy Duty Connectors, Contact, CM 3, Female, Conductor cross-section, max.: 6, turned, Copper alloy |
| GTIN (EAN) | 4008190474027 |
| Qty. | 100 pc(s). |

Datenblatt

**Crimping contact
HDC-C-M3-BM6.0AG**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technische Daten

Dimensions and weights

| | | | |
|------------|--------|----------|--------|
| Net weight | 3.05 g | Diameter | 6.1 mm |
|------------|--------|----------|--------|

General data

| | | | |
|------------------------------------|------------------|--------------------|--------------|
| Contact diameter, male Ø | 3.6 mm | Production methods | turned |
| Stripping length, rated connection | 10 mm | Type | Female |
| Type of connection | Crimp connection | Material | Copper alloy |
| Surface finish | silver | Volume resistance | ≤ 1 mΩ |

Classifications

| | | | |
|------------|-------------|------------|-------------|
| ETIM 3.0 | EC000796 | UNSPSC | 30-21-18-01 |
| eClass 5.1 | 27-14-34-19 | eClass 6.2 | 27-26-12-02 |
| eClass 7.1 | 27-44-02-04 | | |

Product information

| | |
|------------------------------|---|
| Descriptive text accessories | For further accessories, see chapter J - tools, see chapter K |
|------------------------------|---|

Approvals

Approvals




| | |
|------|---------|
| ROHS | Conform |
|------|---------|

**Crimping contact
HDC-C-M3-BM6.0AG**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Zeichnungen

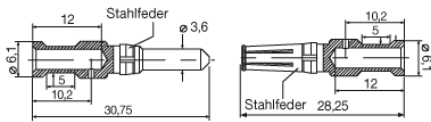

| Leiterquerschnitt | Abisolierlänge | |
|-----------------------|----------------|-------|
| 1,50 mm ² | AWG 16 | 10 mm |
| 2,50 mm ² | AWG 14 | 10 mm |
| 4,00 mm ² | AWG 12 | 10 mm |
| 6,00 mm ² | AWG 10 | 10 mm |
| 10,00 mm ² | AWG 7 | 10 mm |

