


**Crimping contact
HDC-C-M3-SM6.0AG**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com



Crimps provide a electrical and mechanical connection between wire and contact that is both secure and reliable. The optimal crimp connection is gas-tight and corrosion-resistant.

General ordering data

Type	HDC-C-M3-SM6.0AG
Order No.	1682280000
Version	Heavy Duty Connectors, Contact, CM 3, Male, Conductor cross-section, max.: 6, turned, Copper alloy
GTIN (EAN)	4008190474010
Qty.	100 pc(s).

Datenblatt

**Crimping contact
HDC-C-M3-SM6.0AG**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technische Daten

Dimensions and weights

Net weight	3.53 g	Diameter	6.1 mm
------------	--------	----------	--------

General data

Contact diameter, male Ø	3.6 mm	Production methods	turned
Stripping length, rated connection	10 mm	Type	Male
Type of connection	Crimp connection	Material	Copper alloy
Surface finish	silver	Volume resistance	≤ 1 mΩ

Classifications

ETIM 3.0	EC000796	UNSPSC	30-21-18-01
eClass 5.1	27-14-34-19	eClass 6.2	27-26-12-02
eClass 7.1	27-44-02-04		

Product information

Descriptive text accessories	For further accessories, see chapter J - tools, see chapter K
------------------------------	---

Approvals

Approvals




ROHS	Conform
------	---------

Datenblatt

**Crimping contact
HDC-C-M3-SM6.0AG**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Zeichnungen

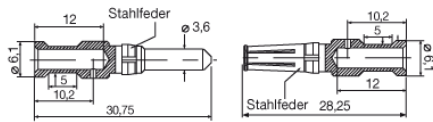

Leiterquerschnitt	Abisolierlänge	
1,50 mm ²	AWG 16	10 mm
2,50 mm ²	AWG 14	10 mm
4,00 mm ²	AWG 12	10 mm
6,00 mm ²	AWG 10	10 mm
10,00 mm ²	AWG 7	10 mm

