


## P-series PDK 2.5/4 BL

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

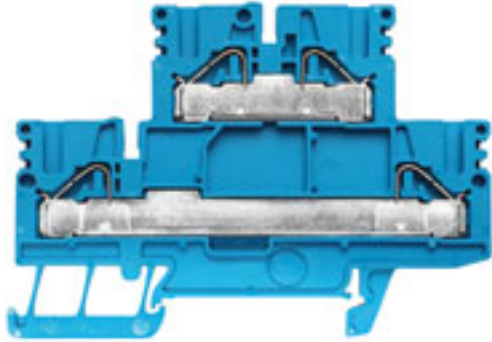

The PDK two-tier modular terminals can feed two potentials in one terminal.

### General ordering data

Type	PDK 2.5/4 BL
Order No.	<a href="#">1918760000</a>
Version	P-series, Feed-through terminal, Double-tier terminal, Rated cross-section: 4 mm <sup>2</sup> , PUSH IN
GTIN (EAN)	4032248554621
Qty.	50 pc(s).

## P-series PDK 2.5/4 BL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technische Daten

### Dimensions and weights

Length	82.5 mm	Width	5.1 mm
Height	58 mm	Height of lowest version	58.5 mm
Net weight	16.32 g		

### Temperatures

Operating temperature		Storage temperature	
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

### Rated data IECEx/ATEX

Certificate No. (ATEX)	KEMA06ATEX0177U	ATEX certificate	IECExKEM06.0032U
ATEX certificate	KEMA06ATEX0177U_e.pdf	Certificate No. (IECEX)	IECExKEM06.0032U
IEC Ex certificate	IECExKEM06.0032U_e.pdf	Max. voltage (ATEX)	550 V
Current (ATEX)	28 A	Wire cross section max. (ATEX)	4 mm <sup>2</sup>
Max. voltage (IECEX)	550 V	Current (IECEX)	28 A
Wire cross section max. (IECEX)	4 mm <sup>2</sup>	Voltage, cross-connection	CrossConnectionGuide.pdf
Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity	Marking EN 60079-7	
Marking ATEX Directive 94/9/EC	II 2 G D		Ex e II

### Additional technical data

Explosion-tested version	No	Open sides	right
Type of mounting	Snap-on	Version	PUSH IN connection, for plug-in cross-connector, One end without connector

### CSA ratings data

Certificate No. (CSA)	200039-1751332	Voltage size B (CSA)	600 V
Voltage size C (CSA)	600 V	Current size B (CSA)	30 A
Current size C (CSA)	30 A	Wire cross section max. (CSA)	10 AWG
Wire cross section min. (CSA)	26 AWG		

## P-series PDK 2.5/4 BL

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technische Daten

### Clampable wires (rated connection)

Type of connection	PUSH IN	Stripping length	12 mm
Blade size	3.0 x 0.5 mm	Number of connections	4
Clamping range, rated connection, min.	0.13 mm <sup>2</sup>	Clamping range, rated connection, max.	6 mm <sup>2</sup>
Gauge to IEC 60947-1	A3	Wire connection cross section, solid core, max. rated connection	0.5 mm <sup>2</sup>
Wire connection cross section, solid core max. rated connection	6 mm <sup>2</sup>	Wire connection cross section, finely stranded, max.	4 mm <sup>2</sup>
Wire connection cross-section, finely stranded, min.	0.5 mm <sup>2</sup>	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm <sup>2</sup>
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	4 mm <sup>2</sup>	Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	0.5 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	4 mm <sup>2</sup>	Twin wire-end ferrules, min.	0.5 mm <sup>2</sup>
Twin wire-end ferrules, max.	1.5 mm <sup>2</sup>	Wire connection cross section AWG, min.	AWG 26
Wire connection cross section AWG, max.	AWG 10		

### Rated data

Rated cross-section	4 mm <sup>2</sup>	Rated voltage	800 V
Rated impulse withstand voltage	8 kV	Rated current	32 A
Current at maximum wires	28 A	Standards	IEC 60947-7-1
Pollution severity	3		

### UL ratings data

Certificate No. (cURus)	E60693	Conductor size Factory wiring max. (cURus)	10 AWG
Conductor size Factory wiring min. (cURus)	26 AWG	Conductor size Field wiring max. (cURus)	10 AWG
Conductor size Field wiring min. (cURus)	26 AWG	Current size B (cURus)	30 A
Current size C (cURus)	30 A	Current size D (cURus)	5 A
Voltage size B (cURus)	600 V	Voltage size C (cURus)	600 V
Voltage size D (cURus)	600 V		

### Material data

Material	Wemid	Colour	Blue
UL 94 flammability rating	V-0		

### System specifications

Product family	P-series	Type of connection	PUSH IN
Number of levels	2	Number of connections	4
No. of clamping points per level	2	Levels cross-connected internally	No
Mounting rail	TS 35	End cover plate required	Yes

**Datenblatt**

**P-series  
PDK 2.5/4 BL**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technische Daten**

**Classifications**

ETIM 3.0	EC000898	UNSPSC	30-21-18-11
eClass 5.1	27-14-11-31	eClass 6.2	27-14-11-90
eClass 7.1	27-14-11-90		

**Product information**

Descriptive text ordering data	For 4 mm <sup>2</sup> conductors, use wire-end ferrules with plastic collars optimised for diameter (No. 9203630000).
Descriptive text technical data	For 2.5 mm <sup>2</sup> 24 A
Descriptive text accessories	Detailed information for working with twin ferrules can be found in the P Series Accessories section.

**Approvals**

Approvals



ROHS Conform