


## RS 100 PF RS 100 OR 2000MM A.1

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

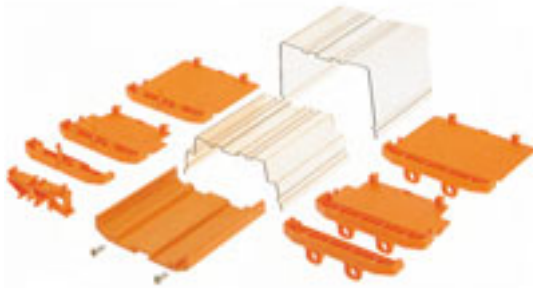

### Flexible - More flexible - Profilform

Modular housings in profile form - the flexible modular system comprising coloured and transparent plastic profiles and carrier modules

The combination of standard pitches mounted side by side in any arrangement and metre goods cut accurate to the millimetre creates the perfect balance between flexibility and economic efficiency:

- Pitch profiles with standard widths ranging from 5mm to 45mm allow the mounting of all standard PCB formats.
- Variable heights ensure maximum component density, even with larger electronics components.
- The different installation variations mean that mounting the enclosure directly is as easy as clipping components onto the terminal rail
- Solid hoods protect the module reliably from external influences

The recipe for success: variable profile + modular form components = flexible enclosure concept that offers a large surface area for the PCBs.

The modular concept is designed for modules with high space requirements and suitable for small component quantities and different widths.

### General ordering data

Type	PF RS 100 OR 2000MM A.1
Order No.	<a href="#">4144870000</a>
Version	Electronics housings, RS 100 Orange, Extruded profile, Width: 109 mm
GTIN (EAN)	4008190377410
Qty.	2 m

## RS 100 PF RS 100 OR 2000MM A.1

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technische Daten

### Dimensions and weights

Length	2,000 mm	Width	109 mm
Height	24 mm	Net weight	560 g

### System characteristics

Version	Extruded profile	Number of PCBs per module	1
PCB thickness	1.6 mm	Tolerance for the PCB shape	±0.2
Cross-connection	No	Contact to terminal rail	No
Protection degree	IP 20	Encapsulation option	No

### Material data

UL 94 flammability rating	V-0	Insulating material	PVC
Colour	Orange	Max. relative humidity during storage	93 %

### Classifications

ETIM 3.0	EC001284	UNSPSC	30-21-18-01
eClass 6.2	27-14-11-43	eClass 7.1	27-14-92-14

### Approvals

Approvals	
ROHS	Conform