


RS-SERIES RS 30 24VDC LD BL/SL 1U

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

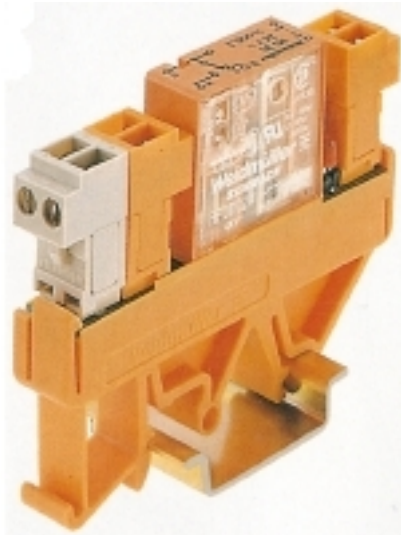

Clip-on RS 30. 31. 32 relay bases are available in widths from 11.2 to 25 mm, depending on the type.
 The RSM relay multiplexers are available as 4, 8 and 16-way modules. To reduce the wiring work, the DC variants are fitted with a common plus or minus potential.
 The optional IEC603-1 plug-in connector enables the connection of pre-assembled lines.
 The screw connection system is used to connect the conductor with a rated cross-section of 2.5 mm².

General ordering data

Type	RS 30 24VDC LD BL/SL 1U
Order No.	1100220000
Version	RS-SERIES, Relays, No. of contacts: 1, CO contact, AgNi 0.15 gold flashed, Rated control voltage: 24 V DC ±10 %, Continuous current: 6 A, Screw connection
GTIN (EAN)	4008190065058
Qty.	10 pc(s).

RS-SERIES RS 30 24VDC LD BL/SL 1U

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technische Daten

Dimensions and weights

Width	11.2 mm	Height	74 mm
Depth	56 mm	Net weight	31.47 g

Temperatures

Humidity	40 °C / 93 % rel. humidity, no condensation	Operating temperature	-25 °C...+40 °C
Storage temperature	-40 °C...+60 °C		

Input

Coil resistance		Protective circuit	Integrated free-wheel diode, Reverse polarity protection
Pull-inrop-out current, typ.	12 mA / 3 mA DC	Rated control voltage	24 V DC ±10 %
Rated current DC	10 mA	Power rating	0.45 W
Pull-inrop-out voltage, typ.	21.5 V DC		

Output

Max. switching voltage, AC	250 V	Continuous current	6 A
Inrush current	8 A	Schaltleistung AC (ohmsch), max.	2000 VA
Schaltleistung DC (ohmsch), max.		Switch-on delay	≤ 8 ms
Switch-off delay	≤ 7 ms	Duration of Bounce	≤ 3 ms
Min. switching power	250 mW	Max. switching frequency at rated load	0.1 Hz

Contact data

No. of contacts	1	Contact design	CO contact
Contact material	AgNi 0.15 gold flashed	Mechanical service life	20 x 10 ⁶ switching cycles
Electrical service life of AC coil	> 7x10 ⁵ Switching cycles	Electrical service life, DC coil	> 5x10 ⁵ switching cycles

General data

Wire connection method	Screw connection	Humidity	40 °C / 93 % rel. humidity, no condensation
------------------------	------------------	----------	--

Insulation coordination

Creepage and clearance distance input – output	> 3 mm	Rated voltage	250 V
Impulse withstand voltage	4 kV	Protection degree	IP 20
Pollution severity	2	Surge voltage category	III

Other technical data

Version	Relay coupler	Protective circuit	Integrated free-wheel diode, Reverse polarity protection
---------	---------------	--------------------	--

Further details of approvals / standards

Certificate No. (CSA)	082859-C-000	Standards	DIN EN 50178
-----------------------	--------------	-----------	--------------

RS-SERIES RS 30 24VDC LD BL/SL 1U

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technische Daten

Connection data

Clamping range, rated connection	2.5 mm ²	Clamping range, rated connection, max.	4 mm ²
Clamping range, rated connection, min.	0.5 mm ²	Stripping length, rated connection	8 mm
Wire connection method	Screw connection		

Classifications

ETIM 3.0	EC001437	UNSPSC	30-21-19-17
eClass 5.1	27-37-16-01	eClass 6.2	27-37-16-01
eClass 7.1	27-37-16-01		

Approvals

Approvals



ROHS Conform

Downloads

Declaration of Conformity [K032_09_10.pdf](#)